


# CoastLine

CORDAGE GROUP

## Double Braided Polyester Rope

- High strength, static elongation, excellent feel and wet strength
- Available with Mil Spec marine finish polyester
- Custom colors, patterns, MBS, and designs are offered.

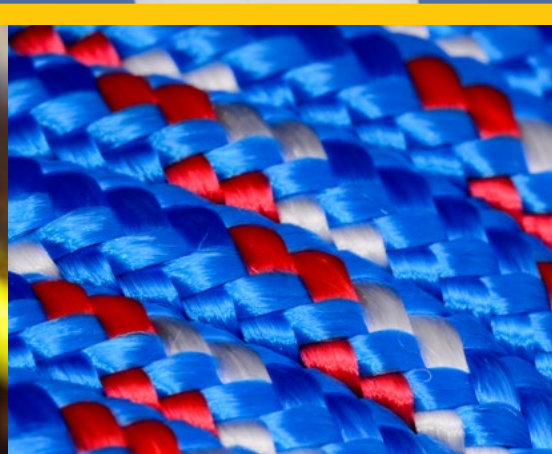

# Double Braided Polyester Rope



- Ideal for winch lines, utility pulling lines, towing lines, offshore anchor and lifting lines, arborist ropes, and more
- Minimum Tensile Strengths shown are for new (unused) rope and will decrease after use
- Tensile Strengths are decided in accordance with Cordage Institute 1500, Test Methods for Fiber Rope
- Maximum Working Loads are determined by dividing the tensile strength by the safety factor. Safety factors vary from 3:1 to 20:1
- Factory Splicing Various types are available for all ropes. Splices upon request and can be provided with various types of chafe protection or coatings
- Custom Lengths designs, patterns and lengths are available on request

We are an SGS certified ISO:9001-2015 company. All employees of CCG are educated in the following standards of cordage manufacturing.



DIAMETER		SIZE	APPROXIMATE WEIGHT		MINIMUM TENSILE STRENGTH	
mm	inches	circ inches	Kg/100m	lbs/100ft	kN	lbs
6	1/4	3/4	3.6	2.4	10.7	2,400
8	5/16	1	5.4	3.6	16.0	3,600
10	3/8	1-1/8	7.1	4.8	21.4	4,800
11	7/16	1-1/4	9.4	6.3	28.0	6,300
12	1/2	1-1/2	12.8	8.6	37.4	8,400
14	9/16	1-3/4	16.5	11.1	47.8	10,750
16	5/8	2	19.5	13.1	54.7	12,300
18	3/4	2-1/4	28.0	18.8	77.4	17,400
22	7/8	2-3/4	38.1	25.6	106.8	24,000
24	1	3	49.9	33.5	138.8	31,200
28	1-1/8	3-1/2	63.1	42.4	175.7	41,681
30	1-1/4	3-3/4	77.8	52.3	214.0	48,100
32	1-5/16	4	86.0	57.8	236.2	53,100
36	1-1/2	4-1/2	112.2	75.4	286.0	64,300
40	1-5/8	5	131.3	88.2	346.1	77,800
44	1-3/4	5-1/2	153.3	103.0	396.8	89,200
48	2	6	199.4	134.0	489.3	110,000



COASTLINE Ropes Manufactured by CoastLine Group. © CoastLine Group.