ZUZA CATALOG PRODUCT CATALOG

POWER ON. AND ON."



For well over fifty years, ECHO has been an industry leader in providing equipment with power, innovation and quality that allows users to tackle any outdoor task.

Whether it's professional landscapers and arborists that use our products every day to homeowners who simply want the best product for the job, our reputation for power and performance makes ECHO the perfect choice. For 2024, there's over 200 products in our portfolio of equipment, including a full assortment of homeowner and commercial battery powered equipment with similar power and performance as our legendary gas products. Each tool is designed for a specific task to optimize productivity and provide the satisfaction of a job well done.

Thank you for choosing ECHO and powering on with us.

Harold Redman

President and CEO ECHO Incorporated

TABLE OF CONTENTS

ECHO eFORCE [®] 56V Battery System	4
Accessories	17
ECHO Robotics	18
Accessories	21
Trimmers & Brushcutters	22
Accessories	27, 30
Trimmer Features/Specs	32
Brushcutter Features/Specs	34
Edgers & Accessories	36
Features/Specs	37
Blowers	38
Accessories	40
Features/Specs	42
Chainsaws - Arborist Saws	44
Features/Specs	52
Bars & Chains	54
Accessories	48
Chainsaws - Rear Handle	47
Accessories	46
Features/Specs	52
Bars & Chains	54

Power Pruners [®]	
Accessories	
Bars & Chains	
Features/Specs	
Cut-Off Saw & Accessories/Specs	
Hedge Trimmers	
Accessories	
Features/Specs	
Pro Attachment Series [™]	
Attachements	
Features/Specs	
Spreaders	
Pressure Washers	
Accessories	
Features/Specs	
Wheeled Trimmers	
Accessories	
Wheeled Trimmer Line	
Fire Pump	
Chipper/Shredders	
Accessories	

Sprayers	74
Accessories	75
Features/Specs	75
Generators	76
Accessories	77
Features/Specs	77
Engine Drill, Earth/Ice Auger, Tiller/Cu	ltivator. 78
Accessories	79
Features/Specs	79
Hand Tools	80
Accessories	81
Red Armor [®]	82
Oil	83
YouCan [®] Maintenance Kits	83, 84
Personal Protection Equipment	85
Landscaper Fleet Program	86
Warranty Statement/Chart	87

PRODUCT ICONS

See below for enhanced explanations of select product feature icons throughout the catalog.



ENGINEERED FOR OUTDOOR WORK



On-board indicator

For quick checks on battery charge level



eCM Technology[®] Provides heat, charge, and discharge management



High-capacity For increased run time



ECHO has built a reputation based on our products' superior quality and performance, and our battery-powered tools are no exception. The ECHO eFORCE® 56V Battery System is a single battery platform for the full range of ECHO 56V battery-powered equipment, featuring proprietary technologies and advanced manufacturing which deliver the legendary power that ECHO is known for.

Battery-powered tools offer several advantages including easy starting, simple operation, low noise levels, and minimal maintenance requirements. The ECHO eFORCE® platform offers the ideal balance of maximum power, lightweight design, and extended run times, enabling users to tackle even the toughest jobs.

Product Icons

See below for enhanced explanations of select product feature icons throughout the catalog.



Ê

Homeowner Use

EFORCE 56V BATTERY SYSTEM






Reputations are built over time and ECHO has a solid foundation that's 50 years in the making. The ECHO eFORCE[®] line of products is built upon the existing foundation of our gas-powered reputation. ECHO eFORCE[®] is one battery platform for all ranges of ECHO 56V featuring longlasting power that quickly swaps from product to product. The ECHO eFORCE[®] batteries feature ECHO's exclusive eCM Technology[®] to maximize the battery's lifetime.

ECHO eFORCE® 56V Battery system



eCM Technology®

ECHO's proprietary battery management system controls the temperature, charge and discharge to help prolong the life of the battery pack.



MAXOUT® Technology

Our exclusive MAXOUT[®] Technology, available on ECHO X Series 56V tools, ensures the unit operates like a gas-powered tool, meaning that you'll have maximum power output throughout the life of the battery charge. While some competitive tools may lose power as the battery discharges, MAXOUT[®] ensures you have 100% power, 100% of the time. So just like with a gas-powered tool, you can go full out until you run out.

CONEPLATFORM. SOV BATTERY SYSTEM CONEPLATFORM. ALLECHO.

MAKING INTELLIGENT POWER & TRUSTED PERFORMANCE SIMPLE.

• eCM Technology[®] manages heat, charge and discharging of batteries

MAXOUT[®] technology ensures maximum output for the life of the battery charge*

*select units

The ECHO eFORCE[®] 56V Battery System is the perfect choice for professional landscapers and homeowners seeking versatility and flexibility in their outdoor power equipment. It's a seamless solution, offering a unified battery platform to fuel a full range of ECHO 56V battery-powered products. The ECHO eFORCE[®] system includes multiple battery options that deliver a consistent and long-lasting 56V power supply that effortlessly transitions between various tools and provides extended runtime ensuring users can tackle every task at hand. With both kitted and bare tool options available for every tool, the ECHO eFORCE[®] Battery System provides the adaptability and reliability you need to power through every outdoor project.

NEW DPAS-2100 ↔ BATTERY-POWERED PRO ATTACHMENT SERIES™ POWERHEAD



The DPAS-2100 is the perfect all-in-one solution for homeowners. Being able to utilize one power head with 15 different attachments adds versatility while keeping the overall need for dedicated tools low. Now available as stand-alone powerhead with 2.5Ah battery and standard charger.

- Hi/Lo speed settings for optimized cutting and battery life
- Lightweight with cushioned handle grip for greater comfort
- Accepts 15 ECHO PAS attachments for incredible versatility

Battery (Amp Hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 28
Weight With Battery (lbs.)	7.9 (3.6 kg)

*Depending on battery size, charge level, attachment used, and operating conditions.

Multiply your outdoor power equipment solutions with the Pro Attachment Series[™]. 16 different attachments add versatility to your equipment and expand what you can accomplish with your ECHO eFORCE[®] system.

NEW DPAS-2600 😡 **BATTERY-POWERED PRO ATTACHMENT SERIES™ POWERHEAD**





Attachment capable up to 16 attachments




Tool-less coupler for fast, effortless changes

The DPAS-2600 powerhead is attachment-capable with a guick-change, tool-less coupler that accepts up to 16 compatible attachments, delivering powerful performance and versatility.

- Increased torgue for superior cutting performance
- Variable speed trigger for ultimate power control
- Accepts all 16 ECHO PAS attachments for incredible versatility
- MAXOUT[®] battery technology

Battery (Amp Hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 52
Weight With Battery (lbs.)	9.7 (4.4 kg)

*Depending on battery size, charge level, attachment used, and operating conditions.



MAXOUT[®] Technology maximum power output until full discharge



TOOLS In one!

ONE PLATFORM. ALFEGHO

EFORCE 56V BATTERY SYSTEM



The attachment-capable DPAS-2100SB comes equipped with a Speed-Feed® 400 trimmer head attachment and can quickly connect to 15 compatible attachments.

- Hi/Lo speed settings for optimized cutting and battery life
- Lightweight with cushioned handle grip for greater comfort
- Accepts 15 ECHO PAS attachments for incredible versatility

Battery (Amp hour)	2.5
Avg Run Time w/2.5Ah (min)*	Up to 28
Weight with Battery (lbs.)	10.7 (4.85 kg)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	14-16

*Depending on battery size, charge level, attachment used, and operating conditions.

16 TOOLS IN ONE!

© DPAS-2600SB BATTERY-POWERED PRO ATTACHMENT SERIES™ TRIMMER

2 YEAR WARRANTY 5 YEAR

The DPAS-2600SB is attachment-capable with a quickchange, tool-less coupler that accepts up to 16 compatible attachments delivering powerful performance and versatility.

- Increased torque for superior cutting performance
- Variable speed trigger for ultimate power control
- Accepts all 16 ECHO PAS attachments for incredible versatility
- MAXOUT[®] battery technology

Battery (Amp hour)	5.0
Avg Run Time w/5.0Ah (min)*	Up to 52
Weight with Battery (lbs.)	12.7 (5.8 kg)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17

*Depending on battery size, charge level, attachment used, and operating conditions.



TRIMMERS

All-day comfort. All-job performance. ECHO string trimmers and brushcutters justify their hard-earned reputation with some of the most powerful features grass and brush has ever faced.



The DSRM-2100 straight-shaft string trimmer delivers the quiet, convenience and performance needed to cut grass down to size in residential areas.

- Hi/Lo speed settings for optimized cutting and battery life
- Lightweight with cushioned handle grips for greater comfort
- Variable speed trigger for ultimate power control

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 56
Weight with Battery (lbs.)	9.75 (4.4 kg)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	14-16

*Depending on battery size, charge level, cutting swath, and operating conditions.

A Charles

DSRM-2600 BATTERY-POWERED TRIMMER

YEAR

YEAR

The DSRM-2600 straight-shaft string trimmer meets the demands of professional workdays. With MAXOUT® technology, it provides maximum power output for the life of the battery charge.

- Increased torque for superior cutting performance
- Variable speed trigger for ultimate power control
- Large 17 in. cutting swath clears more area quicker
- MAXOUT® battery technology

Battery (Amp hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 54
Weight with Battery (lbs.)	11.9 (5.4 kg)
Cutting Head	Speed-Feed® 400
Cutting Swath (in.)	17

*Depending on battery size, charge level, cutting swath, and operating conditions.



DSRM-2600U BATTERY-POWERED BRUSHCUTTER

The DSRM-2600U brushcutter pushes productivity to the next level. With a lightweight, ergonomic design and legendary ECHO power, it's ready to tackle long days of long weeds and grasses.

- Increased torque for superior cutting performance
- Variable speed trigger for ultimate power control
- Equipped for blade use (blade sold separately)
- MAXOUT[®] battery technology

Battery (Amp hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 54
Weight with Battery (lbs.)	13.45 (6.1 kg)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17

*Depending on battery size, charge level, cutting swath, and operating conditions.



full discharge

Patented quickdraw harness ring for easy, secure access

12 in. bar and chain for better cutting performance

Automatic chain oiler & semi-transparent oil tank for user convenience



DCS-2500T BATTERY-POWERED TOP HANDLE CHAINSAW

A lightweight beast that is perfect for high-climbing professional arborists, the DCS-2500T was made for easy in-tree maneuverability.

- Ultra-lightweight design
- Patented harness ring for easy and secure access
- Adjustable top mounted oiler conserves oil
- MAXOUT® battery technology

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 60 cuts
Weight with Battery (lbs.)	7.3 (3.3 kg)
Bar Length (in.)	12
Oil Capacity (fl. oz.)	4.1 (120 ml)

*In 4in. by 4in. timber, depending on battery size, charge level, and operating conditions.

CHAINSAWS

Whether your day calls for felling an old oak, making nimble cuts 60-feet up or bucking firewood down to size, ECHO chainsaws provide the power and durability to make light work of the toughest jobs.

do the pros need from a battery powered chainsaw?

WIAL ECHO asked, then designed the DCS-2500T to meet their demanding standards. On the strength of the ECHO eFORCE[®] 56V battery system, this lightweight beast is perfect for high-climbing professional arborists.



NEW DCS-2500TN CO BATTERY-POWERED TOP HANDLE CHAINSAW

The ECHO DCS-2500TN chainsaw is lightweight and includes the 80TXL cutting system which features a nano-style chain for more efficient cutting with less vibration.

- Alternate bar and chain for reduced vibration and more
 efficient cutting
- Ultra-lightweight design
- Patented harness ring for easy and secure access
- Adjustable top mounted oiler conserves oil
- MAXOUT[®] battery technology

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 70 cuts
Weight with Battery (lbs.)	7.3 (3.3 kg)
Bar Length (in.)	12
Oil Capacity (fl. oz.)	4.1 (120 ml)

 $^{*}\mbox{In}$ 4in. by 4in. timber, depending on battery size, charge level, and operating conditions.

DCS-5000 ® BATTERY-POWERED REAR HANDLE CHAINSAW

Convenient, packed with features, and most importantly, packed with power. Capable of 200 cuts on a single charge, the DCS-5000 harnesses the professional-grade power of the ECHO eFORCE* 56V battery system for smooth, easy cuts and all-day performance.

- 18 in. bar and chain for larger cuts
- Flip-lever oil cap for easy removal
- Brushless motor
- Metal bumper spike for greater control

Battery (Amp hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 200 cuts
Weight with Battery (lbs.)	14.6 (6.6 kg)
Bar Length (in.)	18
Oil Capacity (fl. oz.)	7.44 (220 fl. oz.)

*In 4in. by 4in. timber, depending on battery size, charge level, and operating conditions.



EFORCE 56V BATTERY SYSTEM



BLOWERS

Debris doesn't stand a chance. With ergonomic features and some of the most powerful specs ever produced, ECHO handheld blowers and backpack blowers make cleanup a breeze.

NEW



The battery-powered blowing force the landscaping world has been waiting for. The DPB-2500 handheld blower can blow 549 CFM at 158 MPH (254 km/h). It's ideal for use in locations that restrict gas-powered blowers.

• Turbo button boosts performance

- Variable-speed throttle with cruise control
- Low noise, 65 dB(A)* output for noise sensitive environments

Battery (Amp hour)	2.5 or 5.0
Avg. Run Time w/2.5Ah Battery (min)	9 ³ /15 ² /90 ¹
Weight w/2.5Ah Battery (lbs.)	7.7 (3.5 kg)
Avg. Run Time w/5.0Ah Battery (min)	18 ³ /30 ² /180 ¹
Weight w/5.0Ah Battery (lbs.)	9.5 (4.3 kg)
Blowing Force (N)	15/174
Max Air Speed (mph) ³	158 (254 km/h)
Air Volume (CFM) ³	549

*Per ANSI B175.2-2012 ¹On low-speed setting depending on battery size, charge level, and operating conditions ²On high-speed setting ³On turbo mode ⁴With 5.0Ah battery

DPB-5800T © BATTERY-POWERED BACKPACK BLOWER

The DPB-5800T three-port battery-powered backpack blower delivers up to 795 CFM at 195 MPH (314 km/h) making it a powerful mid-range blower tailored perfectly to homeowner use and light commercial applications.

2 YEAR COMMERCIAL WARRANTY 5 YEAR CONSUMER CONSUMER

- Triple battery port provides maximum run times
- Variable speed lever with cruise control allows operator to maintain the desired speed setting providing more operator control
- Rubber over molded grip provides comfort and control
- Posi-loc™ blower tubes keep pipe connection secure for maximum durability

Battery (Amp hour)	Two 5.0
Avg. Run Time w/2 5.0Ah Battery (min)	35/20 ¹
Weight w/2 5.0Ah Battery (lbs.)	23.5 (10.7 kg)
Avg. Run Time w/3 5.0Ah Battery (min)	50/26 ¹
Weight w/3 5.0Ah Battery (lbs.)	27.5 (12.5 kg)
Blowing Force (N)	25 ¹
Max Air Speed (mph) ¹	195 (314 km/h)²
Air Volume (CFM) ¹	795 ³

*Depending on battery size, charge level, and operating conditions. Per ANSI B175.2-2012 'On turbo mode ²With concentrator nozzle ³With two 5.0Ah batteries on turbo mode and without concentrator nozzles

HEDGE TRIMMERS

YEAR

From precise artistic shaping to heavier-duty, difficult-to-reach cuts, ECHO hedge trimmers deliver reliable, versatile performance for professionals and discerning homeowners alike.



The quiet, lightweight DHC-2300 hedge trimmer, powered by the eFORCE^{*} 56V battery system, makes precision cuts with a lightning-fast 53 strokes per second, trimming time and effort off the workday.

- 22 in. double-sided blades for more productivity
- 3,200 blade strokes per minute for ultra fast cuts
- 1.1 in. cutting capacity for heavy use

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 88
Weight with Battery (lbs.)	9.15 (4.2 kg)
Blade Length (in.)	22

*Depending on battery size, charge level, and operating conditions

NEW DHC-2200 BATTERY-POWERED HEDGE TRIMMER

The DHC-2200 and DHC-2800 hedge trimmers are built with commercial-grade construction and a highefficiency motor, while remaining light enough to tackle a wide array of cutting applications.

- 22 in. double-sided, double-reciprocating RazorEdge® blades
- 5-position 180-degree rotating handle for increased
- maneuverability4,600 blade strokes per minute for ultra fast cuts

YEAR

(EAR

MAXOUT[®] battery technology

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min) [•]	Up to 60
Weight with Battery (lbs.)	8.6 (3.9 kg)
Blade Length (in.)	22

*Depending on battery size, charge level, and operating conditions

BATTERY-POWERED HEDGE TRIMMER The DHC-2200 and DHC-2800 hedge trimmers are built with commercial-grade construction and a highefficiency motor, while remaining light enough to tackle a

- 28 in. double-sided, double-reciprocating RazorEdge® blades
- 5-position 180-degree rotating handle for increased maneuverability
- 4,600 blade strokes per minute for ultra fast cuts

wide array of cutting applications.

MAXOUT[®] battery technology

YEAR

YEAR

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 60
Weight with Battery (lbs.)	9.1 (4.1 kg)
Blade Length (in.)	28

*Depending on battery size, charge level, and operating conditions

NEW

↔ DHC-2800











The DPE-2100 allows homeowners to carve through dirt, grass, and weeds to achieve professional lines along sidewalks and driveways. Utilizing a very similar lower end to our trusted PE-225, this Homeowner edger comes equipped with a molded shield for extra debris protection and will run up to 40 minutes on a single charge with included battery.

- · Captive wheel mount hardware for easy wheel height adjustability
- 2 speed settings for extended battery life or power when needed
- Variable speed trigger for ultimate control

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min) [*]	Up to 40
Weight with Battery (lbs.)	11.9 (5.4 kg)
Blade Length (in.)	7.75

*Depending on battery size, charge level, and operating conditions

NEW **ODPE-2600**

Combining power and torgue with lightweight construction, the DPE-2600 allows commercial landscapers to carve through dense dirt giving properties a clean and professional finish. With MAXOUT® technology, it provides maximum power output for the life of the battery charge.

- Contoured aluminum shield with sight line and cut away open face prevents clogging
- 2:1 gear reduction to power through tough overgrown grass
- 3 speed settings and variable speed trigger for control
- MAXOUT[®] battery technology

Battery (Amp hour)	5.0
Avg. Run Time w/2.5Ah (min)*	Up to 86
Weight with Battery (lbs.)	14.1 (6.4 kg)
Blade Length (in.)	7.75

*Depending on battery size, charge level, and operating conditions

POWER PRUNERS®

NEW **DPPF-2100** 🙃 **BATTERY-POWERED POWER PRUNER®**

The DPPF-2100 delivers exceptional performance for pruning branches in hard-to-reach places from the ground. This efficient, smooth cutting Power Pruner® is perfect for the homeowner.

- Variable speed trigger to match cutting conditions
- Translucent bar and chain oil tank to easily check oil levels
- Automatic, adjustable oiler helps maintain bar and chain life

Battery (Amp hour)	2.5
Avg. Run Time w/2.5Ah (min)*	Up to 100 cuts
Weight with Battery (lbs.)	12.7 (5.8 kg)
Bar Length (in.)	10
Overall Length (in.)	96

*Depending on battery size, charge level, and operating conditions





NEW DPPT-2600H BATTERY-POWERED POWER PRUNER®

The DPPT-2600H offers a high-performing, telescopic shaft Power Pruner® that delivers top-tier performance for pruning. With MAXOUT® technology, it provides maximum power output for the life of the battery charge.

5 YEAR

- Telescoping shaft for extended reach from the ground
- Variable speed trigger to match cutting conditions
- Automatic, adjustable oiler helps maintain bar and chain life
- MAXOUT[®] battery technology

Battery (Amp hour)	5.0
Avg. Run Time w/5Ah (min)*	Up to 200 cuts
Weight with Battery (lbs.)	18.1 (8.2 kg)
Bar Length (in.)	10
Overall Length (in.)	107-146

*Depending on battery size, charge level, and operating conditions

BATTERY-POWERED TRIMMER & BLOWER **COMBO KIT** DCP-BVRVS1B ©

56V Battery-powered combo kit featuring DRSM-2100 and DPB-2500.

- 16 in. trimmer with #1 professional trimmer head
- Blower delivers 158 mph, 549 CFM and up to 17N
- 2.5Ah battery and standard charger included

Cutting Head	Speed-Feed [®] 400
Newton Blowing Force (N)	17
Max Air Speed (mph)*	158 (254 km/h)
Air Volume (CFM)	549
*On turbo mode	





Ideal for yards up to 1/3 acre, the DLM-2100 push lawn mower, powered by the ECHO eFORCE[®] 56V battery system, delivers hassle-free mowing with legendary ECHO power.

- Large 21 in. heavy-duty steel deck cuts more area faster
- 3-in-1 discharge for mulching, bagging or side discharge (sold separately)
- Auto-switch dual-battery dock for uninterrupted mowing and less downtime

Battery (Amp hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 70
Cutting Width (in.)	21
Cutting Height (in.)	1-4

*Depending on battery size, charge level, and operating conditions



Side Discharge Chute Part#: YH479002480

DLM-2100SP (b) BATTERY-POWERED SELF-PROPELLED LAWN MOWER



The DLM-2100SP self-propelled mower provides effortless and efficient mowing. With an auto-switch dual-battery dock, three quick-switch clippings discharge settings and a large 21in. cutting deck, it makes cuts without compromise.

- Large 21 in. heavy-duty steel deck cuts more area faster
- 3-in-1 discharge for mulching, bagging or side discharge
- Auto-switch dual-battery dock for uninterrupted mowing and less downtime

Battery (Amp hour)	5.0
Avg. Run Time w/5.0Ah (min)*	Up to 70
Cutting Width (in.)	21
Cutting Height (in.)	1-4

*Depending on battery size, charge level, and operating conditions

EXPEGT More from your mower

16

BATTERIES/GHARGERS The ECHO eFORCE® 56V Battery System utilizes high-capacity lithium-ion batteries with on-board charge level indicators to easily monitor charging status. Available in three sizes to best match each users' runtime needs, all ECHO eFORCE[®] 56V batteries are equipped with ECHO's exclusive eCM Technology[®] providing heat, charge and discharge management to help prolong the life of the battery. All ECHO eFORCE[®] batteries are compatible with all 56V chargers for the ultimate in versatility and convenience.

YEAR BATTERY WARRANTY



56V 2.5AH BATTERY

- 75 min. charge time with standard charger
- 38 min. charge time with rapid charger
- 38 min. charge time with dual port charger
- 150 min. charge time with top mount charger

• 2.25 lbs., 126 watt-hours Part#: LBP-56V125



56V 5.0AH BATTERY

- 150 min. charge time with standard charger
- 75 min. charge time with rapid charger
- 48-75 min. charge time with dual port charger
- 300 min. charge time with top mount charger

• 4.05 lbs., 252 watt-hours

Part#: LBP-56V250







56V 8.0AH BATTERY

- 225 min, charge time with standard charger
- 120 min. charge time with rapid charger
- 60-100 min. charge time with dual port charger
- 480 min. charge time with top mount charger
- 5.6 lbs., 402 watt-hours
- Part#: LBP-56V400



56V STANDARD CHARGER

- On-board LED diagnostics
- Optional wall mount
- 6 ft. cord length for convenient charging



NEW





56V RAPID CHARGER

- 2X faster than standard charger
- On-board LED diagnostics
- Optional wall mount
- 6 ft. cord length for convenient charging
- Part#: LC-56V4A







56V TOP MOUNT CHARGEF

• On-board LED diagnostics • 6 ft. cord length for convenient charging Part#: LC-56V1A





- Simultaneously rapid charge 2 batteries
- Ultra-rapid charging when used with just one battery
- On-board LED diagnostics
- 1 USB-A and 1 USB-C port
- Optional wall mount
- 6 ft. cord length for convenient charging

Part#: LC-56V5A2



ARE YOU READY TO CHARGE UP YOUR TEAM?

Tough time finding employees? Our autonomous mowing solution for sports fields, golf courses, yards, and industrial sites can support your team and allows reallocation of resources towards more important tasks.




Not only are our Turf Mowers autonomous and emissions free, but they also promote healthier and better-looking turf. Their performance can be monitored and controlled from anywhere in the world through our online web portal or smartphone app. For golf applications, our Range Picker models can collect golf balls on the same field as the Turf Mowers, bringing them to a designated drop station. Optional protection discs on the mowers prevent damage to blades and golf balls, while the mower's light weight (less than 160 lbs.) reduces soil and ball compaction.





Real-Time Kinematic

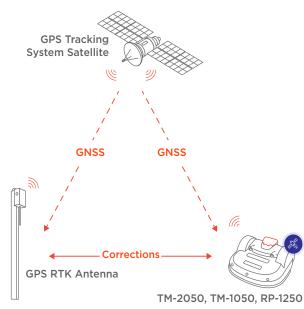

The robot is now able to:

- **Pattern Mow:** standard or customized pattern options to give your field that clean sharp look.
- **One Inch Accuracy:** with real-time kinematics, the robot navigates with precision allowing it to overlap with minimal overlap.
- **Triple the Mowing Capacity:** ability to do more with less.(compared to a random pattern unit)
- More Efficient Ball Collection: utilizing a drop pit the unit is always working to provide a clean picked range every day.



ECHO now offers its new Wisenav[®] system for all GPS-RTK models. Wisenav[®] is a complete system that builds on our high-accuracy pattern mowing technology and removes the need for burying a perimeter wire around the robot's working area.

Wireless navigation is finally here, achieving maximum efficiency and flexibility.

- No field wire needed
- Draw and adjust working areas remotely
- Border mode creates a smooth perimeter around the final cut
- All sites within a 5-mile radius can be controlled by only one 4G RTK base
- Weather protection software sends the robot back to its charging station if there is a risk of flooding





TM-2000 TM-2050

All Models

- Quiet operation for use in noise-sensitive areas
- Autonomous—operates 24/7
- Advanced automation, guidance, and safety features let you rest assured the job's being done right
- Remote command and performance monitoring because work doesn't stop when you're busy doing other things
- Emissions-free operation aids the environment and creates a better experience for customers
- Professional installation customized for your site



TM-1000 TM-1050

TM Series


- Gives your turf a freshly mowed look all day, every day
- Special protective discs allow for continuous mowing without damaging balls on range (option)
- No need to shut down the range for mowing
- RTK models mow in patterns of consecutive rows. This triples the mowing capacity of a single random unit



RP Series

- Lightweight unit reduces compaction of turf and golf balls
- Prevents downtime and customer nconvenience, as you will never have to close the range
- Can be programmed to spend more time on highdensity areas to improve picking efficiency
- RTK model increases picking efficiency by picking in pattern and quickly navigating to the drop station

	TM-2050 GPS-RTK	TM-1050 GPS-RTK	RP-1250 GPS-RTK	TM-2000 RANDOM	TM-1000 RANDOM
Capacity					
Maximum Working Area*	15 Acres	10 Acres	8 Acres	6 Acres	3 Acres
Recommended Working Area*	12 Acres	7 Acres	7 Acres	5 Acres	2.5 Acres
# Sport Fields/Robot	1-5	1-3	-	1-2	1
Basket Capacity	-	-	320-350 Balls	-	-
Daily Capacity	-	-	Up To 12,500 Balls	-	-
Maximum Slope	30%	35%	30%	30%	35%
Cutting / Picking					
Mowing / Picking Width	40.7 in.	24.9 in.	37.6 in.	40.7 in.	24.9 in.
# Cutting Heads	5 Floating Heads	3 Floating Heads	-	5 Floating Heads	3 Floating Heads
# Blades	15	9	-	15	9
Mowing Height Range	.75 ~ 4 in.	.75 ~ 4 in.	-	.75 ~ 4 in.	.75 ~ 4 in.
Specifications					
Weight	159 lbs.	115 lbs.	188 lbs.	159 lbs.	115 lbs.
Dimensions (Length x Width x Height)	3.6 ft. x 4.2 ft. x 1.7 ft.	3.3 ft. x 3.4 ft. x 1.5 ft.	3.9 ft. x 4.4 ft. x 1.8 ft.	3.6 ft. x 4.2 ft. x 1.7 ft.	3.3 ft. x 3.4 ft. x 1.5 ft.
Maximum Noise at 3 ft.	52dB	52dB	61dB	52dB	52dB
Average Annual Consumption**	830 kWh	580 kWh	620 kWh	830 kWh	580 kWh

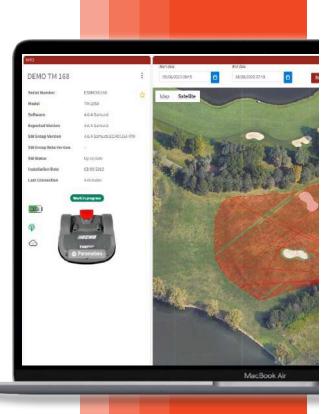

* Mowing capacity and maximum working area may vary depending on the quality and layout of the terrain and the presence of obstacles

** Consumption may vary depending on the given conditions and use

ROBOTIC ACCESSORIES



GPS RTK Base Station WiFi

For single and non-complex installation

Up to 650 ft (200 m)Requires line of sight

Part#: ES06000035

Mobile 4G

For large/multiple installation

- Up to 5 miles
- Does not require line of sight to robot
- 5-year 4G connection included

Part#: ES06000036



Charging Station

Each robot will navigate its own way back to its charging station when needed, and then return to work. No vacation days needed. Part#: CGSL21AF1C

Turf Mower Replacement Blades

Small razor blades are all that is needed to keep grass looking freshly cut all year long. Part#: YB06220026





Portal Website and App

A web portal and mobile app offer you remote command access, analytics, layout control, and scheduling for your robots.





TRIMMERS

Performance is the defining trait of ECHO's worldrenowned commercial-grade string trimmers and brushcutters. ECHO's intuitive custom ergonomic controls, lightweight construction, and professionalgrade 2-stroke engine technologies allow you to maximize your productivity. Whether your task demands a curved shaft model for simple, precise trimming around posts and fences, or a straight shaft alternative for extended reach, ECHO trimmers are engineered for optimal performance.

SUGGESTED TRIMMER APPLICATION



CURVED SHAFT TRIMMER

Lightweight and easy to use. The popular GT-225 curvedshaft trimmer features an i-30[™] ignition for starts with 30% lesse ort. A 2-line Rapid Loader[®] trimmer head increases productivity while decreasing workload.

- i-30[™] starter reduces starting effort by 30%
- Ergonomic adjustable handle for a custom fit
- Curved shaft for easy maneuverability

Engine (cc)	21.2
Weight (lbs.)	10.1 (4.6 kg)
Shaft Length (in.)	48
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Rapid Loader*
Cutting Swath (in.)	16

The GT-225i curved-shaft string trimmer features an i-75[™] ignition system, delivering reliable, easy starts with 75% less effort. Its ergonomic, maneuverable design ensures precision control with powerful results.

🗠 🛈 GT-225i

CURVED SHAFT TRIMMER

- i-75[™] starter reduces starting effort by 75%
- Ergonomic adjustable handle for a custom fit
- Curved shaft for easy maneuverability

Engine (cc)	21.2
Weight (lbs.)	10.6 (4.8 kg)
Shaft Length (in.)	48
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Rapid Loader*
Cutting Swath (in.)	16

CURVED SHAFT TRIMMER

The GT-225SF curved-shaft string trimmer powers a Speed-Feed® 400 trimmer head for quick string reloads without disassembly. An i-30[™] system also reduces starting effort by 30%, ensuringe cient productivity.

- Speed-Feed® 400 head reloads in seconds without disassembly
- i-30[™] starter reduces starting effort by 30%
- Ergonomic adjustable handle for a custom fit
- Curved shaft for easy maneuverability

Engine (cc)	21.2
Weight (lbs.)	10.8 (4.9 kg)
Shaft Length (in.)	48
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	16

CURVED SHAFT TRIMMER

The GT-225L curved shaft trimmer features a 55-inch shaft to increase reach and decrease effort. With a Speed-Feed® 400 trimmer head and an i-30[™] starting system, it maximizes productivity without adding more work to the workday.

- Extended shaft length provides longer reach for residential yard touch-ups
- i-30[™] starter reduces starting effort by 30%
- Rubber over-molded throttle handle
- Curved shaft for easy maneuverability

Engine (cc)	21.2
Weight (lbs.)	11.2 (5.1 kg)
Shaft Length (in.)	55
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Speed-Feed* 400
Cutting Swath (in.)	16

The SRM-225 straight-shaft string trimmer has earned its reputation through countless long days and tough jobs. With a quick-loading Speed-Feed® 400 trimmer head and 59-inch shaft, it takes convenience and productivity to a new level.

SRM-225

STRAIGHT SHAFT TRIMMER

- i-30[™] starter reduces starting effort by 30%
- Ergonomic cushioned front and rear handles for user comfort
- Tool-less, easy-access, commercial-grade felt air filter for durability

Engine (cc)	21.2
Weight (lbs.)	11.5 (5.2 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17

STRAIGHT SHAFT TRIMMER

The SRM-225i straight-shaft string trimmer features an i-75[™] starting system to reduce effort by 75%. A Speed-Feed[®] 400 trimmer head reloads in seconds, minimizing downtime and increasing productivity.

- i-75[™] starter reduces starting effort by 75%
- Ergonomic cushioned front and rear handles for user comfort
- Tool-less, easy-access, commercial-grade felt air filter for durability


Engine (cc)	21.2
Weight (lbs.)	12 (5.4 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Speed-Feed* 400
Cutting Swath (in.)	17

STRAIGHT SHAFT TRIMMER

The SRM-266 straight-shaft string trimmer is built to power through tough jobs without slowing down. A Speed-Feed® 400 trimmer head reduces string replacement time, frequency and effort, making light work of long days.

- i-30[™] starter reduces starting effort by 30%
- Two-stage commercial-grade air filtration for long engine life
- Tool-less, easy-access, commercial-grade felt air filter for durability

Engine (cc)	25.4
Weight (lbs.)	13.4 (6.1 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	16.9 (500 ml)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17

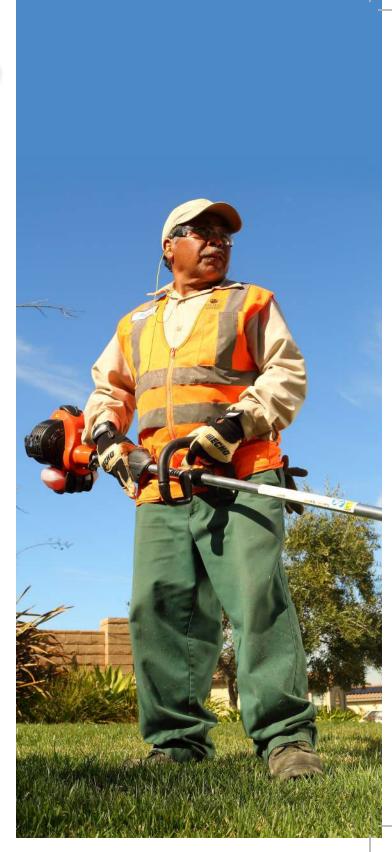

PROUSE TAMME



The high-torque SRM-2320T straight-shaft string trimmer increases productivity while decreasing fatigue. With a 2:1 gear ratio, it delivers 28% more torque than the SRM-225, making quick work of overgrown grasses.

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Chrome cylinder plating increases engine life

Engine (cc)	21.2
Weight (lbs.)	12.2 (5.5 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	12.8 (378 ml)
Cutting Head	Speed-Feed* 400
Cutting Swath (in.)	17

The SRM-2620 straight-shaft string trimmer cuts tough job sites down to size. With a Speed-Feed® 400 cutting head and easy starts in any condition, it's the most reliable member of any professional landscaping crew.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc)	25.4
Weight (lbs.)	12.6 (5.7 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	20.6 (609 ml)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17

SERIES

Image: SRM-2620

STRAIGHT SHAFT TRIMMEI



- 2 25.4 cc professional-grade 2-stroke engine
- **3** Debris shield with integrated cut-off knife
- 4 Tool-less air filtration system
- 5 Over-molded front and rear hand grips
- 6 2:1 gear reduction
- 7 20.6 fl. oz. fuel tank

The SRM-2620T straight-shaft string trimmer features a 2:1 gear ratio that delivers higher torque, and comes with a Speed-Feed® 400 cutting head and an impressive power-to-weight ratio.

STRAIGHT SHAFT TRI

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc)	25.4
Weight (lbs.)	12.8 (5.8 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	20.6 (609 ml)
Cutting Head	Speed-Feed® 400
Cutting Swath (in.)	17

STRAIGHT SHAFT TRIMMER

Make workdays more ecient and productive with the class-leading SRM-3020 straight-shaft string trimmer. Featuring lightweight construction, a Speed-Feed® 500 cutting head and a 20 in. cutting swath, it quickly powers through one job and onto the next.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort

Engine (cc)	30.5
Weight (lbs.)	13.7 (6.2 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	24 (710 ml)
Cutting Head	Speed-Feed [®] 500
Cutting Swath (in.)	20

The high-torque SRM-3020T straight-shaft string trimmer comes with a Speed-Feed® 500 cutting head, ergonomic design and easy, reliable starting inspires confidence and increases productivity.

STRAIGHT SHAFT TR

- 2:1 high-torque gear ratio to power through tough overgrown grass and weeds
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Overmolded front and rear hand grips for extreme comfort


Engine (cc)	30.5
Weight (lbs.)	13.9 (6.3 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	24 (710 ml)
Cutting Head	Speed-Feed [®] 500
Cutting Swath (in.)	20

SRM-410X

The most powerful model from the brand synonymous with professional-grade power. The ECHO SRM-410X straight-shaft string trimmer levels tough, overgrown weeds and grass with power to spare.

- Solid steel drive shaft for smooth acceleration and light weight
- Pleated paper air filter for use in harsh conditions
- Equipped for use with a blade (blade sold separately)
- 2-in-1 shield

Engine (cc)	42.7
Weight (lbs.)	18.4 (6.3 kg)
Shaft Length (in.)	60.2
Fuel Capacity (fl. oz.)	32.1 (710 ml)
Cutting Head	Speed-Feed [®] 500
Cutting Swath (in.)	20

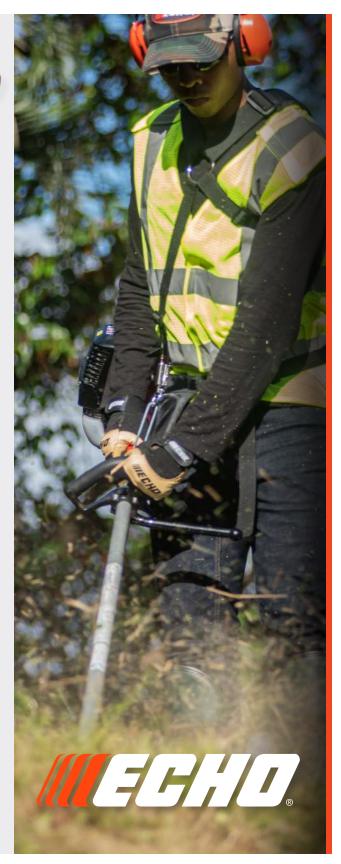

TRIMMER ACCESSORIES

Edger Attachment

Fits SRM-266 and SRM-2620/T. Part#: 99944230001



Red Armor[®] Oil

2-stroke semi-synthetic engine oil formulated with powerful detergents and antioxidants to clean existing deposits, protect against future carbon build-up and promote longer engine life.

Part #: 6550001	2.6 fl. oz. (77 ml)	(8) 6 pks.	1 gallon mix (22.7 L)
Part #: 6550025	6.4 fl. oz. (189 ml)	(8) 6 pks.	2.5 gallon mix (9.5 L)
Part #: 6550005	12.8 fl. oz. (379 ml)	12 per case	5 gallon mix (19 L)
Part #: 6550050	1 gallon (3.8 L)	4 per case	50 gallon mix (189 L)
Part #: 6550250	5 gallons (19 L)	1 pail	250 gallon mix (946 L)



SUGGESTED BRUSHCUTTER APPLICATION



SRM-225U





SRM-2620U DSRM-2600U

SRM-3020U

SRM-410U

Speed-Feed[®] trimmer head Durable debris shield with cut-off knife 59" straight shaft with flex cable drive

Rubber over-mold grip

i-30[™] starting technology

8 in. 8-tooth brush

blade included.

👁 🛈 SRM-225U **U-HANDLE BRUSHCUTTER**

The SRM-225U brushcutter combines lightweight maneuverability and comfort with reliability. Ergonomic features like a quick-loading Speed-Feed® 400 trimmer head ensure the hard work is never harder than it should be.

- i-30[™] starter reduces starting effort by 30%
- Ergonomic cushioned front and rear handles
- Offset U-handle with stop switch and throttle lock out
- Includes shoulder harness and 8 in. 8-tooth brush blade

Engine (cc) 21.2 Weight (lbs.) 13.6 (6.2 kg) Shaft Length (in.) 59 Fuel Capacity (fl. oz.) 12.8 (378 ml) Cutting Head Speed-Feed[®] 400 Cutting Swath (in.) 17

BRUSHCUTTERS

Power, comfort and stability is what you can expect from ECHO's brushcutters. Easy-to-use custom ergonomic controls, lightweight design, and powerful professional-grade, 2-stroke engine technologies give you the tools to enhance your productivity. Ergonomic U-handles provide improved control to tackle all clearing applications including rough grass, thickets, shrubs and dense undergrowth.





Featuring a quick-loading Speed-Feed® 400 trimmer head and a U-style handle with an integrated throttle lever, it minimizes fatigue and downtime.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Offset U-handle with stop switch and throttle lock out
- Equipped for blade use (blade sold separately)

Engine (cc)	25.4
Weight (Ibs.)	13.6 (6.2 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	20.6 (609 ml)
Cutting Head	Speed-Feed* 400
Cutting Swath (in.)	17

U-HANDLE BRUSHGUTTER

The unmatched blend of torque and power of the SRM-3020U elevates productivity to a new level. A Speed-Feed® 500 head and a U-style handle with integrated throttle cuts a hard day's work down to size.

- 1.62:1 gear reduction for fast, efficient cutting
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- U-style handle with integrated throttle lever and tool-less adjustment
- Equipped for blade use (blade sold separately)

Engine (cc)	30.5
Weight (Ibs.)	14.8 (6.7 kg)
Shaft Length (in.)	59
Fuel Capacity (fl. oz.)	24 (710 ml)
Cutting Head	Speed-Feed [®] 500
Cutting Swath (in.)	20

U-HANDLE BRUSHGUTTER

The SRM-410U brushcutter powers through the toughest overgrown messes with complete confidence. Smart designs and user-friendly features harness its mighty power to ensure the only thing taking a punishment is the brush.

- 10 in., 80-tooth brush blade handles any sort of brush
- Large, 33.8 fl. oz. capacity fuel tank for long run times
- Metal shield

Engine (cc)	42.7
Weight (Ibs.)	19.1 (8.7 kg)
Shaft Length (in.)	60.2
Fuel Capacity (fl. oz.)	33.8 (1 L)
Cutting Head	10 in. Blade
Cutting Swath (in.)	10

BRUSHCUTTER ACCESSORIES

Blade ProtectorsPart#: P021016360 (8 in. diameter) Part#: P021007470 (10 in. diameter)

Offset U-Handle Kits See chart for part number.





Blade Conversion Kit See chart for part number.



Model	U-Handle Kit	Blade Conversion Kit (20 mm Arbor)			
		No Blade	Includes 8 in 8-Tooth Blade		
SRM-225/i/2320T	99944200435	99944200418	99944200422		
SRM-266	99944200675	99944200418	99944200422		
SRM-2620/T*	-	99944200418	99944200422		
SRM-3020/T*	-	99944200418	-		

* 2620 series requires an 8 in. 20 mm blade when using 99944200418 ** 3020 series requires a 10 in. 20 mm blade when using 99944200418



Our easy-to-use and innovative Speed-Feed® trimmer heads take the hassle out of refilling your trimmer head.

- No disassembly required
- Reload your trimmer line in 30 seconds or less
- Rugged head for medium and heavy-duty applications
- Smooth bottom enables the head to glide along the ground for an even cut





Scan this QR code to see how to load trimmer line in your Speed-Feed* trimmer head.



Speed-Feed[®] 400 Trimmer Head

Part #: 99944200907 - Universal fit for ECHO curved shaft and straight shaft trimmers as well as select competitor models.

Part #: 99944200907B - Fits ECHO straight shaft trimmers, Bulk package of 24

Part #: 99944200908 - Fits ECHO curved shaft trimmers.



Speed-Feed® 500 Trimmer Head

Part #: 99944200950 - Universal fit for ECHO curved shaft and straight shaft trimmers as well as select competitor models.

Part #: 99944200950B - Fits ECHO straight shaft trimmers, Bulk package of 24

Unique shape of this Speed-Feed[®] trimmer head is a trademark of ECHO Inc.

	ECHOmatic [®] Heads		
	Proven economical bum	o head design grea	t for mowing and trimming.
	ECHOmatic [®] (universal) Bulk package of 24	21560070 21560070B	
	ECHOmatic [®] Pro Bulk package of 8	21560031 21560031B	
2	Rapid Loader [®] Heads		
		er jobs with minima o reload with pre-c	
	2-Line (universal) Bulk package of 24	21560056 21560056B	0
	2-Line (universal)	21560062	
	3-Line (50% more cut- ting ability)	99944200221	
	High-Capacity Manual	Head	
		tyle head designed a large line holding o	
	Universal Bulk package of 24	21560065 21560065B	
	Heavy-Duty Fixed Line	Heads	

Durable aluminum head that is designed for tough cutting environments and areas that are abrasive.



Maxi-Cut[®] Heads

For use where traditional trimmer line is not effective.



Black Diamond[®]: Twisted, Square Edges

		-	• •					
	Large Clam		Large Clam Medium Spool			Large Spool		
Line dia. (in.)	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #		
.095	253	330095071	885	330095073	1,394	330095075		
.105	217	330105071	708	330105073	1,132	330105075		

Cross-Fire[®]: Multi-Sided

Line	Mini Clam Small Clam		Large Clam		Medi	Medium Spool		Large Spool		
dia. (in.)	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.065	40	102152652	305	306065051	-	-	-	-	-	-
.080	40	102152802	201	306080052	350	311080070	1,206	314080052	2,010	316080052
.095	40	102152952	141	306095053	250	311095070	846	314095053	1,410	316095053
.105	-	-	117	306105055	234	311105065	702	314105055	1,170	316105055
.130	-	-	-	-	150	311130064	450	314130054	750	316130054
.155	-	-	-	-	126	311155066	378	314155056	630	316155056



50 Count

Part #

-

3272-095

3272-105

3272-130

Pre-Cut Cross-Fire[®] Line

Length (in.)

-

8

8

8

for Rapid Loader®

Line dia. (in.)

.080

.095

.105

.130

IVLON IRIMMA UNE 50

Silentwist[®]: Twisted, Curved Edges

Line	Mir	ni Clam	Small Clam		Small Clam Large Clam		Medium Spool		Large Spool	
dia. (in.)	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.080	40	320080060	160	321080060	320	322080060	-	-	-	-
.095	40	320095060	115	321095060	230	322095060	685	323095060	-	-
.105	40	320105060	90	321105060	185	322105060	550	323105060	920	324105060

Rou	und Li	ine				
Line	Mir	ni Clam	Larg	ge Clam	Medi	um Spool
dia. (in.)	Length (ft.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.080	40	102142802	402	310080062	-	-
.095	-	-	-	-	-	-
.105	-	-	-	-	-	-
.130	-	-	-	-	450	313130054

LIGHT GRASS/WEEDS SMALL RESIDENTIAL AREAS .065 in. - .080 in. LINE MEDIUM GRASS/WEEDS LARGER RESIDENTIAL AREAS OR LIGHT COMMERCIAL AREAS .095 in. - .105 in. LINE

HEAVY GRASS/WEEDS INDUSTRIAL LANDSCAPING, COMMERCIAL LANDSCAPING .130 in. + LINE



TRIMMER/BRUSHCUTTER HEADS

Model	ECHOmatic [®]	ECHOmatic [*] Pro [™]	Heavy-Duty Fixed	Heavy- Duty Fixed (High Torque)	Speed-Feed [®] 400	Speed-Feed 500	High- Capacity Manual	2-Line Rapid Loader®	3-Line Rapid Loader®	Maxi-Cut*	Pro Maxi-Cut®
Part #	21560070	21560031	99944200220	99944200225	99944200907 99944200908	99944200950	21560065	21560056 21560062	99944200221	215311	215511
Trimmers											
Std. Line Diameter	.095 in.	.095 in.	.130 in.	.130 in.	.095 in. (.080 in. GT)	.095 in.	.095 in.	.095 in.	.095 in.	-	-
Std. Line Accepted	20 ft.	25 ft.	16 in. Strips	16 in. Strips	20 ft. (30 ft. GT)	40 ft.	40 ft.	8 in. Strips	8 in. Strips	-	-
Min. Line Diameter	.080 in.	.080 in.	.130 in.	.130 in.	.080 in.	.080 in.	.080 in.	.080 in.	.095 in.	-	-
Max. Line Diameter	.105 in.	.130 in.	.130 in.	.130 in.	.105 in. (.095 in. GT)	.130 in.	.130 in.	.155 in. (.130 in.)	.155 in.	-	-
Pre-Loaded Line	Cross-Fire [®]	Cross-Fire*	Round	Round	Cross-Fire*	Black Diamond®	Cross-Fire*	Cross-Fire*	Cross-Fire*	Maxi-Cut® Blades	Maxi-Cut® Blades
DSRM-2100 56V**					•						
DSRM-2600 56V**					•						
GT-225					•			•		•	
GT-225i					•			•		•	
GT-225SF					•			•		•	
GT-225L					•			•		•	
SRM-225	•	•	•		•			•			•
SRM-225i	•	•	•		•			•			•
SRM-2320T	•	•		•	•			•	•		•
SRM-266	•	•	•		•	•	•	•	•		•
SRM-2620	•	•	•		•	•	•	•	•		•
SRM-2620T	•	•		•	•	•	•	•	•		•
SRM-3020	•	•	•		•	•	•	•	•		•
SRM-3020T	•	•		•	•	•	•	•	•		•
SRM-410X			•			•	•				
BRUSHCUTT	ERS										
DSRM-2600U 56V**					•						
SRM-225U*			•		•			•		•	
SRM-2620U	•	•	•		•	•	•	•	•		•
SRM-3020U	•	•	•		•	•	•	•	•		•



Standard • 32 Optional •

*Also includes 8 in. 8-tooth brush blade **Comes pre-loaded with .095 in. Silentwist®

BLADES AND CONVERSION KITS

A variety of brush and dense grass blades are available for all ECHO straight shaft (SRM series) trimers and brushcutters. A blade conversion kit is required if not supplied with your original trimmer. Refer to your operator's manual for the appropriate safety harnesses, handles, shields, etc. when installing optional blades or accessories.

Model	10 in. 3 Grass and V		8 in. 8 Grass and V	-Tooth Veed Blade	8 in. 22 Brush E	 8 in. 80 Brush	10 in. 80-Tooth Brush Blade	
Model	20 mm Arbor 99944200047	25 mm Arbor 99944200048						

TRIMMERS: (*U-HANDLE KIT OR BARRIER BAR IS REQUIRED FOR ALL METAL BLADES)

SRM-225/i	•		•		•		•		
PAS-225 with 99944200601		•		•		•		•	•
SRM-2320T	•		•		•		•		
SRM-2620/T*	•		•		•		•		
PAS-2620 with 99944200601		•		•		•		•	•
SRM-266	•		•		•		•		
SRM-3020/T*	•								
SRM-410X		•							•
DSRM-2600*	•		•		•		•		
DPAS-2100 with 99944200601				•		•		•	•
DPAS-2600 with 999944200601		•		•		•		•	•

FOR BRUSHCUTTERS:

SRM-225U	•		•		•		•		
SRM-2620U		•		•		•		•	•
SRM-3020U		•							•
SRM-410U		•							•
DSRM-2600U		•		•		•		•	•

Standard • Optional • *Please note if using a blade conversion kit, you MUST use a 20mm blade. All blade conversion kits have 20mm arbors. 8 in. blades are not to be used with SRM-3020/T/U and SRM-410X/U. Blade conversion kit is required for metal blades.

APPLICATION GUIDE:

Small Weeds	•	•			
Large Weeds	•	•	•	•	٠
Reeds, Bushes, Heavy Grass	•	•	•	•	•
Bushes, Small Trees			•	•	•

TRIMMERS

	GT-225	GT-225i	GT-225SF	GT-225L	SRM-225	SRM-225i	SRM-2320T	SRM-266	SRM-2620	SRM-2620T	SRM-3020	SRM-3020T	SRM-410X
Features and Benefits													
Commercial-grade felt air filtration for long engine life	•	•	•	•	•	•							
Single-stage pleated air filtration for long engine life													•
2-stage commercial-grade pleated air filtration for long engine life									•	•	•	•	
2-stage commercial-grade air filtration for long engine life							•	•					
i-30" starting system for 30% starting/pulling effort reduction	•		•	•	•		•	•					
i-75 [™] starting system for 75% starting/pulling effort reduction		•				•							
Digital ignition system provides Intelligent electronic programing for precise ignition timing at all operating speeds	•	•	•	•	•	•	•	•	•	•	•	•	•
Purge bulb for easy starting	•	•	•	•	•	•	•	•	•	•	•	•	•
Ergonomic rubber grip throttle handle with overmolding for comfort and durability				•	•	•	•	•	•	•	•	•	
Debris shield with integrated cut-off knife for optimal line length	•	•	•	•	•	•	•	•	•	•	•	•	
2-in-1 shield with integrated cut-off knife													•
Engine vibration-reduction system for operator comfort				•	•	•							
Heavy-duty vibration-reduction system for operator comfort							•	•	•	•	•	•	•
Speed-Feed* 400 cutting head for easy reloading			•	•	•	•	•	•	•	•			
High-capacity Speed-Feed* 500 cutting head for more line											•	•	•
Powerhead components made from high-grade magnesium for increased durability with less weight									•	•	•	•	
Dual piston ring design for long engine life									•	•	•	•	
2:1 Pro Torque [™] gear case ratio for superior power/cutting							•			•		•	
Harness, barrier bar, & blade-mount hardware included													•

BRUSHCUTTERS

SRM-410	
SRM	Features and Benefits
	Commercial-grade felt air filtration for long engine life
	Pleated air filtration for long engine life
•	2-stage commercial-grade pleated air filtration for long engine life
	i-30 [™] starting system for 30% starting/pulling effort reduction
	Digital ignition system provides Intelligent electronic programing for precise ignition timing at all operating speeds
	Purge bulb for easy starting
•	Ergonomic rubber grip U-handle with overmolding for increased comfort and durability
•	Debris shield with integrated cut-off knife for optimal line length
	Engine vibration-reduction system for operator comfort
•	Heavy-duty vibration-reduction system for operator comfort
	Shoulder harness included for comfort and convenience
•	Additional shield and hardware included for blade use
	Speed-Feed [®] 400 cutting head for easy reloading
•	High-capacity Speed-Feed* 500 cutting head for more line
	Powerhead components made from high-grade magnesium for increased durability with less weight

Dual piston ring design for long engine life

Tool-less U handle adjustment knob for ease of storage

TRIMMER SPECIFICATIONS

Model	Engine Disp. (cc)	Carburetor (w/Purge Pump)	Fuel Capacity (fl. oz.)	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Shield & Cutting Swath (in.)	Drive Shaft	Gear Ratio	Nylon Line (in. dia.)	Dry Weight (lbs.)*	Dry Weight (Ibs.)**
GT-225	21.2	Rotary	12.8	48	Curved	i-30™	Rapid Loader [®]	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire*	10.1	9.5
GT-225i	21.2	Rotary	12.8	48	Curved	i-75™	Rapid Loader	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire®	10.6	10.0
GT-22551	= 21.2	Rotary	12.8	48	Curved	i-30™	Speed-Feed® 400	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire*	10.8	9.5
GT-225L	21.2	Rotary	12.8	55	Curved	i-30™	Speed-Feed [®] 400	GT with 16 in. Swath	4-Layer Cable	-	.095 Cross-Fire*	11.2	10.2
SRM-225	21.2	Rotary	12.8	59	Straight	i-30™	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Cross-Fire*	11.5	11.2
SRM-225	i 21.2	Rotary	12.8	59	Straight	i-75"	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Cross-Fire*	12	11.7
SRM-232	OT 21.2	Rotary	12.8	59	Straight	Standard	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	2:1	.095 Black Diamond	12.2	11.6
SRM-266	25.4	Rotary	16.9	59	Straight	i-30™	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	1.4:1	.095 Black Diamond	13.4	12.3
SRM-262	0 25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	1.62:1	.095 Black Diamond	12.6	11.7
SRM-262	OT 25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed [®] 400	SRM with 17 in. Swath	4-Layer Cable	2:1	.095 Black Diamond	12.8	11.9
SRM-302	0 30.5	Rotary	24	59	Straight	Standard	Speed-Feed [®] 500	SRM with 20 in. Swath	4-Layer Cable	1.62:1	.095 Black Diamond	13.7	12.1
SRM-302	OT 30.5	Rotary	24	59	Straight	Standard	Speed-Feed 500	SRM with 20 in. Swath	4-Layer Cable	2:1	.095 Black Diamond	13.9	12.3
SRM-410	X 42.7	Rotary	32.1	60.2	Straight	Standard	Speed-Feed [®] 500	SRM with 20 in. Swath	Steel	1.33:1	.095 Black Diamond	18.4	16.3

*with cutting head and shield **without cutting head or shield

BRUSHCUTTER SPECIFICATIONS

Model	Engine Disp. (cc)	Carburetor (w/Purge Pump)	Fuel Capacity (fl. oz.)	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Shield & Cutting Swath (in.)	Drive Shaft	Arbor Size (mm)	Nylon Line (in. dia.)	Dry Weight (lbs.)*	Dry Weight (Ibs.)**
SRM-225U	21.2	Rotary	12.8	59	Straight	i-30™	Speed-Feed [®] 400	SRM 17 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Cross-Fire®	13.6	12.7
SRM-2620U	25.4	Rotary	20.6	59	Straight	Standard	Speed-Feed [®] 400	SRM 17 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Black Diamond®	13.6	12.4
SRM-3020U	30.5	Rotary	24	59	Straight	Standard	Speed-Feed [®] 500	SRM 20 in. Swath w/ Blade Shield	4-Layer Cable	25	.095 Black Diamond*	14.8	13.2
SRM-410U	42.7	Rotary	32.1	60.2	Straight	Standard	10 in. Brush Blade	Metal Blade Shield	Steel	25	-	19.1	18.3

*with cutting head and shield **without cutting head or shield



SRM-2620U

•

.

SRM-225U

•

.

.

•

SRM-3020U

•

•

.

SRM-410U



ECHO edgers deliver superior power and durability in a lightweight, easy-to-maneuver design so you can create that perfect, manicured look on every property. For the commercial user, ECHO X Series edgers feature a Pro-Torque[™] gear case that provides 20% more torque than traditional equipment and a clogresistant shield to keep material from piling up and slowing down the blade, helping to maximize your productivity.

The PE-2620 curved-shaft edger combines power and torque with lightweight construction.

■ ● PE-2620

CURVED SHAFT EDGER

- 2:1 gear reduction to power through tough overgrown grass
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Contoured, aluminum debris shield with a cut-away, open-face to reduce clogging
- Easy height-adjustment wheel with captive hardware

Engine (cc)	25.4
Weight (Ibs.)	14.1 (6.4 kg)
Blade Length (in.)	7.75
Fuel Capacity (fl. oz.)	20.6 (609 ml)

EDGERS

PE-2620

Features and Benefits	
Commercial-grade felt air filtration for long engine life	
2-stage commercial-grade pleated air filtration for long engine life	•
i-30 [™] starting system for 30% starting effort reduction	
Digital ignition system provides Intelligent electronic programming for precise ignition timing at all operating speeds	•
Purge bulb for easy starting	•
Chrome cylinder plating increases engine life	•
Ergonomic rubber grip throttle handle with overmolding for comfort and durability	•
2:1 Pro Torque [™] gear case ratio for superior power/cutting	•
Metal skid plate for reduced wear to debris shield	•
Extra wide skid plate for added gear case protection	•
Durable, molded shield for reduced material kickback	
Clog-resistant, open-face metal shield for reduced clogging	•
Sight line on shield for straighter cuts	•
Heavy-duty adjustable guide wheel with solid rubber tread	•
Powerhead components made from high-grade magnesium for increased durability with less weight	•
Dual piston ring design for long engine life	•
Engine vibration-reduction system for operator comfort	
Heavy-duty vibration-reduction system for operator comfort	•

SPECIFICATIONS

Model	Engine Disp. (cc)	Fuel Cap. (fl. oz.)	Starting System	Debris Shield	Blade Length (in.)	Blade Thickness (in.)	Dry Weight (lbs.)
PE-2620	25.4	20.6	Standard	Die-Cast Metal	7.75	0.090	14.1

EDGER ACCESSORIES



Standard .090 in. thickness, 7.75 in. in length. **Part#:** 69601552632 - Package of 2 **Part#:** 99944201000 - Bulk pack of 50



Twice as thick .181 in., 7.75 in. in length. **Part#:** 69601553630 - Package of 2 **Part#:** 99944205000 - Bulk pack of 25



Crack Chaser Wire Wheel



Clears debris from driveways, cracks, sidewalks or paved bricks. 6.875 in. diameter, 25 mm arbor. Part#: 99944206000



Engine (cc)

Weight (lbs.)

Fuel Capacity (fl. oz)

Noise Level (db(A))*

*Per ansi B175.2-2012

Max Air Speed At Nozzle (mph)

Blowing Force (N) At Nozzle

Air Volume At Nozzle (CFM)

25.4

15.8

453

70

8.6 (3.9 kg) 18.6 (550 ml)

170 (274 km/h)

BLOWERS

ECHO's industry-leading line of blowers includes both handheld and backpack models, all equipped with professional features to give you maximum productivity and ultimate power. Standard features include comfortable handles with "cruise control", and backpack models feature padded backrests and shoulder straps, Posi-loc[™] tubes for secure pipe connections, and advanced ignitions for quick and easy starts. All of ECHO's backpack blowers (except the PB-265LN and DPB-5800T) are available with either tube-mounted or hip-mounted throttles.

25.4 cc professional-grade 2-stroke engine Tool-less access air filtration system Secondary handle

PB-255LN HANDHELD BLOWER

The handheld, low-noise PB-255LN emits only 65 decibels* while still delivering a blowing force of 354 CFM at 191 MPH (307 km/h).

- Low-noise output for use in sensitive environments
- Flared end pipe increases air speed
- Parallel handles aid in directional operation
- Includes round and flared tubes

Engine (cc)	25.4
Weight (lbs.)	10.2 (4.6 kg)
Fuel Capacity (fl. oz)	16.9 (600 ml)
Max Air Speed At Nozzle (mph)	160 ¹ /191 ² (258 ¹ /307 ² km/h)
Blowing Force (N) At Nozzle	13
Air Volume At Nozzle (CFM)	354 ¹ /345 ²
Noise Level (db(A))*	65

*Per ansi B175.2-2012 ¹With round tube ² With flared tube

PB-2620 III CONTRACTOR

The PB-2620 handheld blower comfortably powers through leaves and debris for easy all-season cleanup. Built for professionals on the move, it also features a cruise-control throttle and a secondary handle for added comfort and maneuverability.

- Best-in-class handheld blower with professional features
- Double-grid intake design reduces clogging
- Includes both round and flared pipes for a variety of applications

Engine (cc)	25.4
Weight (lbs.)	9.8 (4.4 kg)
Fuel Capacity (fl. oz)	20.3 (600 ml)
Max Air Speed At Nozzle (mph)	172 (275 km/h) ¹
Blowing Force (N) At Nozzle	15.8 ¹
Air Volume At Nozzle (CFM)	456 ¹
Noise Level (db(A))*	70

*Per ansi B175.2-2012 1With round tube



When it's time for a fast, reliable cleanup, the ES-250 Shred N Vac® delivers the power and flexibility needed get the job done. It starts easily and quickly converts from a blower to a vacuum/shredder, saving homeowners time, space and effort.

• Three tools in one: easily converts from blower to vacuum/shredder

- Patented 4-blade shredding mechanism reduces debris by a ratio of 12:1
- 2-bushel collection bag with rear zipper for convenient
 emptying

Engine (cc)	25.4
Weight (lbs.)	12.6 (5.7 kg)
Fuel Capacity (fl. oz)	16.9 (500 ml)
Max Air Speed At Nozzle (mph)	165 (266 km/h)
Blowing Force (N) At Nozzle	12.5
Air Volume At Nozzle (CFM)	392
Noise Level (db(A))*	70
*Per ansi B175.2-2012	



Blower and Shred 'N' Vac® Rain Gutter Kit

Provides up to 15 ft. of reach with 7 ft. of extension tubes. Fits PB-2520, PB-255LN, PB-2620, ES-250 PB-265LN, PB-580, and PB-755S. Part#: 99944100026 Posi-loc™





O PB-265LN BACKPACK BLOWER

The lightweight, low-noise PB-265LN backpack blower produces a 65-decibel* whisper but still pushes 375 CFM at 158 MPH (254 km/h), allowing users to abide by noise regulations while blowing through long to-do lists.

- Great performance from a lightweight backpack blower
- Low noise output for noise-sensitive environments
- Variable speed throttle with cruise control for operator convenience
- Hip-mounted throttle

Engine (cc)	25.4
Weight (lbs.)	13.3 (6.0 kg)
Fuel Capacity (fl. oz)	22.3 (660 ml)
Max Air Speed At Nozzle (mph)	158 (254 km/h)
Blowing Force (N) At Nozzle	11
Air Volume At Nozzle (CFM)	375
Noise Level (db(A))*	65
*Per ansi B175.2-2012	

BACKPACK BLOWER

The PB-580 backpack blower is designed for the oversized demands of professionals. From light mowing cleanups to wet, heavy leaves, it provides all-day productivity and all-day comfort.

- Available with hip- (PB-580H) or tube-(PB-580T) mounted throttle with cruise control
- Powerful and cost-effective
- Comfortable backrest and shoulder pads

Engine (cc)	58.2
Weight (lbs.)	22.9/22.7 (10.4/10.3 kg)
Fuel Capacity (fl. oz)	62 (1.8 L)
Max Air Speed At Nozzle (mph)	216 (348 km/h)
Blowing Force (N) At Nozzle	22
Air Volume At Nozzle (CFM)	517
Noise Level (db(A))*	70
*Per ansi B175.2-2012	



ECHO's easiest-starting backpack blower yet, the PB-5810 offers impressive power for both homeowner and light commercial use.

- Available with hip- (PB-5810H) or tube- (PB-5810T) mounted throttle with cruise control
- Padded backrest and shoulder straps for user comfort
- Exclusive vented backrest pad provides air circulation around the user for comfort in hot weather
- 44% reduced starting effort compared to its predecessor (the PB-580)
- Pleated, automotive-style air filter for superior filtration

Engine (cc)	59.7
Weight (lbs.)	20.9 (9.5 kg)
Fuel Capacity (fl. oz)	43.2 (1.3 L)
Max Air Speed At Nozzle (mph)	200 (322 km/h)
Blowing Force (N) At Nozzle	27
Air Volume At Nozzle (CFM)	700
Noise Level (db(A))*	75
*Per ansi B175.2-2012	

Curved Tube

Angled design allows increased control

when directing air flow. Fits PB-760LN, PB-770 Part#: E165000730



Blower Strap Fits PB-2520, PB-2620, DPB-2500 Part#: 99944100030





The PB-755S backpack blower pushes 651 CFM at 233 MPH (375 km/h). With easy maintenance and ergonomic designs for all-day comfort, it makes the toughest cleanups a breeze.

- Available with hip- (PB-755SH) or tube- (PB-755ST) mounted throttle with cruise control
- Professional design built for durability and ease of maintenance
- Pleated, automotive-style air filter for superior filtration

Engine (cc)	63.3
Weight (lbs.)	24.7 (11.2 kg)
Fuel Capacity (fl. oz)	62 (1.8 L)
Max Air Speed At Nozzle (mph)	233 (375 km/h)
Blowing Force (N) At Nozzle	28
Air Volume At Nozzle (CFM)	651
Noise Level (db(A))*	74
*Per ansi B175.2-2012	

BACKPACK BLOWER

The industry's best combination of air speed and air volume. The PB-770 backpack blower moves an astounding 756 CFM at 234 MPH (377 km/h).

- Available with hip- (PB-770H) or tube- (PB-770T) mounted throttle with cruise control
- Side-mounted, heavy-duty, dual-stage air filtration system for longer engine life
- Padded shoulder straps and backrest
- Exclusive vented back pad provides cooling air that circulates around the user for comfort in hot weather

Engine (cc)	63.3
Weight (lbs.)	24.5/24.3 (11.1/ 11.0 kg)
Fuel Capacity (fl. oz)	68.3 (2L)
Max Air Speed At Nozzle (mph)	234 (377 km/h)
Blowing Force (N) At Nozzle	33
Air Volume At Nozzle (CFM)	756
Noise Level (db(A))*	74
*Per ansi B175.2-2012	



The PB-7910 commercial-grade, high-performance backpack blower provides 835 CFM and 240 MPH (386 km/h) blowing performance making it the most powerful blower on the market at its price point.

- Available with hip- (PB-7910H) or tube- (PB-7910T) mounted throttle with cruise control
- Padded shoulder straps and backrest
- Exclusive vented back pad provides cooling air that circulates around the user for comfort in hot weather
- Side-mounted, heavy-duty, dual-stage air filtration system for longer engine life

Engine (cc)	63.3
Weight (lbs.)	24.5/24.3 (11.1/ 11.0 kg)
Fuel Capacity (fl. oz)	68.3 (2L)
Max Air Speed At Nozzle (mph)	234 (377 km/h)
Blowing Force (N) At Nozzle	33
Air Volume At Nozzle (CFM)	756
Noise Level (db(A))*	74
*Per ansi B175.2-2012	

PB-9010 BACKPACK BLOWER

The world's most powerful backpack blower. The PB-9010 backpack blower is a professional-grade windstorm built to power through the toughest workdays with ease.

- Available with hip- (PB-9010H) or tube- (PB-9010T) mounted throttle with cruise control
- High performance 2-stroke engine provides durable and reliable power
- 2-stage air filter extends engine life
- Patented tube wear ring

Engine (cc)	79.9
Weight (lbs.)	27.5/27.2 (12.5/12.3 kg)
Fuel Capacity (fl. oz)	83.8 (2.5 L)
Max Air Speed At Nozzle (mph)	220 (354 km/h)
Blowing Force (N) At Nozzle	48
Air Volume At Nozzle (CFM)	1,110
Noise Level (db(A))*	80
*Per ansi B175.2-2012	

- 1 79.9 cc professional-grade 2-stroke engine
- 2 Tool-less access air filtration system
- 3 Large capacity fuel tank
- 4 Patented wear ring
- 5 Posi-loc™ pipes

						and the seal		40	-	
Model	Blower Type	Engine Disp. (cc)	Carb. (Purge Pump)	Starting System		Air Volume* (CFM-pipe)	Maximum Air Speed* (MPH-pipe)	Newtons (N)	Noise Level dB(A)	Dry Weight** (Ibs.)
PB-2520	Handheld	25.4	Yes	Standard	18.6	453	170	15.8	70	8.6
PB-255LN	Handheld	25.4	Yes	Standard	16.9	354	191	13	64	10.2
PB-2620	Handheld	25.4	Yes	Standard	20.3	456	172	15.8	70	9.8
PB-265LN	Backpack	25.4	Yes	i-30™	22.3	375	158	11	65	13.3
PB-580H/T	Backpack	58.2	Yes	Standard	62.0	517	216	22	70	22.9/22.7
PB-755SH/T	Backpack	63.3	Yes	Standard	62.0	651	233	28	74	24.7
PB-770H/T	Backpack	63.3	Yes	Standard	68.3	756	234	33	74	24.5/24.3
PB-9010H/T	Backpack	79.9	Yes	Standard	83.8	1,110	220	48	80	26.4/26.7
ES-250	Shred 'N' Vac®	25.4	Yes	Standard	16.9	392	165	12.5	70	12.6
				Carlo and State	1918 314-255	100 100 100 100 100 100 100 100 100 100		37 37 35 50		

SPECIFICATIONS

*per ANSI B175.2-2012 **with blower pipe



BLOWERS	PB-2520	PB-255LN	PB-2620	PB-265LN	PB-580H	PB-580T	PB-755SH	PB-755ST	PB-770H	PB-770T	PB-9010H	PB-9010T	ES-250
Features and Benefits													
Posi-loc [™] pipes for a secure connection	•	•	•	•	•	•	•	•	•	•	•	•	•
i-30" starting system for 30% starting/ pulling effort reduction				•									
Low-noise, 65 dB(A), output for noise-sensitive environments		•		•									
Pleated, automotive-style air filter for superior filtration			•		•	•	•	•	•	•	•	•	
Hip-mounted throttle with cruise control				•	•		•		•		•		
Tube-mounted throttle with cruise control						•		•		•		•	
Extra-flexible tube for cold weather operation				•	•	•	•	•	•	•	•	•	
Wide angled thick-walled premium blower pipe for optimum quality and mobility				•	•	•	•	•	•	•	•	•	
Rotational control for reduced operator fatigue	•												•
Ergonomic rubber top handle grip with overmolding for comfort, control, and durability		•	•										
Secondary handles for all-position operation		•	•										•
Flared-end pipe for increase airspeed to move heavy/wet debris		•	•										
Throttle with cruise control for operator convenience	•	•	•	•	•	•	•	•	•	•	•	•	•
Patented, 4-blade shredding mechanism for optimum debris reduction													•
2-bushel collection bag with rear zipper for convenient emptying													•

1 25 cc professional-grade 2-stroke engine



MECHD

2 Dual-post chain brake

- G-Force Engine Air Pre-Cleaner™
- Automatic clutch-driven oiler



CS-2511T/CS-2511TN © © TOP HANDLE CHAINSAW

The top-handle CS-2511T is in a class of its own as the lightest gas-powered chainsaw in North America. The CS-2511TN uses the 80TXL cutting system for reduced vibration and superior cutting performance for professional arborists.


- Choke with automatic fast idle for easy starting
- Clutch-driven adjustable oiler
- Fine grid starter cover prevents debris ingestion for longer life and less maintenance
- TN models have reduced vibration and more efficient cutting

Engine (cc)	25	
Weight (lbs.)	5.2 (2.4 kg)	
Bar Length (in.)	12, 14	
Fuel Capacity (fl. oz)	6.4 (189 ml)	
Oil Capacity (fl. oz)	4.7 (139 ml)	

CHAINSAWS

IIIEEHD

A trusted choice of tree care professionals around the world for decades, ECHO's top- and rear-handle chainsaws can tackle the toughest jobs out there with superior power and smooth operation. Get the performance and durability you need from the professional-grade, 2-stroke engine and enjoy fast, reliable starting with our advanced ignition system. All ECHO chainsaws come standard with the best commercial features such as vibration reduction systems, automatic oilers, inertia chain brakes and more.

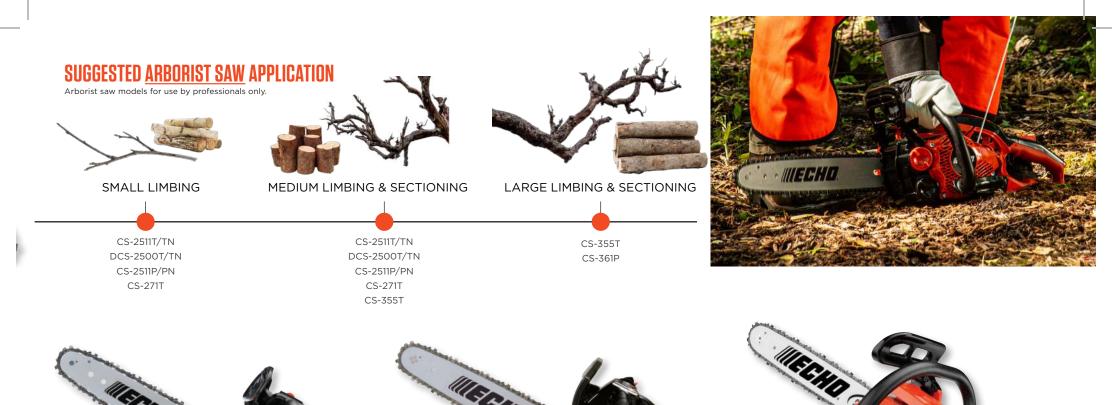

CS-271T 🗠 😡 **TOP HANDLE CHAINSAW**

The CS-271T surprises with incredible torgue and instant throttle response, helping make light work of long days spent pruning and trimming branches.

- i-30[™] starter reduces starting effort by 30%
- G-Force Engine Air Pre-Cleaner[™] for reduced air filter maintenance
- Side-access chain tensioner for easy chain adjustments
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	26.9	
Weight (lbs.)	6.6 (3.0 kg)	
Bar Length (in.)	12	
Fuel Capacity (fl. oz)	8.1 (240 ml)	
Oil Capacity (fl. oz)	5.4 (160 ml)	

CS-355T ⊚ € **TOP HANDLE CHAINSAV**

MECK

The CS-355T is ECHO's most powerful top handle chainsaw combining professional-grade power with ergonomic, user-friendly features. It delivers all-day productivity without all-day exhaustion.

- ECHO's highest-power top-handle chainsaw
- Heavy-duty air filter provides superior air filtration
- Integrated choke and fast idle with trigger release for fast starts
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	35.8	
Weight (lbs.)	8 (3.6 kg)	
Bar Length (in.)	14, 16	
Fuel Capacity (fl. oz)	11.2 (331 ml)	
Oil Capacity (fl. oz)	8.2 (243 ml)	

CS-361P 💿 😡 **REAR HANDLE CHAINSAW**

Top handle performance in a rear handle design, the CS-361P features excellent power-to-weight ratio and is loaded with user-friendly innovations. It's the easy choice for arborists facing oversized workdays.

- Compact rear-handle chainsaw for professional arborists
- Tool-less, easy-access air filter
- Integrated choke and fast idle with trigger release for fast starts
- Purge bulb provides fresh fuel to carburetor for fast starts

Engine (cc)	35.8
Weight (lbs.)	8.4 (3.6 kg)
Bar Length (in.)	14, 16
Fuel Capacity (fl. oz)	10.8 (319 ml)
Oil Capacity (fl. oz)	7.8 (231 ml)

1 25 cc professional-grade, 2-stroke engine



2 Dual-post chain brake

G-Force Engine Air Pre-Cleaner[™]

IIIEEM



CS-2511P/CS-2511PN © ©

The world's lightest rear-handle chainsaw features the industry's best power-to-weight ratio, ensuring a long day of work isn't more exhausting than it needs to be. The CS-2511PN uses the 80TXL cutting system for reduced vibration and superior cutting performance.

- Spring-assist starter
- Fine grid starter cover prevents debris ingestion for longer life and less maintenance
- Two-piece mesh air filter for easy cleaning
- TN models have reduced vibration and more efficient cutting

Engine (cc)	25	
Weight (lbs.)	5.7 (2.6 kg)	
Bar Length (in.)	12, 14	
Fuel Capacity (fl. oz)	6.4 (189 ml)	
Oil Capacity (fl. oz)	4.7 (139 ml)	





The ECHO CS-3410 features a 34.4 cc professional-grade, 2-stroke engine for lower emissions. Ideal for limbing and cutting firewood, the CS-3410 is the perfect choice for

• i-30[™] starter reduces starting effort by 30%

homeowners.

- Side-access chain tensioner for quick chain adjustments
- Momentary stop switch automatically returns to "ON" position
- Translucent fuel tank for quick fuel level checks

Engine (cc)	34.4
Weight (lbs.)	8.2 (3.7 kg)
Bar Length (in.)	14, 16
Fuel Capacity (fl. oz)	9.5 (281 ml)
Oil Capacity (fl. oz)	7.8 (231 ml)

CS-3510 @ @ @ REAR HANDLE CHAINSAW

The lightest chainsaw in its class, ideal for storm clean up and mid size tree felling, it powers through with reliability and productivity.

- i-30[™] starter reduces starting effort by 30%
- Multiple-stage air filtration system cleans air and reduces air filter maintenance
- Momentary stop switch automatically returns to "ON" position
- Translucent fuel tank for quick fuel level checks

Engine (cc)	34.4	
Weight (lbs.)	8.2 (3.7 kg)	
Bar Length (in.)	16	
Fuel Capacity (fl. oz)	9.5 (281 ml)	
Oil Capacity (fl. oz)	7.8 (231 ml)	



ECHIA

With a host of user-friendly features, the popular 34 cc CS-352 is the hardest worker on any property.

- i-30[™] starter reduces starting effort by 30%
- Tool-less, easy-access air filter
- · Side-access chain tensioner for quick chain adjustments
- Vibration-reduction system for operator comfort

Engine (cc)	34	
Weight (lbs.)	8.8 (4.0 kg)	
Bar Length (in.)	16	
Fuel Capacity (fl. oz)	8.5 (251 ml)	
Oil Capacity (fl. oz)	8.8 (260 ml)	

CHAINSAW ACCESSORIES

Chainsaw Safety Helmet System

Noise reduction rating 22 dB(A) rated. Part#: 99988801500



Replacement Parts: Part#: 99988801501 - Harness Part#: 99988801502 - Screen Part#: 99988801503 - Visor Frame Part#: 99988801504 - Ear Muffs

20 in. Chainsaw Carry Bag

Dimensions: 18.5 in. (L) x 12 in. (W) x 11.5 (H) Length with scabbard: 37 in. Part#: 103942147



Small Chainsaw Case

Fits most small to medium-sized saws and ECHO saws up to CS-501P with an 18 in. bar. Length with scabbard: 34 in. Dimensions: 17.5 in. (L) x 12 in. (W) x 11.5 in. (H) Part#: 99988801213

ToughChest[™] Chainsaw Cases

Does not fit CS-620PW, CS-7310P/PW, DCS-5000. Dimensions: 20 in. (L) x 12 in. (W) x 12.5 in. (H) without scabbard.

Part#: 99988801210 - ECHO saws up to 20 in. bar

37.75 in. length with scabbard Part#: 99988801211 - ECHO saws

up to 24 in. bar* 41 in. length with scabbard * Does not fit CS-590 with 24 in. DOAS bar







Homeowners can step up in engine displacement to the CS-4010 for greater productivity in firewood processing and storm clean up.

- Purge bulb and momentary stop switch for easy starting
- Side-access chain tensioner for quick chain adjustments
- Translucent fuel and oil tanks for quick level checks

Engine (cc)	41.6
Weight (lbs.)	9.4 (4.3 kg)
Bar Length (in.)	18
Fuel Capacity (fl. oz)	11.8 (349 ml)
Oil Capacity (fl. oz)	7.8 (231 ml)

Palm Debris Guard (optional)

Part#: 91209 - CS-355T Part#: A127000480 - CS-2511P/T




Plastic Scabbard

Fits 12 to 20 in. bars. Part#: 99988801595 - Retail Pkg. of 1 Part#: 89850308034 - Display Box of 12

Stump Vise

Part#: 99988801808



Includes chainsaw safety helmet system, safety glasses, work gloves (L), and professional apron style leg chaps. Length 36 in.

Part#: 99988801527

Chainsaw Chaps*

Expandable 30 in. - 42 in. waist. Meets OSHA standards for leg protection. UL classified in accordance with ASTM F1897-2014. Part#: 99988801300 - 36 in. long, Apron design

Chainsaw Gloves

Features two layers of Kevlar' on the back for cut resistance, and foam pads on the palm for vibration reduction. 100% goatskin leather.

Part#: 99988801600 (M) Part#: 99988801601 (L) Part#: 99988801602 (XL) Part#: 99988801603 (XXL)



*ECHO recommends the use of personal protective equipment when operating ECHO power equipment. Chainsaw chaps and pants may not provide the same level of protection with battery chainsaws as with gas chainsaws.

CS-4510 (CS-4510 (CS-

Whether the work calls for mid-duty cleanup or bucking loads of fi rewood, the CS-4510 delivers power and performance for the long haul.

- Spring-assist starter reduces starting effort
- Heavy-duty air filter with tool-less access provides superior air filtration
- Momentary stop switch automatically returns to "ON" position

Engine (cc)	45
Weight (lbs.)	11.1 (5.0 kg)
Bar Length (in.)	16, 18
Fuel Capacity (fl. oz)	16.2 (479 ml)
Oil Capacity (fl. oz)	11.1 (328 ml)

CS-4920 CS-

A lightweight and powerful chainsaw for heavier jobs, such as installing fence posts, storm clean-up and firewood cutting.

- Purge bulb and stop switch automatically returns to
 "ON" position
- Tool-less air filter cover for easy access
- Side-access chain tensioner for quick chain adjustments

Engine (cc)	50.2
Weight (lbs.)	11.1 (5.0 kg)
Bar Length (in.)	16, 18, 20
Fuel Capacity (fl. oz)	16.2 (479 ml)
Oil Capacity (fl. oz)	11.2 (331 ml)

CS-501P © REAR HANDLE CHAINSAW

Made with pros in mind, the CS-501P is the lightest 50 cc chainsaw in North America, built for heavy use, logging and larger clearing without added effort.

- Aluminum handle with rubber grip
- Lightest chainsaw in its class
- Decompression valve for easier starting
- Two-piece flocked air filter for easy cleaning
- Captive bar nuts eliminate chance of losing fasteners

Engine (cc)	50.2	
Weight (lbs.)	10.6 (4.8 kg)	
Bar Length (in.)	18, 20	
Fuel Capacity (fl. oz)	16.6 (491 ml)	
Oil Capacity (fl. oz)	9.5 (281 ml)	

Chainsaw Kick Guard™

MECHO MAR

Part#: 2894902 - CS-2511P/T through CS-4010, as well as DCS-2500T & DCS-5000 Part#: 2893202 - CS-4510 through CS-7310P/PW

Fastension™

Allows for quick and easy chain adjustments without tools. For CS-400 only. Part#: 99988802200



Bar & Chain Combos

Part #	Length (in.)	Model(s)
12A0CD91PX	12	CS-271T/303T/310/352
14A0CD91PX	14	CS-303T/310/3510/352
16A0CD91PX	16	CS-303T/310/3510/352/400/4010
18A0CD91PX	18	CS-400/4010, DCS-5000
20D0AS72LPX	20	CS-590



The icon. A professionally productive beast for farm, ranch and tree felling. A lightweight, professional-grade 59.8 cc engine provides the confi dence and performance needed to tame the toughest jobs.

- G-Force Engine Air Pre-Cleaner™ for reduced air filter maintenance
- Heavy-duty air filter with tool-less access provides superior air filtration
- Decompression valve for easier starting
- Two-piece flocked air filter for easy cleaning

Engine (cc)	59.8	
Weight (lbs.)	13.2 (6.0 kg)	
Bar Length (in.)	18, 20, 24	
Fuel Capacity (fl. oz)	21.8 (645 ml)	
Oil Capacity (fl. oz)	10.2 (302 ml)	

CS-620P REAR HANDLE CHAINSAW

The CS-620P is a best-in-class professional saw for heavy clearing and logging. It features a Performance Cutting System[™] and comes loaded with user-friendly innovations to keep the sawdust flying.

- Professional-grade magnesium sprocket cover and crankcase
- G-Force Engine Pre-Cleaner™ and heavy-duty air filter provide superior air filtration
- Decompression valve for easier starting
- Heavy-duty, easy-access air filter for convenient in-field servicing

Engine (cc)	59.8	
Weight (lbs.)	13.7 (6.0 kg)	ENGINE AIR PRE-CLEANER
Bar Length (in.)	18, 20, 24, 27	
Fuel Capacity (fl. oz)	21.8 (645 ml)	
Oil Capacity (fl. oz)	10.2 (302 ml)	

CS-620PW C REAR HANDLE CHAINSAW

The pros know what separates ECHO power from everyone else. ECHO built the wrap-handle CS-620PW especially for those with the longest days and the most demanding standards

- Professional-grade magnesium sprocket cover and crankcase
- G-Force Engine Pre-Cleaner™ and heavy-duty air filter provide superior air filtration
- Decompression valve for easier starting
- Heavy-duty, easy-access air filter for convenient in-field servicing
- Heavy-duty full-wrap aluminum handle with rubber grip

59.8	
14.1 (6.4 kg)	
20, 24, 27	
21.8 (645 ml)	
10.2 (302 ml)	
	14.1 (6.4 kg) 20, 24, 27 21.8 (645 ml)

Bumper Spike (optional)

Part#: 99988802100 - CS-590 (right side mount) Part#: C304000000 - CS-2511P (left side mount)



CS-680 (1) (2) REAR HANDLE CHAINSAW

MECHO.

When a paycheck depends on performance, the pros reach for the CS-680. With 66.8 cc's of professional-grade ECHO power and available 20, 24 and 27 in. Performance Cutting System[™] bar upgrades, it cuts the toughest jobs down to size.

- Performance Cutting System™
- Aluminum handle with rubber grip
- Top-mounted, tool-less access air filter cover for quick maintenance
- Side-access chain tensioner for easy chain adjustment

Engine (cc)	66.8
Weight (lbs.)	14.6 (6.6 kg)
Bar Length (in.)	20, 24, 27
Fuel Capacity (fl. oz)	21.6 (639 ml)
Oil Capacity (fl. oz)	12.5 (370 ml)

CS-7310P (1) (2) REAR HANDLE CHAINSAW

The CS-7310P Chainsaw is not only ECHO's most powerful chainsaw in North America but it has the features arborists and loggers need to tackle tough jobs. The CS-7310P is powerful, durable, and ready to work as long as you do.

- Professional-grade magnesium sprocket cover and crankcase
- Four-stage air filtration system cleans air and reduces air filter maintenance
- Translucent fuel tank for quick fuel level checks
- Available with .050 in. gauge or .058 in. gauge chain

Engine (cc)	73.5
Weight (lbs.)	14.8 (6.7 kg)
Bar Length (in.)	20, 24, 28, 32
Fuel Capacity (fl. oz)	27.1 (801 ml)
Oil Capacity (fl. oz)	12.2 (361 ml)

CS-7310PW (III) (IIII) (III) (III) (III) (III) (III) (III) (III) (III) (III) (

Power and maneuverability. The wrap-handle CS-7310PW is the most powerful ECHO chainsaw in North America. It owns a hard-earned reputation among professionals for all-day performance and all-world power.

- Full-wrap aluminum handle with rubber grip
- Professional-grade magnesium sprocket cover and crankcase
- Four-stage air filtration system cleans air and reduces air filter maintenance
- Translucent fuel tank for quick fuel level checks
- Available with .050 in. gauge or .058 in. gauge chain

Engine (cc)	73.5
Weight (lbs.)	15.4 (7.0 kg)
Bar Length (in.)	24, 28, 32
Fuel Capacity (fl. oz)	27.1 (801 ml)
Oil Capacity (fl. oz)	12.2 (361 ml)

ARBORIST CHAINSAWS	CS-2511T/TN	CS-2511P/PN	CS-271T	CS-355T	CS-361P
Features and Benefits					
Dual-post chain brake for extra durability	•	•		•	
Tool-less air filter cover for easy access			•		•
Tall profile bar with multi-rivet nose for longer life				•	•
Premium chain with extended-length cutters for greater life	•	•		•	•
Vibration-reduction system for operator comfort	•	•	•	•	•
i-30™ starting system for 30% starting/pulling effort reduction			•		
Spring-assisted starting system for reduced effort starting	•	•		•	•
Digital ignition system provides Intelligent electronic programing for precise ignition timing at all operating speeds	•	•	•	•	•
Integrated choke and fast idle with trigger release	•	•	•	•	•
G-Force Engine Air Pre-Cleaner [™] for cleaner air supply to engine	•	•	•	•	•
Automatic, adjustable clutch-driven oiler for reduced oil consumption	•	•	•	•	•
Replaceable, metal bumper spike for improved control		•		•	•
Metal lanyard ring for easy attaching and detaching to harness	•			•	
Optional metal bumper spike for more control	•	•	•		
Purge bulb for easy starting	•	•	•	•	•

SPECIFICATIONS

Model	Engine Disp. (cc)	Starting System	Purge Bulb	Oiling System	Vibration Reduction	Available Bar Length (in)	Fuel Cap. (fl. oz.)	Oil Cap. (fl. oz.)	Dry Weight* (lbs.)
CS-2511T/TN	25.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	12, 14	6.4	4.7	5.2
CS-2511P/PN	25.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	12, 14	6.4	4.7	5.7
CS-271T	26.9	i-30™	Yes	Auto/Adjustable**	Yes	12	8.1	5.4	6.6
CS-355T	35.8	Spring-Assist	Yes	Auto/Adjustable**	Yes	14, 16	11.2	8.2	8.0
CS-361P	35.8	Spring-Assist	Yes	Auto/Adjustable**	Yes	14, 16	10.8	7.8	8.4

*without bar and chain **clutch-driven

REAR HANDLE CHAINSAWS

Fe	atures and Benefits
Dı	al-post chain brake for extra durability
То	ol-less air filter cover for easy access
Αι	tomotive-style air filter for superior filtration
Тν	vo-piece air filter for easy cleaning
Μι	Iltiple stage air filtration system
Fe	lt air filter
Rc	und felt air filter
	Force Engine Air Pre-Cleaner [∞] for eaner air supply
Vil	pration-reduction system for operator comfort
	O [∞] starting system for 30% starting/ Iling effort reduction
Sp	ring-assisted starting system for reduced effort starting
ele	gital ignition system provides Intelligent ectronic programing for precise ignition timing all operating speeds
Int	egrated choke and fast idle with trigger release
Αι	itomatic clutch-driven oiler for reduced oil usage
	itomatic, adjustable clutch-driven oiler for duced oil usage
Αι	itomatic, adjustable oiler with manual override
	rformance Cutting System [™] - upgraded r and chain
	placeable, metal bumper spike for proved control
De	compression valve for easy starting
Al	uminum handle with rubber grip for

Purge bulb for easy starting

improved comfort

Wrap handle for more gripping options

Translucent fuel tank for easy level checks

CS-3410	CS-3510	CS-352	CS-4010	CS-4510	CS-4920	CS-501P	CS-590	CS-620P	CS-620PW	CS-680	CS-7310P	CS-7310PW
			-									
•	•	•	•	•	•	•	•	•	•		•	•
•		•		•	•	•	•	•	•	•		
										•	•	•
•	•	•			•	•	•	•	•			
	•			•							•	•
			•									
				•	•							
•		•				•	•	•	•			
 •	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•									
				•	•							
•	•	•	•	•	•	•	•	•	•		•	•
•	•	•	•	•	•	•	•	•	•		•	•
•	•	•	•									
				•	•	•	•	•	•		•	•
										•		
						•		•	•	•	•	•
			•	•	•	•	•	•	•	•	•	•
						•	•	•	•		•	•
						•		•	•	•	•	•
•	•	•	•	•	•							
									•			•
•	•		•	•	•	•	•	•	•		•	•

(+) Bar lengths available as accessories only *without bar and chain **clutch-driven ***with manual override

Model	Engine Disp. (cc)	Starting System	Purge Bulb	Oiling System	Vibration Reduction	Available Bar Length (in)	Fuel Cap. (fl. oz.)	Oil Cap. (fl. oz.)	Dry Weight* (lbs.)
CS-3410	34.4	i-30™	Yes	Automatic**	Yes	14, 16	9.47	7.78	8.2
CS-3510	34.4	i-30™	Yes	Automatic**	Yes	16	9.5	7.8	8.2
CS-352	34.0	i-30™	Yes	Automatic**	Yes	16	8.5	8.8	8.8
CS-4010	41.6	i-30™	Yes	Automatic**	Yes	18	11.8	7.8	9.4
CS-4510	45.0	Spring-Assist	Yes	Auto/Adjustable**	Yes	16, 18	16.2	11.1	11.1
CS-4920	50.2	Spring-Assist	Yes	Auto/Adjustable**	Yes	16, 18, 20	16.2	11.2	11.1
CS-501P	50.2	Standard	No	Auto/Adjustable**	Yes	16 (+), 18, 20	16.6	9.5	10.6
CS-590	59.8	Standard	No	Auto/Adjustable**	Yes	18, 20, 24	21.8	10.2	13.2
CS-620P/PW	59.8	Standard	No	Auto/Adjustable**	Yes	16 (+), 18 (+ 620PW), 20, 24, 27	21.8	10.2	13.7/14.1
CS-680	66.8	Standard	No	Auto/Adjustable***	Yes	20, 24, 27	21.6	12.5	14.6
CS-7310P/PW	73.5	Standard	No	Auto/Adjustable***	Yes	20 (7310P), 24, 28, 32	27.1	12.2	14.8/15.4

SPECIFICATIONS



Chain Sharpening Files

Reference the chart on page **45** to find the correct size for your chain.



Part #	File Size (in.)	File Size (mm)	Description				
99988801700	5/32	4.0	File, 2-Pack				
99988801720	5/32 4.0		File (box of 12)				
99988801701	11/64	4.5	File, 2-Pack				
99988801721	11/64	4.5	File (box of 12)				
99988801702	3/16	4.8	File, 2-Pack				
99988801722	3/16	4.8	File (box of 12)				
99988801703	13/64	5.2	File, 2-Pack				
99988801723	13/64	5.2	File (box of 12)				
99988801704	7/32	5.5	File, 2-Pack				
99988801724	7/32	5.5	File (box of 12)				
99988801760	6	152	Flat File (box of 12)				
99988801761	Plastic File Handle, Blue, Pkg of 1						
99988801762	(ile Handle, etail Pkg of 1				
99988801763	Or		ile Handle, blay Box of 20				

Felling Wedges

Part #	Length (in.)	Description	Qty.
99988801806	5.5	Smooth	1
96120000208	8	Smooth	12
96120000209	8	Spiked	12



Chain Sharpening Kits

Kit includes (2) round files, (1) flat file, file guide, depth gauge, and plastic handle.





Part #	Size (in.)
96120000019	5/32
96120000020	7/32
96120000021	3/16
96120000022	4.5mm

BARS AND CHAINS

		BAR					CHAIN		
Chainsaw Models	Length in (cm)	Sprocket Nose	Bar Part #	Drive Link Count	Gauge (in.)	Pitch (in.)	Chain Part #	File Size (in.)	3-pack Chain
CS-2511P, CS-2511T,	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PXL45CQ	5/32	-
DCS-2500T	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PXL52CQ	5/32	-
00.0547	12 (30)	Non-Replaceable	12A4CD3745C	45	.043	3/8 lp	90PX45CQ	11/64	-
CS-2511T	14 (35)	Non-Replaceable	14A4CD3752C	52	.043	3/8 lp	90PX52CQ	11/64	-
CS-2511PN,	12 (30)	Non-Replaceable	12A4CD3251C	51	.043	.325 lp	80TXL51CQ	5/32	-
CS-2511TN	14 (35)	Non-Replaceable	14A4CD3259C	59	.043	.325 lp	80TXL59CQ	5/32	-
CS-271T	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
CS-2/11	12 (30)	Non-Replaceable	12A4CD3745C	45	.043	3/8 lp	90PX45CQ	11/64	-
	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
CS-303T, CS-310	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
CS-355T	12 (30)	Non-Replaceable	12A0ED3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
CC 7557 CC 7010	14 (35)	Non-Replaceable	14A0ES3752C	52	.050	3/8 lp	91PXL52CQ	5/32	-
CS-355T, CS-361P	16 (40)	Non-Replaceable	16A0ES3757C	57	.050	3/8 lp	91PXL57CQ	5/32	-



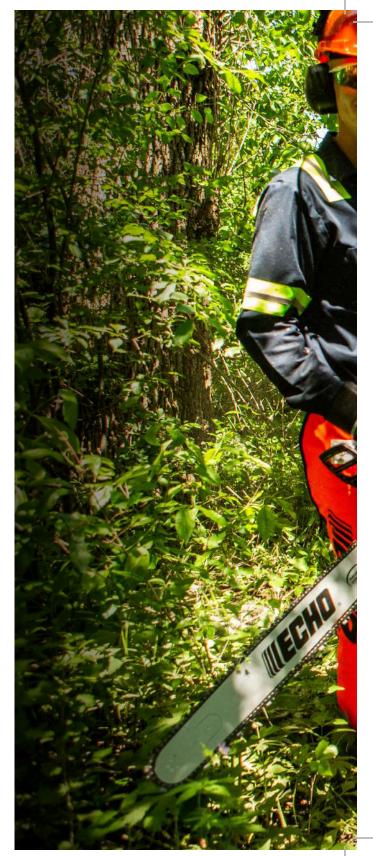

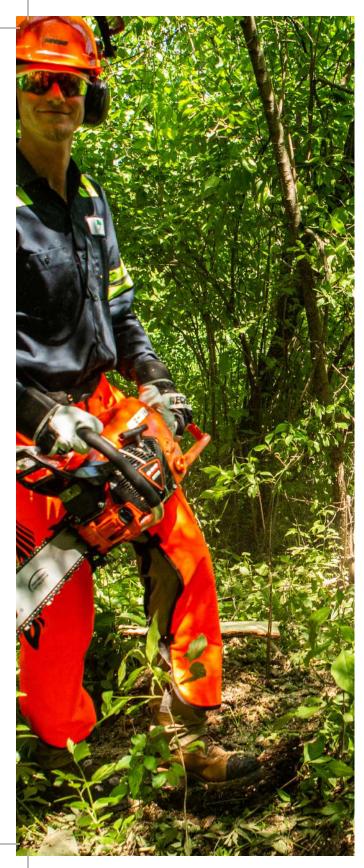

						lp = Low Pro	file * Solid bar	s, all other l	oars are laminated
		BAR		CHAIN					
Chainsaw Models	Length in (cm)	Sprocket Nose	Bar Part #	Drive Link Count	Gauge (in.)	Pitch (in.)	Chain Part #	File Size (in.)	3-pack Chain
CS-3410, CS-3510	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
CS-3410, CS-3510	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
	12 (30)	Non-Replaceable	12A0CD3745C	45	.050	3/8 lp	91PX45CQ	5/32	-
CS-352	14 (35)	Non-Replaceable	14A0CD3752C	52	.050	3/8 lp	91PX52CQ	5/32	91PX52CQ-3
	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
CS-4010	16 (40)	Non-Replaceable	16A0CD3757C	57	.050	3/8 lp	91PX57CQ	5/32	91PX57CQ-3
03-4010	18 (45)	Non-Replaceable	18A0CD3762C	62	.050	3/8 lp	91PX62CQ	5/32	91PX62CQ-3
	16 (40)	Non-Replaceable	16B0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
CS-4510	18 (45)	Non-Replaceable	18B0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20B0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
	16 (40)	Non-Replaceable	16F0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
CS-4910	18 (45)	Non-Replaceable	18F0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20F0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
	16 (40)	Non-Replaceable	16B0AD3366C	66	.050	.325	20BPX66CQ	3/16	-
CS-4920	18 (45)	Non-Replaceable	18B0AD3372C	72	.050	.325	20BPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20B0AD3378C	78	.050	.325	20BPX78CQ	3/16	-
	16 (40)	Non-Replaceable	16F0LD3366C	66	.050	.325	20LPX66CQ	3/16	-
CS-501P	18 (45)	Non-Replaceable	18F0LD3372C	72	.050	.325	20LPX72CQ	3/16	-
	20 (50)	Non-Replaceable	20F0LD3378C	78	.050	.325	20LPX78CQ	3/16	-
	18 (45)	Non-Replaceable	18D0AS3864C	64	.050	3/8	72LPX64CQ	7/32	-
00 500	20 (50)	Non-Replaceable	20D0AS3870C	70	.050	3/8	72LPX70CQ	7/32	72LPX70CQ-3
CS-590	24 (60)	Non-Replaceable	24D0AS3884C	84	.050	3/8	72LPX84CQ	7/32	-
	24 (60)	Replaceable	24D0PS3881C*	81	.050	3/8	72LPX81CQ	7/32	-
	16 (40)	Replaceable	16D0PS3860C*	60	.050	3/8	72LPX60CQ	7/32	-
	18 (45)	Replaceable	18D0PS3866C*	66	.050	3/8	72LPX66CQ	7/32	-
CS-620P, CS-620PW, CS-680	20 (50)	Replaceable	20D0PS3870C*	70	.050	3/8	72LPX70CQ	7/32	72LPX70CQ-3
C3-020F W, C3-000	24 (60)	Replaceable	24D0PS3881C*	81	.050	3/8	72LPX81CQ	7/32	-
	27 (68)	Replaceable	27D0PS3893C*	93	.050	3/8	72LPX93CQ	7/32	-
	20 (50)	Replaceable	20H0PS3872C*	72	.050	3/8	72LPX72CQ	7/32	-
	20 (50)	Replaceable	20H8PS3872C*	72	.058	3/8	73LPX72CQ	7/32	-
	24 (60)	Replaceable	24H0PS3884C*	84	.050	3/8	72LPX84CQ	7/32	-
CS-7310P,	24 (60)	Replaceable	24H8PS3884C*	84	.058	3/8	73LPX84CQ	7/32	-
CS-7310PW	28 (70)	Replaceable	28H0PS3893C*	93	.050	3/8	72LPX93CQ	7/32	-
	28 (70)	Replaceable	28H8PS3892C*	92	.058	3/8	73LPX92CQ	7/32	-
	32 (80)	Replaceable	32H0PS3805C*	105	.050	3/8	72LPX105CQ	7/32	-
	32 (80)	Replaceable	32H8PS3805C*	105	.058	3/8	73LPX105CQ	7/32	-
DCS-2500TN	12 (30)	Non-Replaceable	12A4CD3251C	51	.043	.325 lp	80TXL51CQ	5/32	-
DCS-5000	18 (45)	Non-Replaceable	18A0CD3762C	62	.050	3/8 lp	91PX62CQ	5/32	91PX62CQ-3

The part numbers listed above (e.g. 91PXL52CQ) include a two-or three-letter code that references the chain type. See detailed descriptions below.

CHAIN TYPE: LOW-KICKBACK CHAIN

- **PX** Low-vibration chamfer chisel chain cutters with ramped depth gauges, bumper drive links and standard sequence.
- **BPX** Low-vibration chisel cutters with bumper drive links and standard sequence.
- **PXL** Low-vibration semi-chisel cutter with ramped depth gauges, bumper drive links and longer top plate.
- TXL Low-vibration micro-chisel cutters with ramped depth gauge and bumper drive-links.

CHAIN TYPE: PROFESSIONAL CHAIN

- **LPX** Round-ground chisel cutters with bumper drive links and standard sequence.
- **VXL** Low-vibration semi-chisel cutter with ramped depth gauges and longer top plate.

POWER PRUNERS[®]

ECHO Power Pruners provide extra long reach for fast, easy and safe tree pruning while keeping your feet on the ground. Available in either fixed length or telescoping configurations, a Power Pruner can provide a reach of over 12 feet depending on the model (and even longer with optional extensions). The lightweight design and comfortable controls ensure maximum operator comfort. Heavy-duty gearboxes feature dual-sealed bearings and spiral cut steel gears for maximum lubrication, durability and cutting performance. An adjustable oiler delivers the right amount of oil, every time, for exceptional chain lubrication. The chain tensioning system improves cutting performance and extends bar and chain life. ECHO Power Pruners deliver commercial-grade performance and optimum tree care versatility.

PPF-225 CO POWER PRUNER®

The ergonomic PPF-225 Power Pruner® pole saw features a 94 in. fixed shaft for pruning branches in hard-to-reach places. An i-30[™] starter system reduces starting effort by 30%, helping to maximize productivity.

- i-30[™] starter reduces starting effort by 30%
- Front and rear handle rubber grips for operator comfort and reduced vibration
- Lightweight magnesium gear case with side access chain tensioner
- 3 ft. extension also available

Engine (cc)	21.2
Weight (lbs.)	12.8 (5.8 kg)
Bar Length (in.)	10
Overrall Length (in.)	94
Fuel Capacity (fl. oz)	14.2 (500 ml)
Oil Capacity (fl. oz)	6.6 (195 ml)



The PPF-2620 Power Pruner[®] pole saw with a 96 in. fixed shaft combines lightweight design & user-friendly ergonomics. Two-stage air filtration and a side-access chain tensioner simplify in-field maintenance.

- Front and rear handle rubber grips for operator comfort and vibration reduction
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Lightweight magnesium gear case with side access chain tensioner
- Automatic, adjustable oiler to match cutting conditions

Engine (cc)	25.4
Weight (lbs.)	13.2 (6.0 kg)
Bar Length (in.)	12
Overrall Length (in.)	96
Fuel Capacity (fl. oz)	20.6 (609 ml)
Oil Capacity (fl. oz)	6.6 (195 ml)

PPT-2620 POWER PRUNER®

The PPT-2620 Power Pruner® pole saw with loop handle features a telescoping shaft able to reach more than 12 feet. With an a two-stage air filter and a fuel tank 14% larger than competitors, it's made to handle professional workloads.

- Ergonomic loop handle with rubber grip for comfort and vibration reduction
- Shaft telescopes to over 12 feet in length
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Automatic, adjustable oiler to match cutting conditions

Engine (cc)	25.4
Weight (lbs.)	17.4 (7.9 kg)
Bar Length (in.)	12
Overrall Length (in.)	107-146
Fuel Capacity (fl. oz)	20.6 (609 ml)
Oil Capacity (fl. oz)	6.6 (195 ml)

PPT-2620H III CO POWER PRUNER®

The PPT-2620H Power Pruner® pole saw with in-line handle features a telescoping shaft able to reach more than 12 feet. Its ergonomic design, two-stage air filter and larger fuel tank are made to comfortably handle long days and professional workloads.

- In-line handle with rubber grip for comfort and vibration reduction
- Shaft telescopes to over 12 feet in length
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Automatic, adjustable oiler to match cutting conditions

Engine (cc)	25.4
Weight (lbs.)	17 (7.7 kg)
Bar Length (in.)	12
Overrall Length (in.)	107-146
Fuel Capacity (fl. oz)	20.6 (609 ml)
Oil Capacity (fl. oz)	6.6 (195 ml)



POWER PRUNER® ACCESSORIES

1 million

3 ft. extension (Fixed only)

Fits all PPF models. Extended reach up to 10 ft. 9 in. Part#: 99946400011

4 ft. Extension (Telescoping only)

Fits all PPT models. Extended reach up to 16 ft. 2 in. Part#: 99946400023

								A CARDON AND A CARDON
	BAR					CHAIN		
Power Pruner' Models	Length in (cm)	Nose	Bar Part #	Drive Link Count	Gauge (in.)	Pitch (in.)	Chain Part #	File Size (in.)
PPF-225, 99944200532	10 (25)	Sprocket Nose	10A0CD3739C	39	.050	3/8 lp	91VXL39CQ	5/32
PPF-2620, PPT-2620/H	12 (30)	Sprocket Nose	12A0CD3744C	44	.050	3/8 lp	91VXL44CQ	5/32
PPF-225,	10 (25)	Sprocket Nose	10A4CD3739C	39	.043	3/8 lp	90PX39CQ	11/64
99944200532 PPF-2620, PPT-2620/H	12 (30)	Sprocket Nose	12A4CD3744C	44	.043	3/8 lp	90PX44CQ	11/64

lp=Low Profile

The part numbers listed above (e.g. 91PXL52CQ) include a two-or three-letter code that references the chain type. See detailed descriptions below.

CHAIN TYPE: PROFESSIONAL CHAIN

PPF-225

LPX Round-ground chisel cutters with bumper drive links and standard sequence.

PPF-2620

VXL Low-vibration semi-chisel cutter with ramped depth gauges and longer top plate

PPT-2620

*without bar and chain

PPT-2620H

CHAIN TYPE: LOW-KICKBACK CHAIN

	Low-vibration chisel cutters with ramped depth gauges, bumper drive links and standard sequence.
BPX	Low-vibration chisel cutters with bumper drive links and standard sequence.

PXL Low-vibration semi-chisel cutter with ramped depth gauges, bumper drive links and longer top plate.

POWER PRUNERS[®]

Features and Benefits				
Tool-less air filter cover for easy access	•	•	•	•
2-stage air filter for improved filtration and long engine life		•	•	•
i-30" starting system for 30% starting effort reduction	•			
Digital ignition system provides Intelligent electronic programming for precise ignition timing at all operating speeds	•	•	•	•
Purge bulb for easy starting	•	•	•	•
Galvanized steel tube for rigidity and durability	•	•		
Aluminum inner drive shaft for torsion strength and lightweight			•	•
Ribbed fiberglass outer shaft for rigidity and control			•	•
Ergonomic rubber grip loop handle with overmolding for comfort and durability			•	
In-line handle with rubber grip for comfort	•	•		•
Shock-absorbing drive shaft prevents damage to shaft	•	•	•	•
Automatic, adjustable oiler to match cutting conditions	•	•	•	•
Side-access chain tensioner for quick chain adjustments	•	•	•	•
Multi-layer flexible cable drive with lifetime warranty for buyer confidence	•	•	•	•
Rubberized front hand grip for comfort and vibration reduction	•	•		
1.5:1 gear ratio provides torque needed to cut large branches	•	•	•	•
Telescoping shaft for a variety of cutting heights			•	•

SPECIFICATIONS

Model	Engine Disp. (cc)	Starting System	Fuel Cap. (fl. oz.)	Oil Cap. (fl. oz.)	Length Collapsed (in.)	Length Extended (in.)	Optional Extension (ft.)		Dry Weight* (lbs.)
PPF-225	21.2	i-30™	14.2	6.6	94	-	3	10	12.8
PPF-2620	25.4	Standard	20.6	6.6	96	-	3	12	13.2
PPT-2620	25.4	Standard	20.6	6.6	107	146	4	12	17.4
PPT-2620H	25.4	Standard	20.6	6.6	107	146	4	12	17.0



CUT-OFF SAW

ECHO's powerful, easy-to-use cut-off saw is a hardscape pro favorite because of its exceptional cutting performance. With a class-leading hightorque drive system, you have a greater ability to cut through blocks or concrete without stalling. The CSG-7410 is easy to start thanks to a springassist starter, decompression valve, choke with fast idle and purge bulb. The reversible cutting arm enables you to switch from a standard position to outside mount for flush cutting.





CSG-7410 © CUT-OFF SAW

Easy cuts for hardscape pros. The CSG-7410 features a high drive ratio for improved cutting through thick masonry blocks and dense concrete. It includes a four-stage air filtration system and a quick-release hose adapter.

- Class-leading high-torque drive system
- Patented 4-stage air cleaner provides the engine with clean air for long life
- Easy starting system includes reduced effort starter and decompression valve
- Reversible cutting arm can be moved to enable cutting near a wall or close to the ground

Engine (cc)	73.5
Weight (lbs.)	22.7 (10.3 kg)
Wheel Diameter (in.)	14
Fuel Capacity (fl. oz)	23.7 (701 ml)

CUT-OFF SAW Accessories

Pressurized Water Tank

3-gallons, fits the CSG-7410 and most competitive cut-off saws. Part#: 99988805000

SPECIFICATIONS


Engine Disp.	Max. Engine Speed	Spindle Speed	Dry Weight	Wheel Diameter	Max. Cutting Depth	Arbor Size		
73.5 cc	9,800 rpm	3,820 rpm	22.7 lbs.	14 in.	4.9 in.	20 & 25.4 mm		



Cut-Off Saw Cart*

Designed for use with the CSG-7410 cut-off saw featuring 6-step cutting depth, 2.6 gal. water tank, and easy access engine throttle for anywhere a wheeled concrete saw is needed. Part#: CWT-7410

*Handle design shown in image above is for visual purposes only

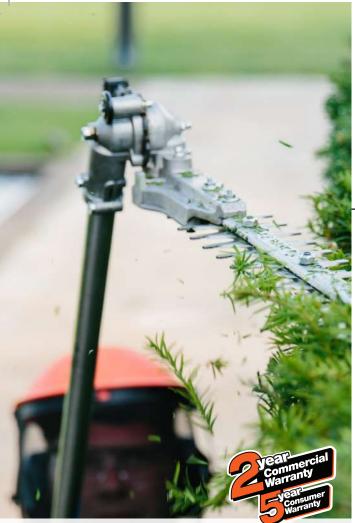

SUGGESTED HEDGE TRIMMER APPLICATION







LOW/SMALL TRIMMING MEDIUM TRIMMING TALL/LARGE TRIMMING HC-2020 HCS-2810 SHC-225 HC-155 HCS-3810 SHC-2620 HC-2210 SHC-225S SHC-2620S DHC-2300 SHC-225 HCA-2620 HC-2810 HCA-2620S

HC-2020 HEDGE TRIMMER

The HC-2020 hedge trimmer is built to professional standards but perfectly accessible for homeowners maintaining their landscaping. With a balanced, lightweight construction and 20-in. double-sided blades, it adds beauty without adding user fatigue.

- Lightweight design for reduced operator fatigue
- 20 in. double-sided, double-reciprocating
- RazorEdge® blades feature three sharpened edge for more efficient cutting
- Two-stage air filtration system dramatically increases cleaning capability and allows for longer maintenance intervals

Engine (cc)	21.2
Weight (Ibs.)	10 (4.5 kg)
Blade Length (in.).	20
Fuel Capacity (fl. oz)	13.2 (390 ml)

Featuring 24-in. double-sided, double-reciprocating RazorEdge® blades to make quick, precise work of overgrown hedges and bushes, the HC-155 is easy to start, easy to use, and ideal for maintaining a home's curb appeal.

👁 🔂 HC-155

- 24 in. double-sided, double-reciprocating
- RazorEdge[®] blades feature three sharpened edge for more efficient cutting
- i-30 $^{\mbox{\tiny M}}$ starter reduces starting effort by 30%
- Commercial-duty air filtration system for long engine life

Engine (cc)	21.2
Weight (Ibs.)	11.3 (10.3 kg)
Blade Length (in.).	24
Fuel Capacity (fl. oz)	16.9 (500 ml)

HEDGE TRIMMERS

ECHO hedge trimmers deliver commercial-grade performance in single-sided and double-sided blade configurations, as well as shafted models. ECHO hedge trimmers are tough, reliable and loaded with intelligent features like throttle lock-out to help prevent accidental blade engagement, commercialgrade gear cases and cutting blades for the heaviest applications, and vibration-reducing engine mounts and padded handles for operator comfort. Every hedge trimmer has ECHO's exclusive RazorEdge[®] blades, which have three sharpened edges per tooth, enabling the blade to start cutting plant material before they are engaged, giving you the most efficient cut possible.



540255

546-225

HEDGE TRIMMER

Made to help pros meet the needs of demanding clients and properties. With best-in-class performance and a host of user-friendly features, it cuts smoothly to transform overgrown bushes and hedges into beautiful, brag-worthy landscaping.

- Lightest hedge trimmers in its class
- 3-position 180 degree rotating handle for increased maneuverability
- Double-sided, double-reciprocating RazorEdge® blades
- Full-spring suspension system reduces vibration for operator comfort
- Front-facing exhaust prevents plant damage

Engine (cc)	21.2
Weight (Ibs.)	11/11.4 (5.0/5.2 kg)
Blade Length (in.).	22/28
Fuel Capacity (fl. oz)	12.5 (370 ml)

SHC-225/SHC-225S Shafted Hedge Trimmers

These professional-grade shafted hedge trimmers make quick work of stray branches. With a comfortable design and offset gear case, it simplifies cuts at awkward angles or in hard-to-reach places.

- 21 in. double-sided, double reciprocating RazorEdge* blades feature three sharpened edges for more efficient cutting
- i-30[™] starter reduces starting effort by 30%
- Vibration reduction system for increased comfort
- Commercial-duty air filtration system for long engine life

Engine (cc)	21.2
Weight (Ibs.)	12.1/12.3 (5.5/5.6 kg)
Shaft Length (in.)	33/20
Blade Length (in.).	21
Fuel Capacity (fl. oz)	12.8 (371 ml)



STIC PEROS

Power, precision, performance, and reach. These best-inclass hedge trimmers pair pro-grade muscle with lightweight construction to power through tough jobs and hard-to-reach hedges. A gear case offset by 7° also adds smoothness and precision for demanding cuts.

- 21 in. double-sided, double-reciprocating RazorEdge^{*} blades feature three sharpened edges for more efficient cutting
- Tool-less access, two-stage air filtration system dramatically increases ease of maintenance
- 7 degree angled shaft provides a wide-angle view for trimming complex shapes (for SHC-2620 only)
- Bellows-style fuel transfer system provides for easy start-ability especially for re-starts in hot, dusty climates

Engine (cc)	25.4
Weight (Ibs.)	13.2/12.7 (6.0/5.8 kg)
Shaft Length (in.)	51/42
Blade Length (in.).	21
Fuel Capacity (fl. oz)	20.6 (609 ml)

HCA-2620/HCA-2620S ARTICULATING SHAFTED HEDGE TRIMMERS

These best-in-class articulating-shaft hedge trimmers can pivot 135° to provide precise cuts with minimal difficulty. Balanced and lightweight, it's built for smooth maneuverability day after day and job after job.

- 21 in. double-sided, double-reciprocating
- RazorEdge* blades feature three sharpened edges for more efficient cutting
- Tool-less access air filtration system for easy and convenient in-field servicing
- Articulating gear case allows 10 blade adjustments with a total range of 135 degrees
- Vibration-reduction system isolates front and rear handles from the engine and gear case for operator comfort

Engine (cc)	25.4
Weight (lbs.)	14.8/13.6 (6.7/6.2 kg)
Shaft Length (in.)	59/33
Blade Length (in.).	21
Fuel Capacity (fl. oz)	20.6 (609 ml)

HEDGE TRIMMER ACCESSORIES

Tip Guards


Part#: 99988802000 - HC-155 and all SHC models Part#: 99988802010 - HCA-2620 Part#: 99988802020 - For all single-sided models Part#: 99988802030 - HC-2020



Red Armor[®] Blade Cleaner and Lubricant

Get rid of what's collected along your blade. Our exclusive formula reduces friction, prevents corrosion, and promotes post-trimming plant health. Part#: 4550012 - 12 fl. oz. bottle



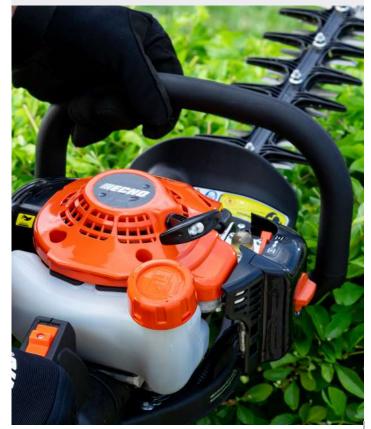

HEDGE TRIMMERS	HC-2020	HC-155	HC-2210	HC-2810	SHC-225	SHC-225S	SHC-2620	SHC-2620S	HCA-2620	HCA-2620S
Features and Benefits										
Tool-less air filter cover for easy access	•	•	•	•	•	•	•	•	•	•
Commercial-grade felt air filtration for long engine life	•	•	•	•	•	•				
2-stage pleated air filtration for long engine life							•	•	•	•
Purge bulb for easy starting	•	•	•	•	•	•	•	•	•	•
i-30 [™] starting system for 30% starting/pulling effort reduction	•	•	•	•	•	•				
RazorEdge* blades feature three sharpened edges for more efficient cutting	•	•	•	•	•	•	•	•	•	•
Grease-able gear case for easy maintenance and longer life	•	•	•	•	•	•	•	•	•	•
Rigid support bars for straighter and more precise cuts	•	•	•	•	•	•	•	•	•	•
Tip guard prevents blade contact with buildings, fences, or the ground	•	•			•	•	•	•	•	•
3-position 180° rotating handle for a variety of cutting positions			•	•						
Heavy-duty vibration-reduction system for operator comfort			•	•	•	•	•	•	•	•
Ergonomic rubber grip front handle with overmolding for comfort and durability					•	•				
Ergonomic rubber grip throttle handle with overmolding for comfort and durability					•	•	•	•	•	•
Cushioned front handle for increased comfort							•	•	•	•
Front facing exhaust prevents plant damage			•	•						

SPECIFICATIONS

Model	Engine Disp. (cc)	Carb. (w/Purge Pump)	Starting System	Fuel Cap. (fl. oz.)	Blade Length (in.)	Shaft Length (in.)	Double-Reciprocating Cutter Type	Dry Weight (lbs.)
HC-2020	21.2	Rotary	i-30™	13.2	20	-	Double Sided	10.0
HC-155	21.2	Rotary	i-30™	16.9	24	-	Double Sided	11.3
HC-2210	21.2	Rotary	i-30™	12.5	22	-	Double Sided	11.0
HC-2810	21.2	Rotary	i-30™	12.5	28	-	Double Sided	11.4
SHC-225	21.2	Rotary	i-30™	12.8	21	33	Double Sided	12.1
SHC-225S	21.2	Rotary	i-30™	12.8	21	20	Double Sided	12.3
SHC-2620	25.4	Rotary	Standard	20.6	21	51	Double Sided	13.2
SHC-2620S	25.4	Rotary	Standard	20.6	21	42	Double-Sided	12.7
HCA-2620	25.4	Rotary	Standard	20.6	21	59	Double Sided	14.8
HCA-2620S	25.4	Rotary	Standard	20.6	21	33	Double Sided	13.6



PRO ATTACHMENT Series™

The ECHO Pro Attachment Series[™] (PAS) is the perfect all-in-one solution. In a word, the system delivers versatility. The application flexibility of this expandable lineup is as limitless as your changing job requirements. When your job requires a change, a simple tool-less coupler makes changing to another tool quick and easy. The PAS system is also economical without having to purchase stand-alone, dedicated units or maintain multiple engines - all you need is one power head and a collection of attachments.



PAS-225 POWERHEAD

The PAS-225 powerhead saves space, time, effort, and money by pairing with twelve available PAS attachments. With professional-grade power and an easy, secure attachment connection, it keeps you prepared for anything the workday can throw your way.

- Tool-less coupler allows for fast easy changes on multiple
 attachments
- i-30 $^{\rm \tiny M}$ starter reduces starting effort by 30%
- Vibration reduction system for increased comfort
- Accepts up to 12 PAS attachments

Engine (cc)	21.2
Weight (Ibs.)	9.3 (4.2 kg)
Shaft Length (in.)	40.7
Fuel Capacity (fl. oz)	14.2 (420 ml)

POWERHEAD + TRIMMER + BLOWER ATTACHMENT

The PAS-225VPB features the PAS-225 powerhead with a blower attachment and a Speed-Feed® 400 trimmer head attachment included.

- i-30[™] starter reduces starting effort by 30%
- Blower attachment features 100 MPH air flow and 317 CFM
- Accepts up to 12 PAS attachments

Engine (cc)	21.2
Head Weight (Ibs.)	9.3 (4.2 kg)
Total Shaft Length (in.)	40.7
Fuel Capacity (fl. oz)	14.2 (420 ml)
Cutting Head	Speed-Feed [®] 400
Cutting Swath (in.)	17
Max Air Speed At Nozzle (mph)	100 (161 km/h)
Air Volume At Nozzle (CFM)	317

PAS-225SB POWERHEAD + TRIMMER ATTACHMENT

The PAS-225SB features the PAS-225 powerhead with a Speed-Feed® 400 trimmer head attachment included. Designed for unmatched versatility, the trimmer head attachment can be swapped out in seconds for use with twelve available PAS attachments.

- i-30[™] starter reduces starting effort by 30%
- Durable debris shield with cut-off knife
- Accepts up to 12 PAS attachments

21.2
9.3 (4.2 kg)
59
14.2 (420 ml)
Speed-Feed* 400
17

The all-job versatility you want, with the all-day ECHO power you need. Whether the work calls for trimming, blowing, brushcutting, edging, bed redefining, sweeping, pruning, hedge trimming or tilling, the best-in-class PAS-2620 powerhead is up to the task.

PAS-26

POWERHFAD

- Tool-less coupler allows for fast easy changes on up to 15 attaments
- Two-stage air filtration system increases cleaning capability and allows for longer maintenance intervals
- Engine vibration reducing mounting absorbs engine vibration
- Cushioned front and rear handles increase operator comfort

Engine (cc)	25.4
Weight (lbs.)	9.9 (4.5 kg)
Shaft Length (in.)	40.7
Fuel Capacity (fl. oz)	20.6 (601 ml)

PAS ATTACHMENTS

Pro Paddle[™]

- 10, 1.625 in. durable rubber fins
- 22.5 in sweeping swath
- · Useful for rocks, mulch, pine needles, pine cones, acorns and sand
- Length: 36.5 in. Weight: 11.2 lbs.
- Part#: 99944200620

Pro Sweep[™]

- 22.5 in. sweeping swath
- · Perfect for all surfaces including lawn, concrete and soil
- Length: 36 in. Weight: 11.2 lbs.
- Part#: 99944200553

Speed-Feed[®] 400 Trimmer

- 1.62:1 gear ratio
- Easy-loading Speed-Feed 400*
- Length: 34 in. Weight: 3 lbs.
- Part#: 99944200540

Pro-Torque™ Trimmer

- 2:1 high-torque gear ratio to power through
- tough overgrown grass and weeds
- ECHOmatic[™] trimmer head
- Length: 34 in. Weight: 3.2 lbs.
- Part#: 99944200545

Bed Redefiner

- Patented, replaceable 6-finger steel claw
- Adjustable support wheel
- Length: 34.8 in. Weight: 8.5 lbs. Part#: 99944200465

Curved Shaft Edger

- Pro-Torque[™] gear case
- Blade length: 7.75 in.
- · Length: 33 in. Weight: 5.6 lbs. Part#: 99944200470AB

Tiller/Cultivator

- 6.5 in tilling swath
- Heavy-duty gear box
- 42:1 gear reduction
- Length: 35 in. Weight: 4.6 lbs. Part#: 99944200513

Mid-Reach Hedge Trimmer

- 21 in. double-sided double-reciprocating RazorEdge* blades
- Length: 37.9 in. Weight: 3.63 lbs. Part#: 99944200640

3 ft. Extension

- Tool-less coupler attaches between the PAS powerhead and attachment
- Compatible with Power Pruner® and all hedge trimmer attachments
- · Length: 36 in. Weight: 2.6 lbs.
- Part#: 99944200536

Curved Shaft Trimmer

- Rapid Loader^{*} head
- Curved shaft for precise trimming
- Length: 33 in. Weight: 3.9 lbs.
- Part#: 99944200615

Brushcutter

- 1.62:1 gear ratio
- Includes 8 in. 80-tooth brush blade
- Length: 33 in. Weight: 2.62 lbs.
- Part#: 99944200601

Blower

- Solid drive shaft with 4-bearing support
- Direct-drive fan for efficient power transfer
- Length: 25 in. Weight: 3.9 lbs.
- Part#: 99944200490

Straight Shaft Edger

- Pro-Torque[™] gear case
- Blade length: 7.75 in.
- · Length: 33 in. Weight: 5.6 lbs.
- Part#: 99944200475

Power Pruner[®]

Heavy-duty gear case and automatic oiler

- Over 8 ft. of total reach
- Comes with a 10 in. bar and chain
- Length: 57 in. Weight: 4.8 lbs.
- Part#: 99944200532

Standard Hedge Trimmer

- 21 in. double-sided double-reciprocating RazorEdge[®] blades
- Length: 50.1 in. Weight: 4.13 lbs.
- Part#: 99944200486

Articulating Hedge Trimmer

- 10 blade positions with range of 135°
- 21 in. double-sided double-reciprocating RazorEdge[®] blades
- 64.4 in. length (extended), 46.3 in. length (storage position)
- Length: 64.4 in. Weight: 5.6 lbs. Part#: 99944200596











PRO ATTACHMENT SERIES™	PAS-225	PAS-225VPB	PAS-225SB	PAS-2620	DPAS-2100SB 56V	DPAS-2600SB 56V
Features and Benefits						
Tool-less air filter cover for easy access	•	•	•	•		
Commercial-grade felt air filtration for long engine life	•	•	•			
2-stage air filter for improved filtration and long engine life				•		
i-30" starting system for 30% starting effort reduction	•	•	•			
Digital ignition system provides Intelligent electronic programming for precise ignition timing at all operating speeds	•	•	•	•		
Purge bulb for easy starting	•	•	•	•		
Chrome cylinder increases engine life				•		
Ergonomic rubber grip throttle handle with overmolding for comfort and durability	•	•	•	•		
Heavy-duty vibration-reduction system for operator comfort	•	•	•	•		
Attachment Compatibility						
Curved Shaft Trimmer	•	•	•		•	•
Speed-Feed' Trimmer	•	•	•	•	•	•
Pro-Torque [™] Trimmer	•	•	•	•	•	•
Brushcutter	•	•	•	•	•	•
Bed Redefiner				•		•
Blower	•	•	•	•	•	•
Curved Shaft Edger	•	•	•	•	•	•
Straight Shaft Edger				•	•	•
Tiller/Cultivator	•	•	•	•	•	•
Hedge Trimmer	•	•	•	•	•	•
Mid-Reach Hedge Trimmer	•	•	•	•	•	•
180° Articulating Hedge Trimmer	•	•	•	•	•	•
3 ft. Extension	•	•	•	•	•	•
Power Pruner'	•	•	•	•	•	•
Pro Paddle™				•	•	•
Pro Sweep [™]				•	•	•

Fuel Capacity

14.2

14.2

14.2

20.6

Starting System

i-30™

i-30™

i-30™

Standard

Length* (in.)

40.7

40.7

40.7

40.7

Carb.

(w/Purge Pump)

Rotary

Rotary

Rotary

Rotary

Engine Disp. (cc)

21.2

21.2

21.2

25.4



SPECIFICATIONS Model

PAS-225

PAS-225VPB

PAS-225SB

PAS-2620

Power head only Dry Weight (lbs.)

9.3

9.3

9.3

9.9



ECHO's lineup of professional-grade spreaders features unrivaled performance. Each model features pro-style "T" handles for comfortable operation and metal augers to keep material from seeds, fertilizer, and herbicides to ice melt flowing. Maintenance-free gear cases and durable, over-sized hoppers help to increase productivity.

RB-85W ROCK SALT SPREADER

RB-60

SPREADER

87 🔐

For RB-60 only.

RB-85

BROADCAS

RB-85S

BROADCAS Spreader

😵 🚯

SPREADER

S 🚱

The RB-60 heavy-duty turf broadcast spreader features a 60 lb.-capacity hopper with a spread pattern up to 8 feet wide. Whether spreading seeds, fertilizer, pesticides or more, the RB-60 is a reliable tool for bringing lawns closer to perfection.

- Factory-calibrated spread pattern provides even, accurate coverage
- Maintenance-free gear case reduces maintenance time and costs
- Foot-operated side deflector keeps material out of unwanted areas

	Optional hoppercover
	for RB-60
1	Part#: G401000020

23 (10.4 kg)
10
60 (27.2 kg)
Powder-coated Steel

The RB-85 is a professional, turf broadcast-style spreader featuring a 13 in. diameter tires and a tough, corrosion-resistant powder-coated steel frame to support an oversized 85 lb.-capacity hopper.

- Includes hopper grate and cover
- Large-capacity hopper holds 1.54 cu. ft. of material
- Heavy-duty metal gears provide long-lasting durability
- Foot-operated side deflector keeps material out of unwanted areas
 Weight (lbs.) Tire Size (in.) Hopper Capacity (lbs.)

ut	Weight (lbs.)	35 (15.9 kg)
	Tire Size (in.)	13
	Hopper Capacity (lbs.)	85 (38.5 kg)
	Frame	Powder-coated Steel

The RB-85S features 13 in. diameter tires and a stainless steel frame that stands up to any sort of weather and use condition to support an oversized 85 lb.capacity hopper. A heavy-duty agitator breaks up clumps.

- Includes hopper grate and cover
- Large-capacity hopper holds 1.54 cu. ft. of material
- Heavy-duty metal gears provide long-lasting durability
- Foot-operated side deflector keeps material ou of unwanted areas

out				
	Weight (lbs.)	37 (16.8 kg)		
	Tire Size (in.)	13		
	Hopper Capacity (lbs.)	85 (38.5 kg)		
	Frame	Powder-coated Steel		

The ECHO RB-85W Broadcast Spreader is a winter model for spreading salt, featuring a stainless-steel frame, salt-specific hopper and agitator, along with a 4-sided deflector.

- Includes hopper grate and cover
- Large 1.5 cu. ft. hopper holds up to 85 lbs. of material
- Spiked stage agitator allows large material to flow freely
- Adjustable deflectors create
- spread pattern from 2' 8'

Weight (lbs.)	38.5 (17.5 kg)
Tire Size (in.)	13
Hopper Capacity (lbs.)	85 (38.5 kg)
Frame	Powder-coated Steel



PRESSURE WASHERS

Whether you're a professional wanting to quickly clean dirty equipment, or add to your available services, or a homeowner looking to clean your deck or siding, ECHO's line of pressure washers will satisfy a wide range of needs. Make clean up fast, easy and fun to do and see immediate results watching dirt and grime get flushed away. Each model is designed to be durable and cost-effective while providing maximum productivity and convenience.



With variable cleaning force up to 1,800 PSI, the PWE-1800 provides the versatility to clean decks, sidewalks, driveways, windows, bricks, siding, car wheels and more.

- Uses 80% less water than a standard garden hose
- High quality electric motor for extended use
- Integrated hose wheel for hose storage
- Variable pressure spray & turbo nozzles to handle a variety of needs

Power Type	13 AMP Electric
Max. PSI	1,800
Weight (lbs.)	30 (13.6 kg)
Max. Gallons Per Min.	1.3 (4.9 L/Min)
Pump	Axial Cam
Hose Length (ft.)	20

Delivering up to 3,100 PSI of cleaning power to effortlessly remove years of stubborn buildup. It's ideal for rejuvenating decks, patios, sidewalks and driveways and cleaning the exteriors of homes and automobiles.

- Easy start axial cam pump system
- 4-stroke engine provides quiet
 operation
- Two-stage air filtration dramatically increases cleaning capability and allows for longer maintenance intervals
- Reversible handle for easy storage

Engine (cc)	212
Max. PSI	3,100
Weight (lbs.)	80 (36 kg)
Max. Gallons Per Min.	2.5)9.5 L/Min)
Pump	Axial Cam
Hose Length (ft.)	25
Number Of Nozzles	4



The PW-4200 pressure washer delivers up to 4,200 PSI to power through the toughest jobs. Whether removing stubborn deposits from work tools and equipment or erasing years of buildup from decks or brick siding, the PW-4200 is up to the task.

- AR Triplex pump provides maximum strength
- and greater durabilityHonda[®] GX390 engine for ultimate
- durability
- Pro-style wand with auxiliary handle Heavy-duty hose withstands the ele-
- ments
- Reversible handle for easy storage

Engine (cc)	212
Max. PSI	4,200
Weight (lbs.)	145 (65.8 kg)
Max. Gallons Per Min.	4 (15.1 L/Min)
Pump	Triplex
Hose Length (ft.)	50
Number Of Nozzles	4





UNIVERSAL PRESSURE WASHER ACCESSORIES

Fits most gas powered pressure washers up to 3600 PSI.

24 in. Spray Wand Part#: 99944100702



35 ft. Pressure Washer Hose Part#: 99944100700

15 in. Surface Cleaner Part#: 99944100708





2nd Story Nozzle Kit

Includes second story soap and rinse nozzle. Part#: 99944100706

Quick Connect Coupler Kit Part#: 99944100707



Spray Gun Part#: 99944100701



PRESSURE WASHERS	PWE-1800	PW-3100	PW-4200
Features and Benefits			
Variable pressure spray and turbo nozzles included	•		
Uses 80% less water than a standard garden hose	•		
Convenient on-board detergent tank included	•	•	
Detergent Injection System			•
Auto on/off pump for prolonged durability	•		
Flat-free tires for easy transport	•	•	•
Reversible handles for compact storage		•	•
On-board storage for nozzles, hose and wand	•	•	•
Pro wand with auxiliary handle for comfort			
Powered by Honda GX390 engine			•
AR brand triplex pump			•
Wand, hose and nozzle quick connect coupler		•	•

SPECIFICATIONS

Model	Pressure Rating (PSI)	Flow Rate (GPM)	Pump	Hose Length (ft.)	Wheel Size (in.)	Unit Weight (lbs.)
PWE-1800	1800	1.3	Axial	20	5.5	30
PW-3100	3100	2.5	Axial	25	12	80
PW-4200	4200	4.0	Triplex	50	12	145



5-in-1 Nozzle

Part#: 99944100705

Turbo Nozzle Part#: 99944100704



Spray Tips (5 piece) Part#: 99944100703



WHEELED TRIMMERS

When dealing with trimming larger areas where a traditional lawn mower is not an option, ECHO's wheeled trimmers can handle the job. They have the power to cut through dense grass and weeds with 5x the power of a handheld trimmer, and their maneuverability make them a great solution in places a mower just can't go – along raised flowerbeds, retaining walls, fences and trees. Each trimmer is equipped with .155 in. diameter ECHO Cross-Fire® trimmer line so it will make quick work of even the thickest grass and weeds.

WT-1610 CO WHEELED TRIMMER

When the job calls for heavy trims along tences, rocks, retaining walls and other obstacles, the WT-1610 wheeled trimmer features a 24 in. cutting swath and is able to pivot up to 7.5° to deliver confident cuts that extend beyond the wheel base.

- · Easy-start Briggs & Stratton" OHV engine
- Large 16 in. wheels for easy maneuverability
- Folding ergonomic handle design
- Removable nose piece for easy belt inspection

Engine (cc)	163
Weight (lbs.)	78 (35.4 kg)
Fuel Capacity (fl. oz.)	25 (739 ml)
Trimmer Type	Walk behind/push
Cutting Swath (in.)	24
Standard Line Dia. (in.)	.155

WT-1610T (*) Wheeled trimmer

The WT-1610T tilt wheeled trimmer meets the needs of tough jobsites. With two adjustable cutting heights and three adjustable tilt settings from 5° to 13°, it can plow through an overgrown lot one minute, then carefully shape around trees and fences the next.

- Easy-start Briggs & Stratton[®] OHV engine
- Large 16 in. wheels for easy maneuverability
- Folding ergonomic handle design
- Tilt-n-trim feature allows the operator to efficiently cut hard to reach areas as well as around and under obstructions

Engine (cc)	160
Weight (lbs.)	84 (38.1 kg)
Fuel Capacity (fl. oz.)	25 (739 ml)
Trimmer Type	Walk behind/push
Cutting Swath (in.)	24
Standard Line Dia. (in.)	.155

WT-1610SP (*) WHEELED TRIMMER

With 5x the power of a handheld trimmer, the self-propelled WT-1610SP wheeled trimmer bullies any brush that stands in its way. Featuring 16 in. wheels, a 24 in. cutting swath and three variable speeds up to 2 MPH, it makes light work of thick, overgrown lots.

- Easy-start Briggs & Stratton[®] OHV engine
- Large 16 in. wheels for easy maneuverability
- Folding ergonomic handle design
- Self-propelled feature allows for easier maneuverability over rough terrain

Engine (cc)	163
Weight (lbs.)	97 (44 kg)
Fuel Capacity (fl. oz.)	25 (739 ml)
Trimmer Type	3 speed self-propelled
Cutting Swath (in.)	24
Standard Line Dia. (in.)	.155

WHEELED TRIMMER Accessories



Pro-line Trimmer Head

• WT-1610, WT-1610T, WT-1610HSP, WT-1610SP Part#: 99944400000



No Spark Mow Ball • WT-1610, WT-1610T, WT-1610HSP, WT-1610SP Part#: 99944400001



FIRE PUMP

Be prepared for an emergency with ECHO's FP-2126 fire pump. This property-saver uses an existing water source, like a swimming pool or a pond, and can pump water where it's needed. The oversized 5-spoke wheels allow easy movement across uneven terrain. The durable tube steel frame provides the pump and engine with maximum protection and safe operation.

FP-2126 ®

With a reliable engine and portable power able to reach a second story, the FP-2126 fire pump helps control fires until firefighters arrive. It diverts water from nearby streams, ponds, pools or shallow wells to buy valuable time when a fire breaks out in buildings, brush or wooded areas.

- Complete firefighting kit with easy to transport cart
- Honda[®] GX200 engine
- 2 in. high-pressure water pump
- Includes 12 ft. suction hose and 50ft. discharge hose

Engine (cc)	196	
Weight (lbs.)	130 (59 kg)	
Fuel Capacity (fl. oz.)	104 (3.1 L)	Tear
Max. Pressure (PSI)	85	Cons
Max Flow (GPM)	126 (477L/min)	year
Max. Suction Lift (ft.)	26	Warr



WHEELED TRIMMER LINE

Cross-Fire [®] : Multi-Sided						
	50	Count	Larg	e Clam	Mediu	m Spool
Line dia. (in.)	Length (in.)	Part #	Length (ft.)	Part #	Length (ft.)	Part #
.155	21	102225155	126	311155066	378	314155056
.175	21	102225175	75	311175067	267	314175057

CHIPPER/SHREDDERS

A chipper/shredder is an extremely useful machine for reducing yard debris, like downed limbs or fallen leaves, into beneficial mulch. Two reversible chipping blades and eight reversible shredding knives quickly pulverize your yard debris into 3/4 in. pieces with the medium debris screen in place. Commercial landscapers can add chipping and shredding services to their customers for added value, while homeowners can save time and money by reusing the mulch to hold back weed growth and retain water around shrubs or flowers or to protect perennial plants over the winter.



The SC-2013 is a user-friendly chipper/shredder, capable of reducing debris and tree branches from up to 3in.-thick down to 3/4 in. pieces that are perfect for refreshing the landscaping. Available with four heavy-duty screens to choose your chip size.

- Easy-start Briggs & Stratton[®] OHV engine
- Flat-free tires for easy transportation
- Reversible, heat-treated chipping and shredding blades
- Includes coarse debris screen. Other discharge screens available

Engine (cc)	208
Weight (lbs.)	195 (88.5 kg)
Fuel Capacity (fl. oz.)	100 (3L)
Chipper Capacity (in.)	3
Shredder Capacity (in.)	3/4
Shredder Blades	8

SC-3013 CO CHIPPER/SHREDDER

The SC-3013 chipper/shredder is loaded with professional power and user-friendly features to plow through tough jobs quickly. With four heavy-duty screens available, it takes debris and tree branches up to 3in.-thick and reduces it to pieces as small as 3/4 in.

MECHO

SC-3013

- Easy-start Briggs & Stratton" OHV engine
- Flat-free tires for easy transportation
- Reversible, heat-treated chipping and shredding blades
- Includes coarse debris screen. Other discharge screens available

Engine (cc)	306
Weight (lbs.)	228 (103.4 kg)
Fuel Capacity (fl. oz.)	100 (3L)
Chipper Capacity (in.)	3
Shredder Capacity (in.)	3/4
Shredder Blades	12

SC-4213 CO CHIPPER/SHREDDER

ILER!T

SC-2013

The professionally powerful SC-4213 eats debris and tree branches up to 3in.-thick and spits out $\frac{3}{4}$ in. chips that can be easily hauled away or used to refresh the landscaping.

EFHT

SC-4213

- Easy-start Briggs & Stratton" OHV engine
- Flat-free tires for easy transportation
- Reversible, heat-treated chipping and shredding blades
- Includes coarse debris screen. Other discharge screens available

Engine (cc)	420
Weight (lbs.)	263 (119.2 kg)
Fuel Capacity (fl. oz.)	223 (6.6 L)
Chipper Capacity (in.)	3
Shredder Capacity (in.)	3/4
Shredder Blades	12

CHIPPER/SHREDDER ACCESSORIES



Debris Screens

3 in. Fine Screen Part#: 99944300000 - SC-3013/SC-4213 Part#: 99944300004 - SC-2013

3 in. Medium Screen Part#: 99944300001 - SC-3013/SC-4213 Part#: 99944300005 - SC-2013

3 in. Coarse Screen Part#: 99944300002 - SC-3013/SC-4213 Part#: 99944300006 - SC-2013

3 in. Wet Debris Screen Part#: 99944300003 - SC-3013/SC-4213 Part#: 99944300007 - SC-2013



Shredder Knives Kit • SC-3013, SC-4213 Part#: 99944300014



Shredder Knives Kit • SC-2013 Part#: 99944300015



All-Weather Cover • SC-2013, SC-3013, SC-4213 Part#: 99944300008



Leaf Tamper • SC-2013, SC-3013, SC-4213 Part#: 99944300009



Two-Wheel Tow Kit

• SC-2013, SC-3013, SC-4213 Part#: 99944300010



3 in. Discharge Debris Bag

• SC-2013, SC-3013, SC-4213 Part#: 99944300011



Blower Attachment

• SC-3013, SC-4213
Part#: 99944300012



Chipper Blade Kit • SC-2013, SC-3013, SC-4213 Part#: 99944300013



SPRAYERS

ECHO Sprayers, available in both handheld and backpack styles, are lightweight and easy to use. The entire backpack sprayer lineup features lightweight tanks with UV inhibitors, ergonomic pump handles, 21 in. wands with a variety of nozzles and pumps with chemically resistant seals, in-wand filtration systems and fold-away handles for easy storage.

MS-2310H **2-GALLON SPRAYER**



MS-4010BP 4-GALLON BACKPACK SPRAYER

MS-4010BPD 4-GALLON BACKPACK

DIAPHRAGM SPRAYER



The MS-2310H offers a convenient, lightweight design with a wide mouth opening for easy filling and cleaning. With a high-capacity, professionalgrade pump, and fiberglass wand it's ideal for cleaning, sanitizing, and applying harsh chemicals for either indoor or outdoor applications.

- 2-gallon tank with wide mouth opening for easy filling and cleaning
- High-capacity, professional-grade pump
- Professional-grade 21 in.
- fiberglass wand Includes adjustable, flat fan, hollow cone and jet stream nozzles

Tank Capacity (gal.)	2 (7.6 L)
Weight (lbs.)	5 (2.3 kg)
Pressure Rating (PSI)	45
Tank Opening (in.)	4.5

The MS-4010BP has a piston style pump that makes pressurization fast and easy, reducing user fatigue. It features a 4-gallon professional-grade tank and a 50-in. heavy-duty, nylon-reinforced hose, making it ideal for use in either turf or agricultural applications.

- 4-gallon tank with wide mouth opening for easy filling and cleaning
- 50 in. heavy-duty, nylon-reinforced hose
- Professional-grade 21 in. fiberglass wand with 50 in. nylon-re-Tank Capacity (gal.) 4 (15.1 L) inforced hose Weight (lbs.) 9.5 (4.3 kg) • Includes adjustable, flat fan, Pressure Rating (PSI) 90 hollow cone and jet stream nozzles Tank Opening (in.) 5.5

The ECHO MS-4010BPD 4-gallon Backpack Manual Sprayer features a diaphragm pump that can be used with liquids and many wettable powders. Its premium quality, professional-grade, heavy-duty design is built to withstand the most demanding work conditions.

4-gallon tank with wide mouth opening for easy filling and cleaning

- Professional-grade 21 in. fiberglass wand
- 50 in. heavy-duty, nylo reinforced hose Includes adjustable, fla hollow cone and jet st nozzles

on-		
	Tank Capacity (gal.)	4 (15.1 L)
at fan, cream	Weight (lbs.)	11 (5kg)
	Pressure Rating (PSI)	90
	Tank Opening (in.)	5.5

The ECHO MS-5010BP is a premium quality, professional-grade, heavy-duty Backpack Manual Sprayer. Built for heavy day-to-day use, it provides a large capacity 5-gallon tank for extended operations, and can either be used for turf or agricultural applications to spray herbicides, fertilizers, and more.

- 5-gallon tank with wide mouth opening for easy filling and cleaning
- Heavy-duty padded straps with waist belt
- Professional-grade 21 in. fiberglass wand with 50 in. nylonreinforced hose
- Includes adjustable, flat fan, hollow cone and jet stream nozzles

Tank Capacity (gal.)	5 (19L)
Weight (lbs.)	13.1 (5.9 kg)
Pressure Rating (PSI)	90
Tank Opening (in.)	5.5

MS-5010BP 5-GALLON BACKPACK SPRAYFR

SPRAYER ACCESSORIES

26 in. Brass Wand Part#: 99944100240



39 in. Fiberglass Spray Wand

Part#: 99944100410



Shoulder Strap

Fits MS-2310H Part#: 99944100315

Adjustable Brass Spray Nozzle

Part#: 99944100340



Spot Spraying Shield with Nozzle


• Protects plants and flowers from overspray Part#: 99944100080



SPRAYERS	MS-2310H	MS-4010BP	MS-4010BPD	MS-5010BP
Features and Benefits				
Tank with UV inhibitors for long life	•	•	•	•
Tank marked in both gallons and liters for convenience	•	•	•	•
Ergonomic pump handle for comfortable operation	•	•	•	•
Piston-style pump for efficient operation	•	•		•
Filtration system for longer pump life	•	•	•	•
Chemically resistant seals for increased durability	•	•	•	•
Pressure-relief valve for convenient operation	•			
Diaphragm pump designed for use with wettable powders and liquids			•	

SPECIFICATIONS

Model	Туре	Capacity (gal.)	Max. Pressure Rating (PSI)	Weight (lbs.)
MS-2310H	Handheld	2	45	5
MS-4010BP	Backpack	4	90	9.5
MS-4010BPD	Backpack	4	90	11
MS-5010BP	Backpack	5	90	13.1

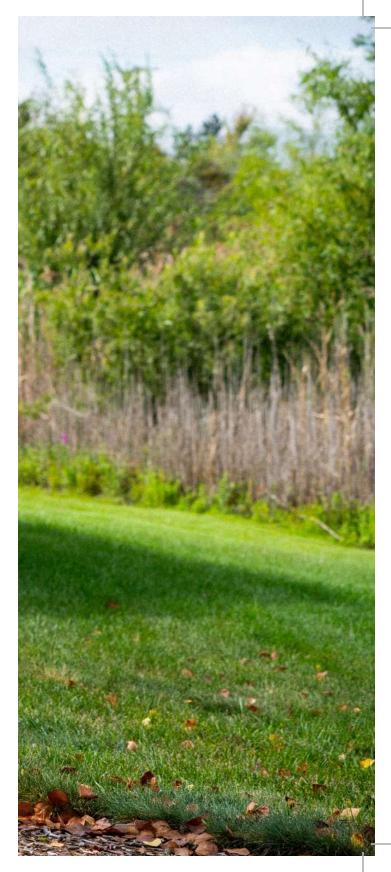



INVERTERS

ECHO's range of generators and inverter/generators provide the ultimate combination of technology and output to deliver power with peace of mind, when and where you need it. Each model is packed with convenient features that help provide guiet, easy-to-use power. Whether you're tailgating, RVing, powering household appliances during an outage, or providing power to a job where access to electricity is limited, you can count on ECHO's portable power generation solutions to keep you up and running.

EGi-1200 🙃 **INVERTER/GENERATOR**



The EGi-1200 generator/inverter is made to provide power on the go. Its lightweight design and quiet, efficient operation make it an ideal choice for recreational power, like at campsites, tailgates or wherever else you need to energize the outdoors.

- Ultra-quiet operation compared to conventional generators
- Auto-idle fuel-saving technology
- Computer controlled power output to safely charge electronics
- Parallel capable

Engine (cc)	60
Max. Wattage (W)	1,200
Weight (lbs.)	30 (13.6 kg)
Max. Amp (A)	9
USB Ports	2
Fuel Capacity (gal.)	0.69 (20ml)
Run Time	5.2 hours @ 50% Load

EG-3500 🕹 **CONVENTIONAL/GENERATOR**



The EG-3500 generator combines professional features with user-friendly accessibility to power a wide range of needs. Whether you need power on the campsite, the jobsite or backup power for minor home emergencies, it simply gets the job done.

- Automatic voltage regulator to maintain constant voltage & power
- Covered outlets protect unit while storing
- · Includes fuel gauge and low oil shut down
- Circuit breaker protection

Engine (cc)	212
Max. Wattage (W)	3,500
Weight (lbs.)	110 (49.9 kg)
Max. Amp (A)	29
Fuel Capacity (gal.)	4
Run Time	10 hours @ 50% Load

EGi-3600LN @ 👁 🟵 **INVERTER/GENERATOR**



This low-noise generator/inverter produces ample power without the hassles associated with some generators. With ultra-quiet operation, pushbutton electric starts, and auto-idle fuel efficiency, it's an ideal solution for emergency home power or portable off-grid power.

- Easy electric start with recoil back up
- Auto-idle fuel-saving technology
- LED control panel displays fuel level and power usage
- Parallel capable

Engine (cc)	212
Max. Wattage (W)	3,600
Weight (lbs.)	107 (48.5 kg)
Max. Amp (A)	30
USB Ports	2
Fuel Capacity (gal.)	2.2 (65 ml)
Run Time	8.5 hours @ 50% Load

GENERATOR ACCESSORIES

DC Charge Cables

Designed to charge 12-volt DC batteries for automotive and recreational vehicles. Part#: 99988804000 - EGi-1200, EGi-3600LN





EG-10000 © © CONVENTIONAL/GENERATOR

The EG-10000 generator runs quietly and is capable of efficiently producing 10,000 watts, enough to power large loads like jobsites, multiple home appliances and food trucks. An automatic voltage regulator also maintains constant power.

- Automatic voltage regulator to maintain constant voltage & power
- Easy electric start with recoil back up
- Digital multimeter for easy access to critical information
- Includes fuel gauge and low oil shut down

Engine (cc)	420
Max. Wattage (W)	10,000
Weight (lbs.)	212 (96.2 kg)
Max. Amp (A)	33
Fuel Capacity (gal.)	6.6
Run Time	8 hours @ 50% Load

Parallel Kit

Combine the power output of (2) inverter generators. Part#: 99988804001 - EGi-1200, EGi-3600LN Part#: 99988804002 - EGi-2300



GENERATORS	EGi-1200	EGi-3600LN	EG-3500	EG-10000
Features and Benefits				
Ultra-quiet operation	•	•		
Auto-idle saves fuel	•	•		•
Convenient carrying handle	•			
Parallel kit capable	•	•		
Compact ergonomic frame			•	•
Folding handle and easy rolling flat-free tires		•	•	•
Covered outlets and circuit breaker protection			•	•
Low oil shutdown	•	•	•	•
Electric start with recoil back-up		•		•
3-in-1 digital meter displays voltage		•		•
Includes fuel gauge & low oil indicator		•	•	•
On-board displays fuel level, runtime & load level		•		

SPECIFICATIONS

Model	Running Watts	Max Watts	Rated Amps	120V Duplex	120V Twistlock	240V 30 AMP Twistlock	USB Outlets	Fuel Tank Capacity	Run Time @ 50% Load	dB(A) Levels at 23 ft. (7M)	Unit Weight (Ibs.)
EGi-1200	1000W	1200W	8.3	1	-	-	2	0.69 gal. 2.6 L	5.2	57 dB(A) @ 25% load	30
EGi-3600LN	3000W	3600W	30	1	1	-	2	2.2 gal.	8.5	63 dB(A) @ 25% load	107
EG-3500	2800W	3500W	29	2	1	-	-	4 gal. 15.1 L	10	72 dB(A) @ full load	110
EG-10000	7500W	10000W	33	2	1	1	-	6.6 gal. 25 L	8	84 dB(A) @ full load	212

DRILL/AUGER/CULTIVATOR





With high-torque performance, easy starting, ergonomic features and any-angle operation, the professional-grade EDR-260 engine drill is built for all-day productivity. It performs how you need, where you need, as long as you need.

- All-position diaphragm carburetor, with purge pump, allows operation at any angle
- Heavy-duty high-torque gear case for maximum drilling performance
- Convenient reverse function
- Heavy-duty keyed chuck holds up to 1/2 in. drill shank

Engine (cc)	25.4
Weight (lbs.)	10.7 (4.9 kg)
Fuel Capacity (fl. oz.)	14 (414 ml)
RPM	0-650 Forward/Reverse
Torque (lbs. ft.)	12
Gear Reduction Ratio	17.1:1
Chuck Dia. (in.)	1/2 Std

EA-410 ® EARTH/ICE AUGER

The high-torque EA-410 earth/ice auger powers through tough jobs like compacted dirt, clay, frozen earth and ice in seconds. With easy starts, a heavy-duty construction and reduced vibration, it is made to last.

- Designed for a wide variety of auger diameters and lengths
- Heavy-duty handle and frame allows for single or two-person operation
- Designed for either 1- or 2-person operation
- High-torque gear case for superior performance

Engine (cc)	42.7
Weight (lbs.)	21.6 (9.8 kg)
Fuel Capacity (fl. oz.)	33.8 (1 L)
RPM	348
Torque (lbs. ft.)	48.9
Gear Reduction Ratio	30.2:1

TC-210 CO TILLER/CULTIVATOR

Turn tough dirt into a welcoming bed for flowers, veggies and more. The TC-210 tiller/cultivator is compact and lightweight, but still packs the heavyweight punch you'd expect from a piece of ECHO outdoor power equipment.

- Four 9-inch-diameter, 10-tooth, reversible, hardened-steel tines
- 42:1 reduction worm gear-type transmission
- Kickstand for easy storage
- Water resistant stop switch and throttle control located at operator's fingertips

Engine (cc)	21.2
Weight (lbs.)	20 (9.1 kg)
Fuel Capacity (fl. oz.)	16.9 (500 ml)
Furrow Width (in.)	9
Number of Tines	9

TILLER/AUGER ACCESSORIES

Tiller/Cultivator Kickstand Replacement

• TC-210 Part#: 99988800900



Earth Augers

All ECHO augers have a 7/8 in. diameter shaft opening. The 6 in., 8 in. and 10 in. augers feature a flex coil design to absorb ground shock while slowing impact between blade and rock for better handling and operation.

Diameter (in.)	Length (in.)	Weight (lbs.)	Part #
2	36	5.8	99944900150
3	36	6.5	99944900160
4	36	7.5	99944900170
6	34	12	99944900180
8	34	15	99944900190
10	34	18	99944900200

Extension Shafts

ECHO extension shafts are compatible with 3 in. - 10 in. diameter earth augers. Not for use with 12 in. diameter or larger earth augers.

Diameter (in.)	Length (in.)	Part #	
7/8	12	99944900220	
7/8	18	99944900210	
Earth Auger Adapter with Spring		Part #	
Converts 7/8 in to 1 in diameter		99944900335	

Earth Auger Blades & Points

Description	Part #
4 inch auger	99944900230
6 inch auger	99944900240
8 inch auger	99944900250
10 inch auger	99944900260
Auger Replacement Point	99944900270

Ice Auger Replacement Blades & Points

Description	Part #
Replacement blade for 8 in. auger	99944900300
Replacement blade for 10 in. auger	99944900310
Ice Auger Point	99944900275

SPECIFICATIONS

Model	Engine Disp. (cc)	Gear Reduction Ratio	Drill Speed (RPM)	Torque (ftlbs.)	Chuck Diameter 1/2 in.	Fuel Cap. (fl. oz.)	Dry Weight (lbs.)
EDR-260	25.4	17.1:1	0-650 forward/reverse	12	standard	14	10.7
Model	Engine Disp. (cc)	Carburetor	Max Torque at Engine	Max Torque at Auger	Fuel Cap. (fl. oz.)	Auger RPM	Dry Weight* (lbs.)
EA-410	42.7	Diaphragm w/ Purge Pump	1.62 ftlbs. (2.2 Nm)	48.97 ftlbs. (66.4 Nm)	33.8	348	21.6
Model	Engine Disp. (cc)	Carburetor	Fuel Cap. (fl. oz.)	Dry Weight (lbs.)			
TC-210	21.2	Diaphragm w/ Purge Pump	16.9	20			

Dual-Blade Ice Augers

ECHO ice augers feature a centering ring to re-drill old holes. Unique coil technology slows the impact between blade, ice, or other debris.

Diameter (ir	n.) Length	(in.) Part #
8	40	99944900280
10	40	99944900290

ENGINE DRILL ACCESSORIES

Description	Part #
2.5 in. dia. Bulb/Plant Auger (24 in. L)	99944900011
3 in. dia. Bulb/Plant Auger (24 in. L)	99944900021
3 in. dia. Heavy-duty Auger (18 in. L)	99944900061
7 in. dia. Gallon Pot Auger (12 in. L)	99944900070
Keyless Chuck	99944900320

HAND TOOLS

ECHO's hand tools are the perfect complement for any yard task. Their ergonomic design will make pruning, lopping, or chopping a breeze. Quality materials like high-carbon steel or stainless steel blades and low-moisture, end-grain hickory wood handles ensure you're getting a professionalgrade tool.





The HP-42 precision hand snips feature a durable, ergonomic design for performing essential pruning on plants, herbs and flowers.

- Double-beveled tapered tips for fine pruning
- Stainless steel blades resist corrosion
- Heavy-duty spring reduces hand fatigue
- Easy-to-close blade locking clasp for right- or left-handed use

Cutting Capacity (in.)	Up to 1/2
Blade Type	Stainless Steel
Handle Grip	Non-slip Rubber Grip





The HP-44 bypass pruners feature an adjustable grip to match the hand size of the user and ensure comfortable cutting all day long.

- High carbon steel for superior blade durability
- Lightweight shock-absorbing handles with rubber overmolded grip
- Low friction, coated blades

Cutting Capacity (in.)	Up to 1
Blade Type	High Carbon Steel
Handle Grip	Rubber Overmold

HP-43 Bypass pruner



The HP-43 bypass pruners incorporate gear-driven technology to multiply cutting force by 3x over conventional pruners.

- Double-beveled tapered tips for fine pruning
- Stainless steel blades resist corrosion
- Heavy-duty spring reduces hand fatigue
- Low-friction, coated blades

Cutting Capacity (in.)	Up to 5/8
Blade Type	High Carbon Steel
Handle Grip	Rubber Overmold





Pro Series bypass pruners feature contoured handles to better match the shape of the user's hand, providing the comfort and cutting performance needed for all-day jobs.

- High carbon steel for superior blade durability
- Lightweight shock-absorbing handles with rubber overmolded grip
- Low friction, coated blades

Cutting Capacity (in.)	Up to 1
Blade Type	High Carbon Steel
Handle Grip	Ergonomic





Levered gear technology triples the cutting power compared to standard loppers, while coated blades reduce friction for smooth cuts and maximum productivity.

- High carbon steel for superior blade durability
- Gear technology reduces cutting effort
- Low friction, coated blades prevent corrosion, while providing
 smooth cuts with heavy-duty aluminum alloy handles

Cutting Capacity (in.)	2.25
Blade Type	High Carbon Content
Blade Length (in.)	3.5
Overall Length (in.)	32.5





Lightweight construction and a levered gear that requires 3x less effort than standard loppers, the HA-2720 powers through tough jobs and long days with ease.

- High carbon steel for superior blade durability
- Gear technology reduces cutting effort
- Low friction, coated blades prevent corrosion, while providing smooth cuts with heavy-duty aluminum alloy handles

Cutting Capacity (in.)	2.25
Blade Type	High Carbon Content
Blade Length (in.)	3.5
Overall Length (in.)	32.5





With a wave blade design and geared lever technology that reduces effort when powering through thick cuts, the HA-2910 is a reliable hand tool that delivers powerful results.

- High carbon steel for superior blade durability
- Gear technology reduces cutting effort
- · Low friction, coated blades prevent corrosion, while providing smooth cuts with heavy-duty aluminum alloy handles

Cutting Capacity (in.)	375
Blade Type	High Carbon Content
Blade Length (in.)	9
Overall Length (in.)	26





The HA-1142 hatchet is designed with user-friendly features and a sharp, durable blade to ensure quality cuts without added effort.

- Hardened and tempered cutting edge for superior strength
- Ergonomic fawn foot handle design
- Blade shape enables deepest cuts and reduces binding

Weight (lbs.)	2 (0.9 kg)
Blade Type	High Carbon Content
Handle Length (in.)	14
Handle Material	Low-moisture Hickory



The HA-1363 felling axe perfectly balances a 3.5 lb. factory-sharpened steel blade with an ergonomic 36 in. hickory handle to deliver deep, smooth cuts with reduced binding.

- Hardened and tempered cutting edge for superior strength
- Ergonomic fawn foot handle design
- Blade shape enables deepest cuts and reduces binding

Weight (lbs.)	3.5 (1.6 kg)
Blade Type	High Carbon Content
Handle Length (in.)	36
Handle Material	Low-moisture Hickory





The 5-lb. HA-1005 splitting wedge helps to split large pieces of wood faster than a maul alone. Fully sharpened with a tapered cutting edge, it stacks productivity while reducing extra effort.

- Sharpened and ready for use
- Tapered cutting edge for efficient splitting
- · Striking face is intended for driving splitting wedge
- 60 degree bevel head maximizes force and splitting capability

Weight (lbs.) 5 (2.3 kg)



The HA-1282 limbing axe features a 2.25 lb. tempered cutting edge on the business end of an ergonomic 28 in. hickory handle.

- Hardened and tempered cutting edge for superior strength
- Ergonomic fawn foot handle design
- Blade shape enables deepest cuts and reduces binding

Weight (lbs.)	2.25 (1 kg)
Blade Type	High Carbon Content
Handle Length (in.)	28
Handle Material	Low-moisture Hickory



١

The HA-1366 splitting maul turns tough logs into valuable firewood without added effort. The 6 lb. blade features a tempered, factory-sharpened cutting edge, and the low-moisture, mechanically bonded 36 in. hickory handle reliably delivers stacks season after season.

- Hardened and tempered cutting edge for superior strength
- Ergonomic fawn foot handle design
- Blade shape enables deepest cuts and reduces binding

Weight (lbs.)	6 (2.7 kg)
Blade Type	High Carbon Content
Handle Length (in.)	36
Handle Material	Low-moisture Hickory

ACCESSORIES

Landscape Gloves

Flexible nylon with form-fitting fingers and hook and loop wrist closure for a secure fit.

Part #: 103942194 (M) Part #: 103942196 (L) Part #: 103942197 (XL)



Vibration-reducing Landscape Gloves

Premium, padded leather palm to reduce vibration, form-fitting fingers, and hook and loop wrist closure for a secure fit. Part #: 103942195 (M) Part #: 103942198 (L) Part #: 103942199 (XL)



Heavy-duty Work Gloves

Features leather palms and fingers to offer durability and protection against most elements and sharp objects. One size fits most. Part #: 103942074



Red Armor[®] Blade Cleaner And Lubricant

Get rid of what's collected along your blade. Our exclusive formula reduces friction, prevents corrosion, and promotes post-trimming plant health. Part#: 4550012 - 12 fl. oz. (355 ml) bottle



MIEGHU

GALLON HO

12.8 FL OZ (384.34 ML)

RED ARMOR[®]

continue to expand.

Red Armor[®] is first and foremost about the user. Users

who buy ECHO need to be rewarded with what they need

most: Performance. The Red Armor family is designed

exclusively for ECHO to deliver the ultimate performance

for your outdoor power equipment. These best-in-class

solutions offer a wide array of outdoor applications and



ECHO Red Armor Oil is a premium 2-stroke semi-synthetic engine oil formulated with powerful detergents and antioxidants to clean existing deposits, protect against future carbon build-up and promote longer engine life. With unique fuel stabilizers blended in, fuel stays fresh up to 2 years in a properly sealed container. JASO FD registered and ISO-L-EGD compliant. Red Armor cleans and protects to ensure optimum engine performance, and prolonged engine life.

Part #: 6550001	2.6 fl. oz. (77 ml)	(8) 6 pks.	1 gallon mix (22.7 L)
Part #: 6550025	6.4 fl. oz. (189 ml)	(8) 6 pks.	2.5 gallon mix (9.5 L)
Part #: 6550005	12.8 fl. oz. (379 ml)	12 per case	5 gallon mix (19 L)
Part #: 6550050	1 gallon (3.8 L)	4 per case	50 gallon mix (189 L)
Part #: 6550250	5 gallons (19 L)	1 pail	250 gallon mix (946 L)

Red Armor[®] 4-Stroke Oil

Red Armor full-synthetic 4-stroke oil is designed to provide maximum protection under all operating conditions. SAE 5W-30. Meets API Service SP, SN Plus standards.

Part #: 6554032

32 fl. oz. (946 ml) bottle (12 per case)

Red Armor® Fuel Treatment

Keep fuel fresh for up to two years with our unique fuel treatment. With a blend of antioxidants, detergents and an alcohol-free formula, our Red Armor Fuel Treatment works with both 2-stroke and 4-stroke engines for day-to-day use or extended storage.

Part #: 7550001

1 fl. oz. (30 ml) 24 piece sample pack (treats 2.5 gallons)

Part #: 7550012

12 fl. oz. (355 ml) bottle (6 per case)

Red Armor[®] Blade Cleaner and Lubricant

Quickly boost cutting performance by getting rid of what's collected along your blades. Our exclusive formula reduces friction, prevents corrosion, and promotes post-trimming plant health.

Part #: 4550012

12 fl. oz. (379 fl) bottle (6 per case)

"COMPETITOR B" OIL



ENGINE FAILURE



(N) 75 HOURS 1% BLOCKAGE

KEEPS ENGINE CLEANER LONGER



Red Armor® Lubricant

This lithium-based grease is water-resistant and seals out moisture, giving you long-lasting protection. It is ideal for gear cases, spindles, cables, and ball bearings.



8 fl. oz. tube (237 ml) (48 per case)

14 fl. oz. (414 ml) cartridge (36 per case)

Grease gun for 8 fl. oz. (237 ml) tube

Red Armor®

Hand Scrub Dirt-powered, water-

activated, and free of harsh

chemicals. Easily scrub

away grease and grime!

Part #

Part #

Part #

Part #



#: 3550000	0.2 fl. oz. (6 ml) (50 piece sample pack)
#: 3550002	2.5 fl. oz. (74 ml) tube (20 per case)
#: 3550008	8 fl. oz. (237 ml) tube (12 per case)
#: 3550064	64 fl. oz. (1.9 L) pump bottl (2 per case)



Maintain fuel quality and enhance engine performance with our PowerBlend[®] Gold Oil.

- For 2-stroke engines
- Semi-synthetic blend with fuel stabilizers
- Low-smoke emissions formula
- JASO FD registered and ISO-L-EGD compliant

Part #: 6450000G	2.6 fl. oz. (78 ml) tray	48 loose	1 gallon mix (3.8 L)	1711	Part #: 99988800083	1 quart (946 ml)	12 per case
Part #: 6450001G	2.6 fl. oz. (78 ml)	(8) 6 pks.	1 gallon mix (3.8 L)		Part #: 6459007W	1 gallon	4 per case
Part #: 6450002G	5.2 fl. oz. (154 ml)	(8) 6 pks.	2 gallon mix (7.6 L)			(3.8 L)	-
Part #: 6450025G	6.4 fl. oz. (189 ml)	(8) 6 pks.	2.5 gallon mix (9.5 L)		1		
Part #: 6450005G	12.8 fl. oz. (379 ml)	12 per case	5 gallon mix (19 L)				
Part #: 6450006G	16 fl. oz. (473 ml)	12 per case	6 gallon mix (22.7 L)	POWERDLENG GOLD			
Part #: 6450050G	1 gallon (3.8 L)	4 per case	50 gallon mix (189 L)				
Part #: 6450250G	5 gallons (19 L)	1 pail	250 gallon mix (946 L)				
Part #: 6452750G	55 gallons (2	1 drum	2,750 gallon mix (10,410 L)		Oil Pail Disp	ensing	Pump



Bar and Chain Oil

Anti-wear additive

Tackifiers for lubrication

and dust removal.

.

.

Reduce frictional heating with this unique blend of lubricants and detergents, all while

lessening resin buildup and promoting chip

2-year shelf life when properly stored

Meets OECD 301 specifications

For 5 gallon (19 L) pail



By staying on top of recommended maintenance schedules, you not only prolong the life of your ECHO equipment but also save time and money by reducing large scale repairs often incurred by not properly maintaining equipment.



Tune-Up kit

One convenient kit with all the necessary parts to keep your ECHO equipment running at peak performance.

- Air Filter
- Fuel Pre-Filter
- Spark Plug



Air Filter Kit Fits select ECHO models.

Lid Fastener





Fuel System Kit


One kit with all the necessary fuel components to keep your ECHO engine running smoothly.

- Fuel Filter
- Fuel Lines
- Grommet
- Fuel Gasket
 - Purge Bulb



Model	Tune-Up Kit	Fuel System Kit	Gas Cap	Spark Plug	Purge Bulb	Air Filter Kit	Guide Bar Nut	
Bed Redefiner								
BRD-2620	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
Chainsaw	001011	001021	002 17 1	001001	001001	10.	10.0	
CS-2511T*	90201Y	NA	NA	90186Y	90254Y	NA	NA	
CS-2511T**	90196Y	NA	NA	90186Y	90254Y	NA	NA	
CS-271T	90178Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-2511P	NA	NA	NA	90186Y	90254Y	NA	NA	
CS-303T	90149Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-310	90121Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-325	90175Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-3510	90200Y	NA	NA	90114Y	90254Y	NA	90250Y	
CS-355T***	90202Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-355T****	90144Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-400	90155Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-4010	90252Y	NA	NA	90114Y	90254Y	NA	90250Y	
CS-4510	90197Y	NA	NA	90114Y	90249Y	NA	90250Y	
CS-4910	90174Y	NA	NA	90114Y	NA	NA	90250Y	
CS-501P	90174Y	NA	NA	90114Y	NA	NA	90250Y	
CS-590,CS-620P/PW	90167Y	NA	NA	90114Y	NA	NA	90250Y	
Cut-Off Saw								
CSG-7410					90254Y			
Hedge Trimmer								
HC-155	90152Y	NA	90247Y	90114Y	90249Y	NA	NA	
HC-2020	90152Y	90191Y	90247Y	90114Y	90249Y	NA	NA	
HC-2210, HC-2810, HCS-2810, HCS-3810	90152Y	NA	NA	90114Y	90249Y	NA	NA	
HCA-2620/S	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
SHC-225/S	90152Y	NA	90247Y	90114Y	90249Y	90116Y	NA	
SHC-2620/S	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
Pro Attachment Series™	501011	501021	302471	501001	501051	INA	INA	
PAS-225/SB/VP/VPB	90152Y	90251Y	90247Y	90114Y	90249Y	90116Y	NA	
PAS-2620	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
Blower	501011	501021	302471	501001	501051	INA	INA.	
PB-2520	90183Y	90184Y	90247Y	90114Y	90249Y	NA	NA	
PB-255LN	90154Y	90130Y	90247Y	90114Y	90249Y	NA	NA	
PB-2620	90192Y	90193Y	90247Y	90114Y	90185Y	NA	NA	
PB-265LN	90154Y	NA	90247Y	90114Y	90249Y	NA	NA	
PB-580H/T	90156Y	90158Y	90247Y	90114Y	90249Y	NA	NA	
PB-755SH/ST	90156Y	NA	90247Y	90114Y	90249Y	NA	NA	
PB-770H/T	90122Y	NA	90247Y	90114Y	90249Y	NA	NA	
PB-9010H/T	90194Y	90195Y	90247Y	90186Y	90249Y	NA	NA	
Edger	501541	301331	3024/1	301001	302431	1474	1474	
PE-225	90152Y	90251Y	90247Y	90114Y	90249Y	90116Y	NA	
PE-2620/S	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
Power Pruner*	501011	301021	3024/1	301001	501051	1474	11/1	
PPF-225	90152Y	NA	90247Y	90114Y	90249Y	90116Y	NA	
PPF-2620, PPT-2620/H	90181Y	90182Y	90247Y	90186Y	90185Y	NA	NA	
Shred 'N' Vac*	501011	301021	3024/1	301001	501051	1474	1474	
ES-250	90152Y	90129Y	90247Y	90114Y	90249Y	90112Y	NA	
Tiller	001021	001201	002171	00111	002101	001121		
TC-210	90152Y	90176Y	90247Y	90114Y	90249Y	90112Y	NA	
Trimmer/Brushcutter	501521	501/01	302471	501141	502451	501121	INA.	
GT-225/i/L/SF, SRM-225/i/U	90152Y	90251Y	90247Y	90114Y	90249Y	90116Y	NA	
SRM-2320T	90198Y	NA	90247 Y	90114 Y 90114 Y	902491 90249Y	NA	NA	
SRM-266	90125Y	90137Y	902471 90247Y	90114 Y	902491 90249Y	NA	NA	
SRM-2620/T/U	901231 90181Y	90182Y	902471 90247Y	90186Y	90185Y	NA	NA	
SRM-3020/T/U	90181Y	90182 F	902471 90247Y	90186Y	901851 90185Y	NA	NA	
SRM-410X/U	NA	NA	90247 Y 90247 Y	90186 Y	90185 Y 90249Y	NA	NA	
Trimmer Head Maintenance Kit	NA	NA	302471	INA	502491	NA	INA	
			_	OIIZ - Trimmer (Pool			
For ECHOmatic Pro™ Trimmer Head For Speed-Feed® 400 Trimmer Head	90113 - Trimmer Spool							
•	90170Y - Cap & Spring Kit / 90170YB - Cap & Spring Kit (bulk)							
For Speed-Feed' 450 Trimmer Head For Speed-Feed' 500 Trimmer Head	90189YB - Cap and Spring Kit (bulk) 90253Y - Cap & Spring Kit / 90253YB - Cap & Spring Kit (bulk)							

*Built 1/2020 & after **Built before 1/2020 ***Built 12/2020 & after ****Built before 12/2020

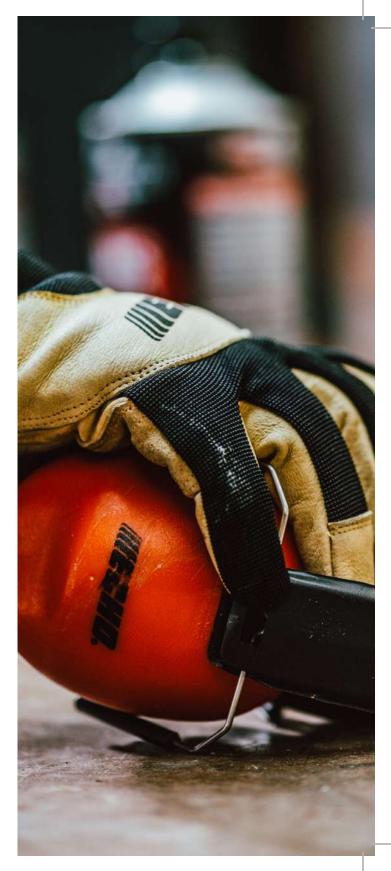



PERSONAL PROTECTION EQUIPMENT

Landscape Gloves

Flexible nylon with form-fitting fingers and hook and loop wrist closure for secure fit. Part #: 103942194 (M) Part #: 103942196 (L) Part #: 103942197 (XL)



Vibration-reducing Landscape Gloves

Premium, padded leather palm to reduce vibration, form-fitting fingers, and hook and loop wrist closure for secure fit. Part #: 103942195 (M) Part #: 103942198 (L) Part #: 103942199 (XL)

Hearing Protection

Helps reduce potentially harmful noise emissions from damaging hearing. NRR 29 dB(A) rating. Meets ANSI S3.19 standards.





Premium Brushcutter Harness

Features 4-point suspension system enabling easier handling and reduces weight-bearing. Padded shoulder straps for comfort with quick-release pin for safety. Max waist size: 40 in. Part **#: 99944200202**

Earplugs with Case

Equipment Bag

Carryall solution for work gear

and/or extra accessories to

11 in. W

Part #: 103942145

keep everything in one place. Dimensions: 24 in. L x 12 in. H x

ANSI and OSHA approved. Carrying case keeps earplugs clean and ready to go. NRR 23 dB(A) rating. Part #: 103942210



Brushcutter System

Includes steel mesh face visor and earmuffs offering excellent face and ear protection while trimming or brushcutting. NRR 24 dB(A) rating. Part #: 99988801510

Shoulder Straps

A shoulder strap helps to support the weight of a trimmer or brushcutter. Fits up to 46 in. waist. Cross-body fit: 52 in. Part #: 99944200200 (SRM Models) *Use SRM strap for GT-225L Part #: 99944200201 (GT Models)

Heavy-duty Work Gloves

Features leather palms and

fingers to offer durability

and protection against most elements and sharp objects. One size fits most. Part **#: 103942074**



Lightweight with padded shins and hook and loop straps for easy on/off access. Water resistant.Fits up to 23 in. calf circumference. Dimensions: 18 in. H x 9 in. W Part **#: 103942180**









THE MOST POWERFUL FLEET PROGRAM DEDICATED TO LANDSCAPERS

BECOME A FLEET MEMBER AND SAVE

ECHO's Landscaper Fleet Program has multiple money saving options to fit any need. Get 10%, 15% or 20% savings when you purchase select ECHO and Shindaiwa products and accessories.







Want more details? Contact your local dealer to learn how to become a Fleet member today!

POWERFUL PRODUCTS. POWERFUL WARRANTIES.

At ECHO, we're so confident in the quality and durability of our products that we back them with industry-leading warranties that extend up to five years for consumer use and up to two years for commercial use. That means you can rely on your ECHO tools job after job, season after season, knowing that your investment is protected.

PRODUCT		COMMERCIAL	CONSUMER
Handheld	Gas Chainsaws	1 year	5 years
	Battery Chainsaws	2 years	5 years
	All other handheld	2 years	5 years
	Cut-Off Saw	1 year	1 year
Sprayers	MS-1H	None	90 days
	All other manual sprayers	2 years	5 years
Spreaders	RB-60	90 days	5 years
	All other spreaders	2 years	5 years
Hand Tools	All Models	Limited Lifetime	Limited Lifetime
Inverters/Generators	All Models	90 days	3 years
Pressure Washers	PWE-1800	None	1 year
	PW-3100 & PW-3200	1 year (Pump: 90 days)	3 year (Pump: 1 year)
	PW-3600	1 year	3 years
	PW-4200	3 years (Engine) 1 year (Frame, Pump)	3 years
Chipper/Shredders*	All Models	1 year	3 years
Fire Pump*	All Models	1 year	3 years
Wheeled Trimmer*	All Models	1 year	3 years
Mower	All Models	2 years	5 years
56V Batteries and Chargers	All Models	2 years	2 years

Visit ECHO.ca/product-warranty to learn more about our warranties and see why ECHO is the trusted choice of outdoor professionals and homeowners alike.

Scan here for detailed warranty information and to register your products.



*Engine warranties are provided by the engine manufacturer.



ECHO.CA



0

www.facebook.com/ECHO.CANADA

www.instagram.com/ECHO.CANADA

www.youtube.com/ECHOCANADA

ECHO Power Equipment (Canada) • 311 Sovereign Road, London, Ontario N6M 1A6 • ECHO.CA For customer service or for your nearest ECHO dealer call toll-free 1-800-700-1358.

Specifications, descriptions, and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.

© 2024 ECHO Incorporated, a subsidiary of Yamabiko Corporation. All Rights Reserved. Printed in the Canada. #MKT2400001