

HONDA



Honda Power Equipment

Snowblowers • Generators

The Legacy of Honda

Our storied history began with a goal: push technological boundaries and ensure the best customer experience possible. Honda Power Equipment recently celebrated the production of 100 million power products worldwide—a testament to our legendary reliability.

Durability

Engineered with the ability to withstand the elements, the demands of your job and continuous use from one season to the next, Honda products are made to last.

Quality

Honda has built a strong reputation on quality, so you can rest assured that your Honda product is made of quality materials, as well as quality in the functionality and practicality of the design.

Reliability

At Honda, we put our decades of experience towards ensuring that your Honda product is engineered to provide results that you can count on, year after year.



The Legendary Honda Engine

Building a legendary engine is no accident. Honda has more than 65 years of experience designing engines and is the largest engine manufacturer in the world. While some covet and others imitate, only genuine Honda offers a powerful, efficient and quiet 4-stroke engine designed perfectly for your Honda Power Equipment product.

Providing Power Equipment to Customers for Over 65 Years

Since beginning power equipment production in 1953, Honda has been providing a remarkable level of quality to customers who rely on trustworthy and portable power solutions. Today, a diverse range of lifestyle-focused Honda Power Equipment products continue to be one of the favourite choices of Canadian consumers who value the timeless appeal of smooth and reliable power, enhanced efficiency, and modern designs that combine innovative technology with a user-friendly operation.

The Honda Civic keeps getting better

Since 1998, the Civic has been Canada's best-selling car and it's no wonder. The exterior and impressive performance of the 2020 Civic solidify its exciting evolution. The sport-inspired design is perfectly complemented by an available 1.5-litre turbocharged engine, while the striking interior is designed with both comfort and safety in mind. And with the Honda Sensing™ suite standard across the Civic lineup, you'll always drive with added confidence. Wherever the road leads, the Civic will lead the way.

The Height of Technology

HondaJet is the culmination of our vision to bring unmatched personal mobility to the skies. HondaJets represent the fastest, highest-flying, quietest and most fuel-efficient jets in their class—recognized as the world's most advanced light business jet aircraft, with best-in-class advantages in performance, comfort, quality and efficiency. The continued success of HondaJet is an achievement that showcases the ability for Honda to, quite literally, take their customers to new heights.



Since 1980, Honda has offered a continuously-evolving lineup of snowblowers designed to meet the changing needs of our customers. When you buy a Honda Snowblower, you're buying reliability, ease of use, proven power that clears heavy snow, and Honda innovation you can trust. No Canadian garage or home is complete without one.

The Honda Retail Experience

Honda Power Equipment retailers are expertly trained to provide the highest level of knowledge, service and support—with more than 300 Honda Power Equipment retailers conveniently located across Canada.

Our Honda experts will help you find the right snowblower or generator to get the job done.

Plus, each specialized Honda retail store professionally assembles your product and offers a detailed working demonstration. They are available to service and repair products according to stringent factory standards. Canadians can rely on knowing that Honda Power Equipment has retail support that lasts the lifetime of their Honda product.

Honda Plus Extended Warranty

All Honda Power Equipment products come with a standard distributor's warranty. With Honda Plus Extended Warranty, qualifying repairs are covered with zero deductible. Honda Plus is also fully transferable under most conditions, and ensures your product is repaired by qualified Honda technicians using high-quality Honda Genuine parts. Some restrictions or exclusions apply. For more information on warranty, please visit your local retailer or honda.ca.

Why Honda?

Honda Power Equipment products are easy to start. They don't mix oil and gasoline, which offers many advantages including clean and quiet operation, few fill-ups, low maintenance costs, and low emissions. Additionally, Honda products are dependable—you can count on them for years to come.

HONDA

Plus



Snowblowers

Thanks to the presence of a Honda engine in every Honda Snowblower, you can trust in its reliability, ease of use, proven power for heavy snow clearing and the customer support that comes with every Honda product. Put the Honda Snowblowers to the test this winter and see what over 35 years of Honda innovation can do for your winter.

Single-Stage/Dual-Stage



Single-Stage vs. Dual-Stage Snowblowers

Honda makes both single-stage and dual-stage snowblowers to suit different snow removal needs



Single-stage are lightweight, compact and ideal for light to moderate snow conditions (less than 20 cm [8 in.]). They are designed to handle small jobs like sidewalks, walkways and short driveways. Single-stage snowblowers rapidly take in snow and direct it through a discharge chute in a single motion, hence the name, single-stage. The auger (the blade you see in front of the blower) makes contact with the surface you are clearing and therefore should only be used on paved surfaces.



Dual-stage are ideal for handling large amounts of snow on any solid surface. Dual-stage snowblowers have two stages of snow removal—the auger collects the snow, and an impeller then discharges the snow through a chute, throwing it faster and farther away. The two stages of snow removal, combined with the fact that the auger doesn't touch the ground, makes them perfect for clearing any solid surface (including gravel or dirt). The variable speed hydrostatic transmission that comes standard with most dual-stage Honda snowblowers makes it easy to clear large volumes of snow, even on sloped surfaces, quickly and easily.



Hydrostatic Transmission[†]

The intuitive hydrostatic transmission easily sets a more comfortable pace and can change speeds without disengaging tracks/wheels. The single centralized control allows for quick, smooth transitions between forward and reverse with precise speed adjustment—without affecting the auger rotation speed.

[†]Available on HSS724CT/CTD, HSS928CW/CT/CTD, HSS1332CT/CTD models.

4-Stroke Honda Engine

An efficient, easy-start 4-stroke Honda engine (including single-stage models) powers every snowblower. All dual-stage snowblowers feature commercial-grade Honda GX series engines built for easy, reliable, cold weather starts.

Track Drive

The excellent track drive snowblowers from Honda feature pliable, low-temperature tracks with sure-gripping cleats for greater control, helping to ensure easy operation on steep inclines, declines and hard packed snow with excellent traction.


On-Board Battery^{††}


Eliminating the need for dependency on 120 VAC electric outlets for a plug-in start, the handy 12 VDC electric start with on-board battery is ready to go anywhere and anytime without a power source nearby. Also, all on-board battery models come standard with recoil pull start, for back-up purposes with the exception of the HSM1336iCTD.

^{††}Available on HSS622CTD, HSS724CTD, HSS928CTD, HSS1332CTD and HSM1336iCTD models.

Choosing the Right Honda Snowblower for You

Choosing the right Snowblower is important to help ensure the best experience and the most efficient results. Honda has simplified the decision process by asking questions designed to lead you directly to the best Honda Snowblower for your snow removal needs. It's easy; just follow the question path. Once you discover the Snowblower for your snow removal needs, learn more about your model on the following pages. Let's get started!

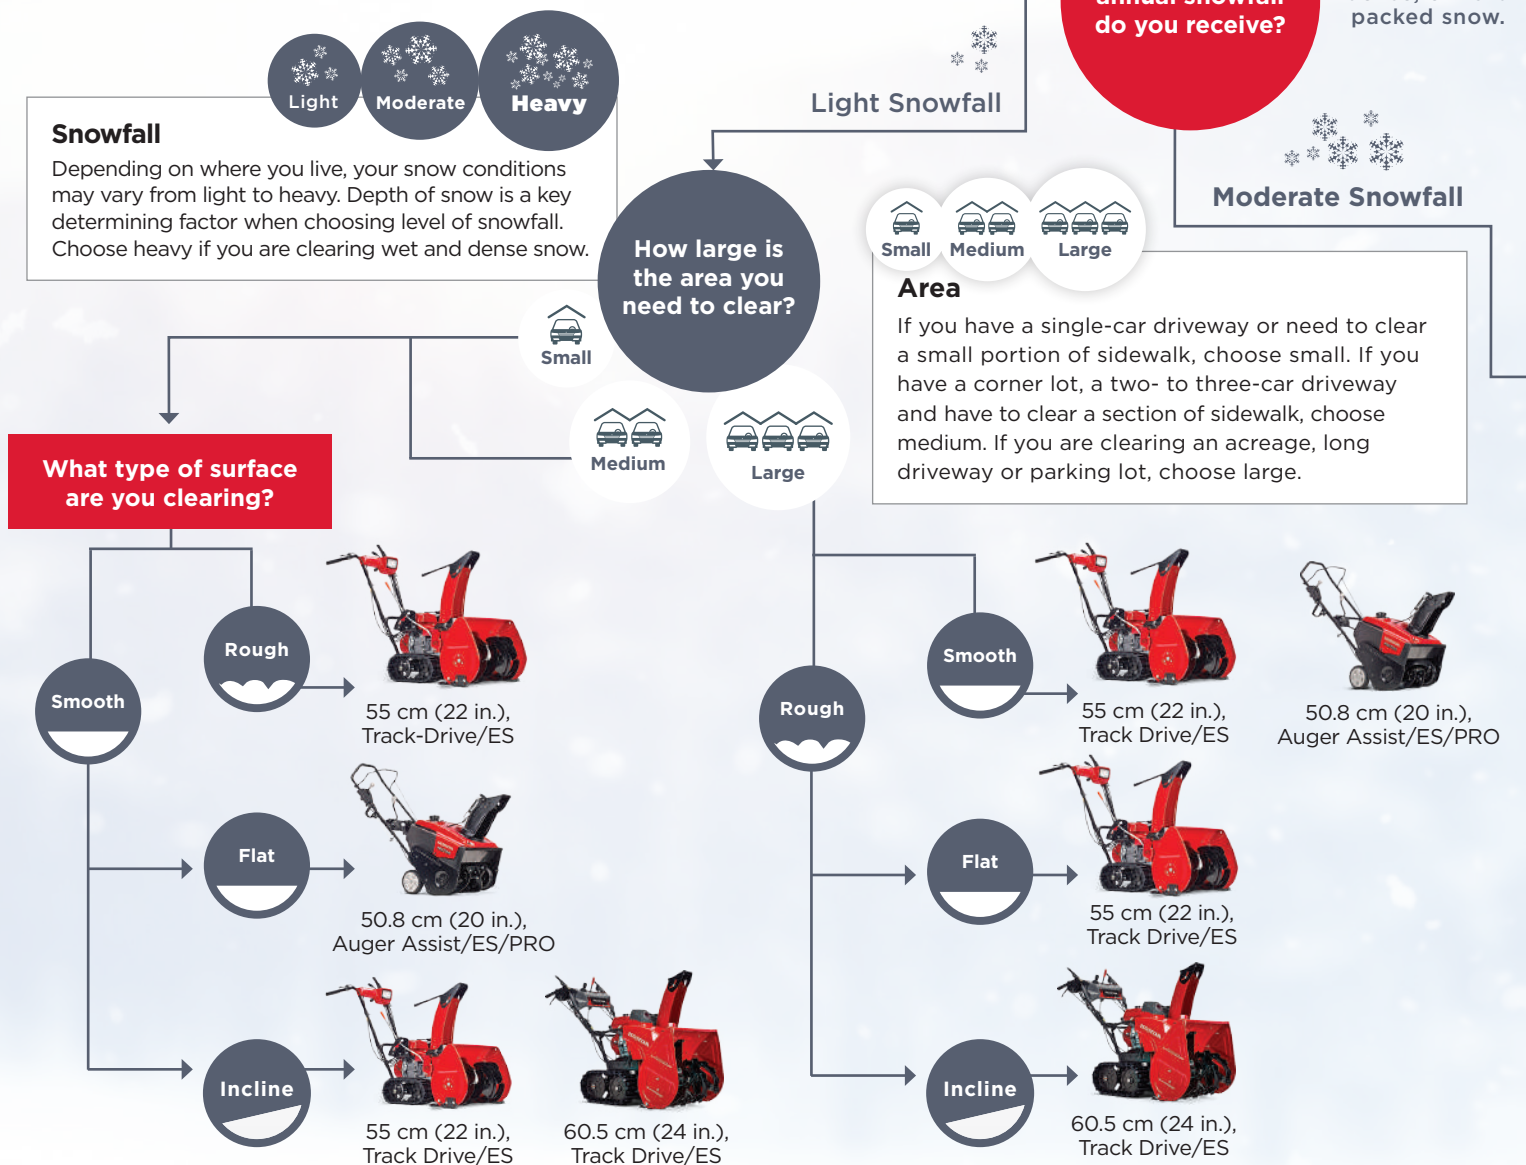

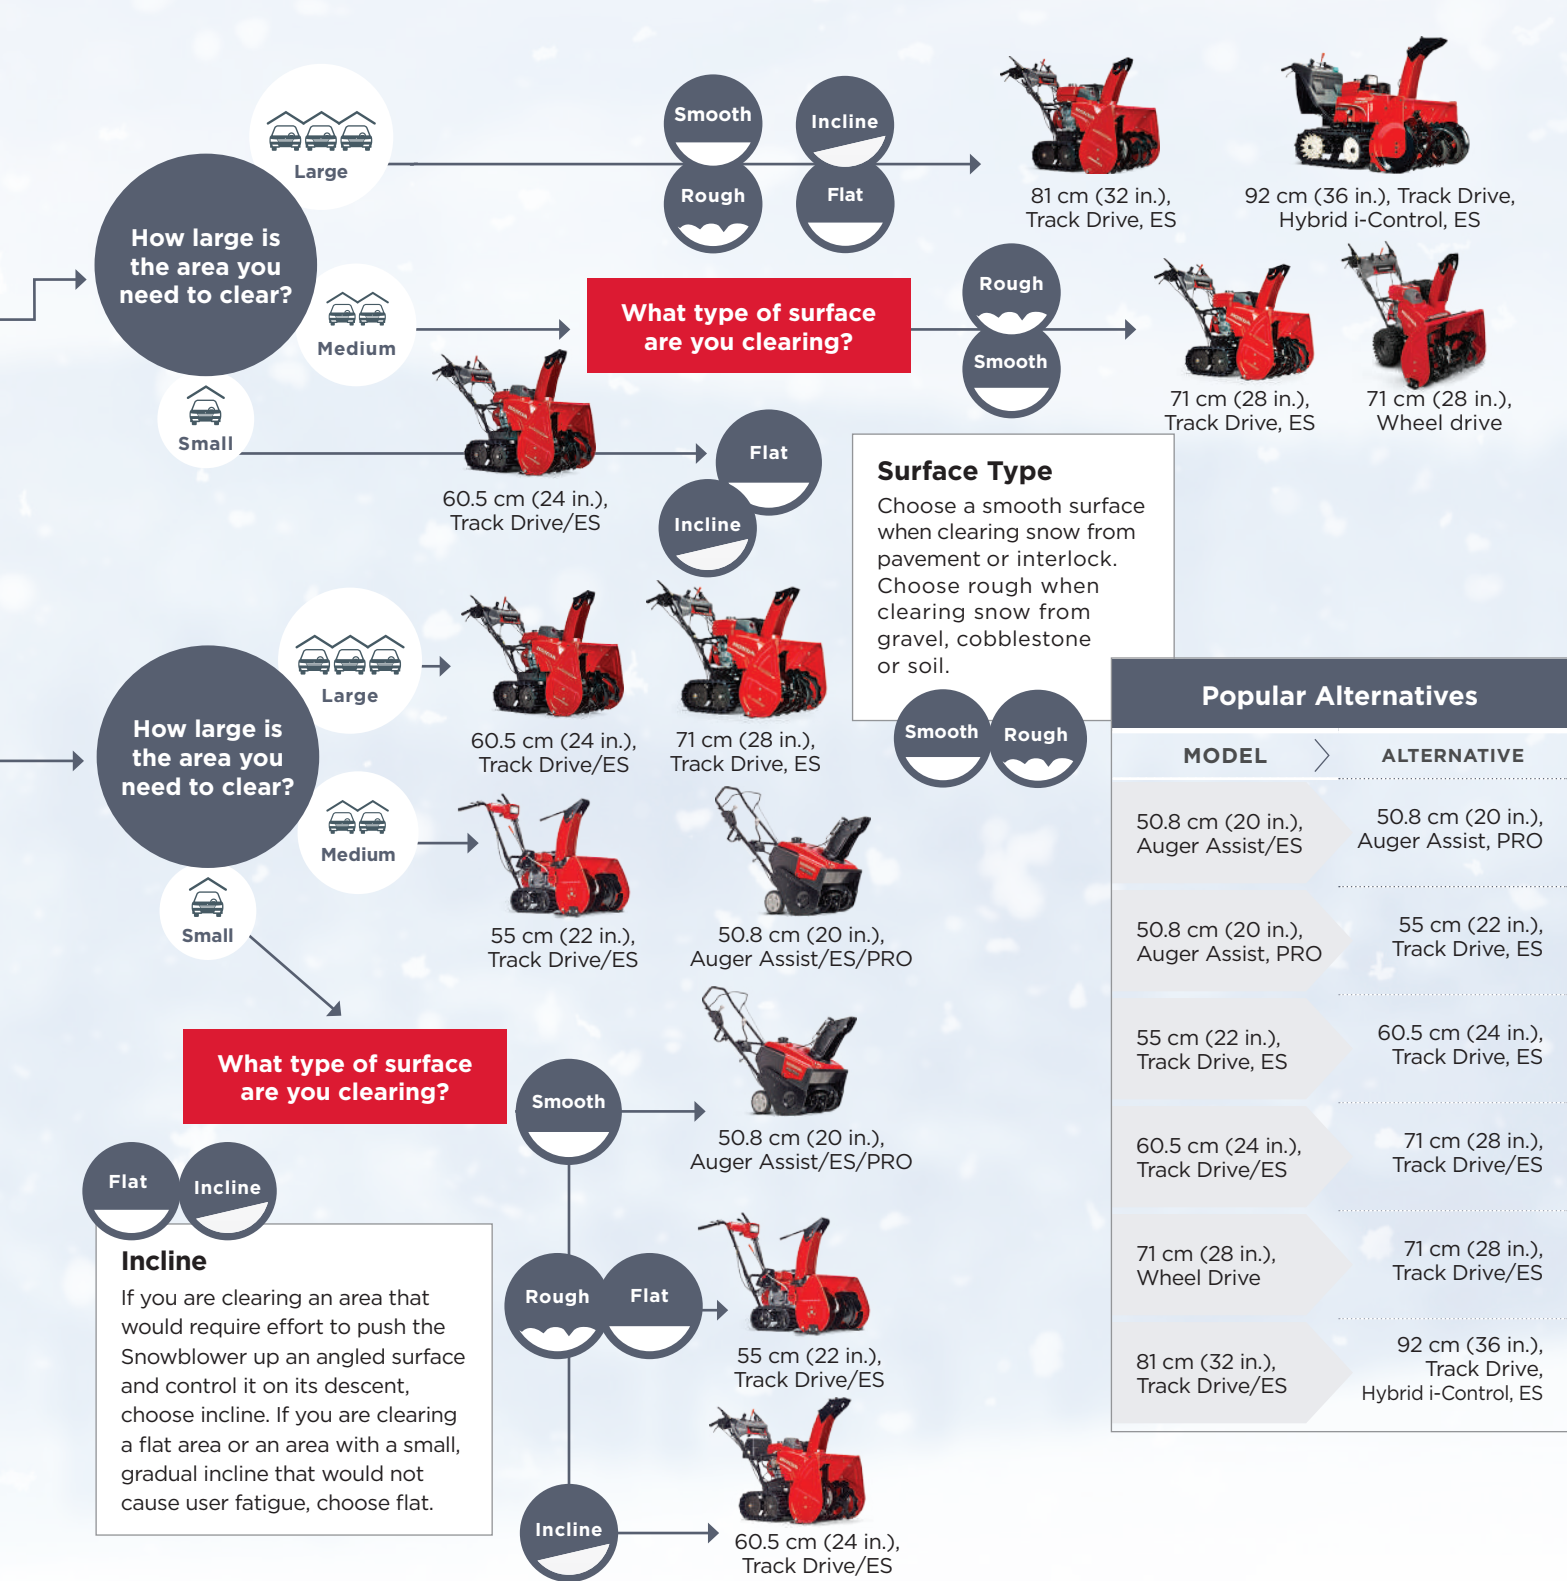

Honda Snowblowers come with **great features** and **legendary Honda quality**

Remote Electric Chute with Joystick Control

Versatile on-the-go joystick control governs height and direction of snow discharge, allowing adjustment to easily shoot snow up, down or side-to-side. Two-step chute on select models (CTD) gives even more precise control over snow discharge. Electric chute with exclusive joystick control is available on all dual-stage models with the exception of the HSS622 series.

Ergonomic

Intuitive styling, layout and design helps to ensure easy-to-reach controls. The ergonomic controls provide quick and comfortable operation at your fingertips, including the hydrostatic transmission, auger height adjustment, remote electric chute and steering assist drive system for excellent maneuverability and enhanced control.

Steering Assist Drive System

Clever fingertip trigger steering controls offer improved maneuverability with or without engine running. With these levers, you can select which wheel/track should drive allowing precise turns for exceptional steering and effortless maneuverability on-the-fly.

On-Board Battery

Eliminating the need for dependency on 120 VAC electric outlets for a plug-in start, the handy 12 VDC electric start with on-board battery is ready to go anywhere and anytime without a power source nearby. Also, all on-board battery models come standard with recoil pull start, for backup purposes.

4-Stroke Honda Engine (All Models)

An efficient, easy-start 4-stroke Honda engine (including single-stage models), powers every snowblower. All dual-stage snowblowers feature commercial-grade Honda GX series engines built for easy, reliable, cold weather starts.

Track Drive

The excellent track drive snowblowers from Honda feature pliable, low-temperature tracks with sure-gripping cleats for greater control, helping to ensure easy operation on steep inclines, declines and hard packed snow with excellent traction.


Automotive-Grade Steel Construction

Toughness and strength with all-steel, reinforced side auger housing and chute are combined with the heavy-duty auger to provide extra durability for long lasting performance.

Skid Shoes

Skid shoes adjust the space between the auger housing and the ground to help protect ground/surfaces that are also reversible for extra-long service life. Wheel model (HSS928ACW) uses side-mount auger housing skid shoes, while other models employ rear-mounted auger housing skid shoes.



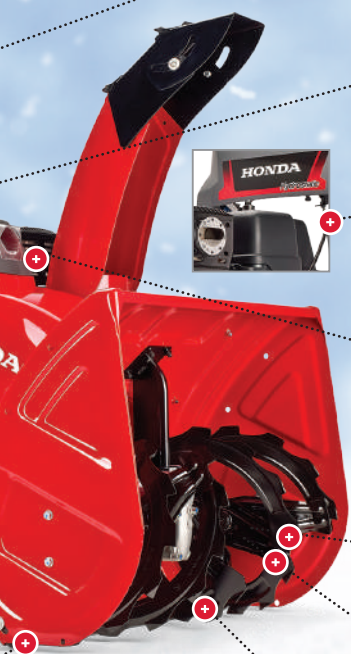

Hydrostatic Transmission



The intuitive hydrostatic transmission easily sets a more comfortable pace and can change speeds without disengaging tracks/wheels. The single centralized control allows for quick, smooth transitions between forward and reverse with precise speed adjustment without affecting the auger rotation speed.

Auger Height Adjustment Lever (Track Models Only)




Quickly go from one surface to another with the gas-assist auger height system. It adjusts the auger height to variable positions (left-hand thumb operation) according to changeable surface conditions (gravel, hard surface, interblock) or snow conditions. Move from your driveway to your sidewalk and back, on-the-fly.

Operate with Ease



Featuring a conveniently large fuel tank for extended run times between fill-ups, plus a winter glove-friendly tall fuel cap design with chain. A handy hour meter can also track usage and maintenance intervals (found on the 71 cm [28 in.] and 81 cm [32 in.] Track Drive ES models).

Carburetor Icing Guard



Exclusive Honda carburetor icing guard (dual-stage models only, with the exception of the HSS622 series) is engineered to allow for reliable working without disruption, helping to prevent the carburetor from freezing or ice build-up due to extreme temperatures by warming cold air around the engine and directing heat to the carburetor.

LED Work Headlight



Compact, crisp and clear LED technology provides more than exceptional lighting in all conditions, improving visibility for easy operation and adding safety for early morning or late night snow removal. The LED light offers performance and a lifespan that is not available with the incandescent bulbs offered by some other competitors (on all dual-stage models with the exception of the 55 cm [22 in.], Track-Drive and the 92 cm [36 in.], Track Drive, Hybrid i-Control, ES).

Dual-Stage Design



Advanced dual-stage auger and impeller design easily tackles some of the toughest winter conditions. The heavy-duty serrated auger is designed to break up icy, hard packed or extremely wet snow and the impeller sends it quickly up the chute.

Shear Bolt Guard System*



The exclusive Honda shear bolt guard system helps to protect your snowblower from mechanical damage and unnecessary downtime caused by unwanted debris. Should foreign material induce the auger to lock during operation, this clever feature is designed to automatically stop the engine, alert the operator and reduce the hassle of constantly replacing shear bolts.

Heavy Duty Auger



The heavy-duty serrated auger breaks up icy, hard packed or extremely wet snow. Its design improves the centre of gravity and helps prevent the auger from riding up. Combined to the chamfered scraper bar and the oversized auger housing height, they optimize the throwing distance and volume for first-class snow clearing performance.

Single-Stage

Lightweight and compact by design, single-stage snowblowers are easy to handle and take up similar storage space as a mower. Great primarily for flat, paved surfaces.

50.8 cm (20 in.), Auger Assist

HS720C

- Great for smaller paved driveways and sidewalks
- Single-stage, semi self-propelled, 50.8 cm (20 in.) clearing width
- Clears up to 45 metric tons (50 tons) of snow per hour[†]
- Lightweight and manoeuvrable, easy to transport and store
- Snow Director™ chute control

20" Auger Assist ES includes all above features, plus 120 VAC electric start.



50.8 cm (20 in.), Auger Assist, PRO

HS720CC

- Perfect for walkways, paved or interlocking stone driveways or commercial applications
- Single-stage, semi self-propelled, 50.8 cm (20 in.) clearing width
- Clears up to 45 metric tons (50 tons) of snow per hour[†]
- Higher durability, GS commercial light application engine



Dual-Stage

If you need to quickly move heavy, deep snow from graveled, paved, hilly, or flat surfaces, then a dual-stage snowblower is your best option.



55 cm (22 in.), Track-Drive ES

HSS622CTD

- Perfect for steep city driveways, light to medium snow conditions
- Dual-stage, track drive, clears 55 cm (21.7 in.) width
- Clears up to 37 metric tons (41 tons) per hour[†]
- Remote throttle and choke controls (on the handlebar)



60.5 cm (24 in.), Track Drive

HSS724ACT

- Ideal for urban- or suburban-sized driveways, medium to heavy snow conditions or commercial applications
- Dual-stage, track drive, 60.5 cm (23.8 in.) clearing width
- Clears up to 42 metric tons (46 tons) of snow per hour[†] and throw it up to 15 m (49.2 ft.)[†]
- Exceptional traction with track drive

Also available with 12 VDC electric start with manual recoil as backup, electric two-step chute with joystick control—HSS724ACTD.



71 cm (28 in.), Wheel Drive

HSS928ACW

- Dual-stage, wheel drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (up to 57 tons) of snow per hour[†] and throws it up to 16 metres (52.5 ft.)[†]
- Infinitely variable hydrostatic transmission with steering assist drive system provides convenient and intuitive operation with optimum control.

Dual-Stage

If you need to quickly move heavy, deep snow from graveled, paved, hilly, or flat surfaces, then a dual-stage snowblower is your best option.

71 cm (28 in.), Track Drive

HSS928ACT



- Ideal for large driveways or other areas, heavy snow conditions or commercial applications
- Dual-stage, track drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (57 tons) of snow per hour[†] and throws it up to 16 metres (52.5 ft.)[†]
- Low noise muffler with protection guard

71 cm (28 in.), Track Drive, ES

HSS928ACTD



- Ideal for large driveways or other areas, heavy snow conditions or commercial applications
- 12 VDC electric start with manual recoil as backup
- Electric two-step chute with joystick control
- Shear bolt guard system and hour meter
- Dual-stage, track drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (57 tons) of snow per hour[†] and throws it up to 16 metres (52.5 ft.)[†]



81 cm (32 in.), Track Drive

HSS1332ACT

- Ideal for large or extra-large driveways or other areas, heavy snow conditions or commercial applications
- Dual-stage, track drive, 81 cm (31.9 in.) clearing width
- Clears up to 75 metric tons (83 tons) of snow per hour[†] and throws it up to 17 metres (55.8 ft.)[†]
- Low noise muffler with protection guard



81 cm (32 in.), Track Drive, ES

HSS1332ACTD

- Ideal for large or extra-large driveways or other areas, heavy snow conditions or commercial applications
- 12 VDC electric start with manual recoil as backup
- Electric two-step chute with joystick control
- Shear bolt guard system and hour meter
- Dual-stage, track drive, 81 cm (31.9 in.) clearing width
- Clears up to 75 metric tons (83 tons) of snow per hour[†] and throws it up to 17 metres (55.8 ft.)[†]



92 cm (36 in.), Track Drive, Hybrid i-Control, ES

HSM1336iCTD

- Ideal for any large property
- Computerized i-Control system automatically completes repetitive tasks and matches engine loads to snow conditions
- 24 VDC electric start, low noise and fuel efficient power, 92 cm (36 in.) clearing width
- Clears up to 83 metric tons (91 tons) of snow per hour[†] and throws it up to 19 metres (62.3 ft.)
- Move the snowblower without running the engine*

[†]Varies with snow conditions. *Maximum 3 minutes without the engine running. Note that images shown may vary from actual product.

Snowblower Specifications

	SINGLE-STAGE			Dual-Stage		
SPECIFICATIONS	50.8 cm (20 in.), Auger Assist	50.8 cm (20 in.), Auger Assist, ES	50.8 cm (20 in.), Auger Assist, PRO	55 cm (22 in.), Track Drive, ES	60.5 cm (24 in.), Track Drive	60.5 cm (24 in.), Track Drive, ES
Model Code	HS720C	HS720CS	HS720CC	HSS622CTD	HSS724CT	HSS724CTD
Discharge Type	Single-stage	Single-stage	Single-stage	Dual-stage	Dual-stage	Dual-stage
Axle Type	Wheel	Wheel	Wheel	Track drive	Track drive	Track drive
Drive Type	Auger assist	Auger assist	Auger assist	Gear mesh transmission	Hydrostatic transmission (HST) with Steering Assist Drive System	Hydrostatic transmission (HST) with Steering Assist Drive System
Transmission Oil Capacity	N/A	N/A	N/A	N/A	1.94 - 1.97 L	1.94 - 1.97 L
Recommended Oil	N/A	N/A	N/A	N/A	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
Speeds	N/A	N/A	N/A	2 forward / 1 reverse	Infinitely variable	Infinitely variable
Maximum Ground Speed	N/A	N/A	N/A	Forward (1): 22.2 m/min (72.8 ft./min) Forward (2): 52.8 m/min (173.2 ft./min) Reverse: 51 m/min (167.3 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 48 m/min. (157.5 ft./min)
Clearing Width	50.8 cm (20 in.)	50.8 cm (20 in.)	50.8 cm (20 in.)	55 cm (21.7 in.)	60.5 cm (23.8 in.)	60.5 cm (23.8 in.)
Intake Housing Height	30 cm (12 in.)	30 cm (12 in.)	30 cm (12 in.)	42 cm (16.5 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)
Auger Diameter	23 cm (9.1 in.)	23 cm (9.1 in.)	23 cm (9.1 in.)	30.5 cm (12 in.)	35.5 cm (14 in.)	35.5 cm (14 in.)
Auger Type	Rubber edge	Rubber edge	Rubber edge	Steel	Steel serrated (Spiral)	Steel serrated (Spiral)
Auger Drive	Belt	Belt	Belt	Dry, multi-disc clutch	Belt driven shaft	Belt driven shaft
Auger Transmission	N/A	N/A	N/A	Screw gear	Screw gear	Screw gear
Auger Oil Capacity	N/A	N/A	N/A	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)
Recommended Oil	N/A	N/A	N/A	SAE #90 gear oil	SAE 75W90 GL-5	SAE 75W90 GL-5
Auger Height Adjustment	Scraper bar	Scraper bar	Scraper bar	3 position adjuster	Gas assist	Gas assist
Chute Rotation	Remote manual lever	Remote manual lever	Manual lever	Manual lever	Remote electric "Joystick" control	Remote electric "Joystick" control
Chute Turning Radius	204°	204°	220°	195°	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)
Deflection Control	Remote manual lever	Remote manual lever	Manual lever	Manual lever	Remote electric "Joystick" control	Remote electric "Joystick" control
Chute Material	Steel	Steel	Steel	Steel	Steel	Steel
Maximum Throw Distance*	10 m (32.8 ft.)	10 m (32.8 ft.)	10 m (32.8 ft.)	14 m (46 ft.)	15 m (49.2 ft.)	15 m (49.2 ft.)
Clearing Snow Volume Capacity (Approximate)*	Up to 45 metric tons/hr (50 tons/hr)	Up to 45 metric tons/hr (50 tons/hr)	Up to 45 metric tons/hr (50 tons/hr)	Up to 37 metric tons/hr (41 tons/hr)	Up to 42 metric tons (46 tons/hr)	Up to 42 metric tons (46 tons/hr)
Engine Type	Honda GC190, 4-stroke, OHC, single-cylinder	4-stroke; OHC; single-cylinder	4-stroke; OHC; single cylinder	4-stroke; OHV; single cylinder	4-stroke; OHV; single-cylinder	4-stroke; OHV; single-cylinder
Honda Engine Model	GC190	GC190	GS190	GX160T2	GX200T2	GX200T2
Displacement	187 cc (11.4 CID)	187 cc (11.4 CID)	187 cc (11.4 CID)	163 cc (9.9 CID)	196 cc (12 CID)	196 cc (12 CID)
Ignition System	Transistorized magneto	Transistorized magneto	Transistorized magneto	Transistorized	Transistorized	Transistorized
Recoil Starter	Standard	Standard (Back-up)	Standard	Standard (Back-up)	Standard	Standard (Back-up)
Electric Starter	N/A	Standard 120 VAC type	N/A	Standard 12 VDC type (Battery)	N/A	Standard 12 VDC type
Lubrication System	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash
Oil Capacity	0.58 L (20.4 fl. Imp. oz.)	0.58 L (20.4 fl. Imp. oz.)	0.58 L (20.4 fl. Imp. oz.)	0.58 L (20.4 fl. Imp. oz.)	0.60 L (21.1 fl. Imp. oz.)	0.60 L (21.1 fl. Imp. oz.)
Recommended Oil	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
Recommended Fuel	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)
Fuel Capacity	11 L (38.7 fl. Imp. oz.)	11 L (38.7 fl. Imp. oz.)	11 L (38.7 fl. Imp. oz.)	31 L (0.68 Imp. gal.)	31 L (0.68 Imp. gal.)	31 L (0.68 Imp. gal.)
Operational Time per Tankful **	1 hour	1 hour	1 hour	2.7 hours	2 hours	2 hours
Wheel/Tire Size	178 cm (7 in.)	178 cm (7 in.)	178 cm (7 in.)	N/A	N/A	N/A
Overall Length	126 cm (49.6 in.)	126 cm (49.6 in.)	126 cm (49.6 in.)	145.5 cm (57.3 in.)	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)
Overall Width	53 cm (20.9 in.)	53 cm (20.9 in.)	53 cm (20.9 in.)	56.5 cm (22.2 in.)	63 cm (24.8 in.)	63 cm (24.8 in.)
Overall Height	103 cm (40.6 in.)	103 cm (40.6 in.)	103 cm (40.6 in.)	115 cm (45.3 in.)	110.5 cm (43.5 in.)	123 cm (48.4 in.)
Dry Weight	40.3 kg (88.8 lb.)	42.2 kg (93 lb.)	38 kg (83.8 lb.)	75 kg (165 lb.)	105 kg (231.5 lb.)	115 kg (253.5 lb.)
Lighting Coil	N/A	N/A	N/A	Standard	Standard	Standard
Work Light	N/A	N/A	N/A	Standard	Standard (type LED)	Standard (type LED)
Distributor's Warranty (non-commercial use)	24-month	24-month	24-month	36-month	36-month	36-month
Distributor's Warranty (commercial use)	12-month	12-month	24-month	36-month	36-month	36-month

Snowblower Specifications

	Dual-Stage					
SPECIFICATIONS	71 cm (28 in.), Wheel Drive	71 cm (28 in.), Track Drive	71 cm (28 in.), Track Drive, ES	81 cm (32 in.), Track Drive	81 cm (32 in.), Track Drive, ES	92 cm (36 in.), Track Drive, Hybrid i-Control, ES
Model Code	HSS928CW	HSS928CT	HSS928CTD	HSS1332CT	HSS1332CTD	HSM1336IKCD Hybrid
Discharge Type	Dual-stage	Dual-stage	Dual-stage	Dual-stage	Dual-stage	Dual-stage
Axle Type	Wheel drive	Track drive	Track drive	Track drive	Track drive	Track drive
Drive Type	Hydrostatic transmission (HST) with Steering Assist Drive System	Hydrostatic transmission (HST) with Steering Assist Drive System	Hydrostatic transmission (HST) with Steering Assist Drive System	Hydrostatic transmission (HST) with Steering Assist Drive System	Hydrostatic transmission (HST) with Steering Assist Drive System	Electric i-Control (24 VDC drive motors)
Transmission Oil Capacity	1.94 - 1.97 L	1.94 - 1.97 L	1.94 - 1.97 L	1.94 - 1.97 L	1.94 - 1.97 L	0.3 L (10.6 fl. Imp. oz.)
Recommended Oil	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
Speeds	Infinitely variable	Infinitely variable	Infinitely variable	Infinitely variable	Infinitely variable	Infinitely variable (Load control)
Maximum Ground Speed	Forward: 84 m/min. (275.6 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 66 m/min. (216.5 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 66 m/min. (216.5 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 42 m/min. (137.8 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 42 m/min. (137.8 ft./min)	Forward: 50 m/min. (164 ft./min) Reverse: 35 m/min. (114.8 ft./min)
Clearing Width	71 cm (28 in.)	71 cm (28 in.)	71 cm (28 in.)	81 cm (31.9 in.)	81 cm (31.9 in.)	92 cm (36.2 in.)
Intake Housing Height	55 cm (21.7 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)	58 cm (22.8 in.)
Auger Diameter	35.5 cm (14 in.)	35.5 cm (14 in.)	35.5 cm (14 in.)	35.5 cm (14 in.)	35.5 cm (14 in.)	39.8 cm (15.7 in.)
Auger Type	Steel serrated (Spiral)	Steel serrated (Spiral)	Steel serrated (Spiral)	Steel serrated (Spiral)	Steel serrated (Spiral)	Steel serrated (Spiral)
Auger Drive	Belt driven shaft	Belt driven shaft	Belt driven shaft	Belt driven shaft	Belt driven shaft	Belt driven shaft, electromagnetic clutch
Auger Transmission	Screw gear	Screw gear	Screw gear	Screw gear	Screw gear	Worm gear
Auger Oil Capacity	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.15 L (5.3 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.15 L (5.3 fl. Imp. oz.)	0.2 L (7 fl. Imp. oz.)
Recommended Oil	SAE 75W90 GL-5	SAE 75W90 GL-5	SAE 75W90 GL-5	SAE 75W90 GL-5	SAE 75W90 GL-5	SAE #90 gear oil
Auger Height Adjustment	Skid shoes	Gas assist	Gas assist	Gas assist	Gas assist	Electric auger-height adjuster (Automatic raise at return path)
Chute Rotation	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control
Chute Turning Radius	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)	240°
Deflection Control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control	Remote electric "Joystick" control
Chute Material	Steel	Steel	Steel	Steel	Steel	Steel
Maximum Throw Distance*	16 m (52.5 ft.)	16 m (52.5 ft.)	16 m (52.5 ft.)	17 m (55.8 ft.)	17 m (55.8 ft.)	19 m (62.3 ft.)
Clearing Snow Volume Capacity (Approximate)*	Up to 52 metric tons/hr (57 tons/hr)	Up to 52 metric tons (57 tons/hr)	Up to 52 metric tons (57 tons/hr)	Up to 75 metric tons (83 tons/hr)	Up to 75 metric tons (83 tons/hr)	Up to 83 metric tons (91 tons/hr)
Engine Type	4-stroke, OHV, single-cylinder	4-stroke, OHV, single-cylinder	4-stroke, OHV, single-cylinder	4-stroke, OHV, single-cylinder	4-stroke, OHV, single-cylinder	4-stroke, OHV, single-cylinder
Honda Engine Model	GX270T2	GX270T2	GX270T2	GX390T2	GX390T2	i-GX390T2
Displacement	270 cc (16.5 CID)	270 cc (16.5 CID)	270 cc (16.5 CID)	389 cc (23.7 CID)	389 cc (23.7 CID)	389 cc (23.7 CID)
Ignition System	CDI magneto	CDI magneto	CDI magneto	CDI magneto	CDI magneto	CDI magneto
Recoil Starter	Standard	Standard	Standard (Back-up)	Standard	Standard (Back-up)	N/A
Electric Starter	N/A	N/A	Standard 12 VDC type	N/A	Standard 12 VDC type	Standard 24 VDC type
Lubrication System	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash
Oil Capacity	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)
Recommended Oil	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
Recommended Fuel	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)
Fuel Capacity	5.3 L (1.17 Imp. gal.)	5.3 L (1.17 Imp. gal.)	5.3 L (1.17 Imp. gal.)	6.1 L (1.34 Imp. gal.)	6.1 L (1.34 Imp. gal.)	5.7 L (1.25 Imp. gal.)
Operational Time per Tankful **	2.3 hours	2.3 hours	2.3 hours	1.9 hours	1.9 hours	1.6 hours
Wheel/Tire Size	15 x 5 - 6 (2 ply) tubeless/directional	N/A	N/A	N/A	N/A	N/A
Overall Length	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)	176 cm (69.3 in.)
Overall Width	77.5 cm (30.5 in.)	73.5 cm (28.9 in.)	73.5 cm (28.9 in.)	83.5 cm (32.9 in.)	83.5 cm (32.9 in.)	92 cm (36.2 in.)
Overall Height	110.5 cm (43.5 in.)	110.5 cm (43.5 in.)	110.5 cm (43.5 in.)	123 cm (48.4 in.)	123 cm (48.4 in.)	134 cm (52.8 in.)
Dry Weight	105 kg (231.5 lb.)	120 kg (264.6 lb.)	125 kg (275.6 lb.)	125 kg (275.6 lb.)	135 kg (297.6 lb.)	240 kg (529.1 lb.)
Lighting Coil	Standard	Standard	Standard	Standard	Standard	Standard
Work Light	Standard (type LED)	Standard (type LED)	Standard (type LED)	Standard (type LED)	Standard (type LED)	Standard (24 VDC, 40 watt)
Distributor's Warranty (non-commercial use)	36-month	36-month	36-month	36-month	36-month	36-month
Distributor's Warranty (commercial use)	36-month	36-month	36-month	36-month	36-month	36-month

*Maximum throw distance and approximate snow clearing volume capacity will vary with individual snow conditions.

**Actual fuel consumption depends on operating load.

Generators

Today, Honda generators are found hard at work around the world—from challenging remote locations to our very own harsh climate conditions found throughout Canada. Over 50 years of Power Equipment development and innovation by Honda engineers have given rise to a lengthy line of hard-working generators and applications built to suit your needs.

Inverter/Economy/Cyclo-Converter/Premium

Trusted Performance

Honda generators are powered by proven 4-stroke Honda engines that don't mix oil and gas. This offers many advantages, including clean and quiet operation, few fill-ups, low ownership costs and low emissions.

Super Quiet Operation

Honda Super Quiet portable generators feature exhaust and muffler technology engineered to lower noise ratings within the 48-60 dB(A) ranges, so you'll have to worry less about disturbing your neighbours—or your own peace and quiet.

Cold Climate Technology™

Available on all models, Honda Cold Climate Technology™ is specifically designed for cold



Canadian climates. This standard-issued breather heater system helps prevent generator shutdown in freezing conditions, so you don't get left out in the cold.

Light & Compact

Our latest inverter generators are smaller, lighter and quieter than ever before. Many Honda generators produce voltage that is smoother and more consistent than commercially available power sources.

Dual-Voltage Selection

Honda high-output generators offer dual electrical standby power and are available in 4,000 to 10,000 watt models. The dual-voltage configuration allows you to power up appliances that require 120 or 240 volts.





CSA Approved

All Honda Generators purchased in Canada meet or exceed Canadian Standards Association (CSA) safety and Environmental Protection Agency (EPA) emissions standards. Not all manufacturers of portable generators can make this claim.

Power Sensitive Electronics

Honda was first to develop generators capable of powering sensitive electronics. Inverter technology regulates surges of raw power and smooths them out to the same high-quality electricity as the outlets in your home. The inverter models range from 1,000 to 7,000 watts to power everything from a laptop to a cottage.

Easy Operation

From intuitive features and ease-of-use to the carefully crafted reliability of portable power, all Honda generator controls are easily accessible and designed for ultimate convenience.

Long-Lasting Quality

Premium Honda generators are premium products offering rugged yet clever design—specifically tested and proven to perform in some of the toughest situations—with long-lasting quality you can count on.

Superior Warranty

Honda generators feature proven quality and reliability, along with a trusted warranty protection up to 36 months, and the support of a convenient Honda retailer network offering exceptional service.



U.S. model shown

*Based on TraQline Canada independent market share analysis of portable generator units sold in Canada from June 2016—March 2020.

Honda **POWER EQUIPMENT**

Inverter Series

Compact and quiet, with the ability to power even the most sensitive electronic equipment.



Ultra-Quiet 1000i

EU1000i

- Lightweight and portable 13 kg (28.7 lb.)
- Recommended for TVs, lights, fans, small power tools and more
- Inverter, stable power of 1,000 watts, at 120 VAC
- Up to 3 hours of power at maximum rated output, up to 7 hours at 25% output on a tank of gas
- Parallel-connect capability with another EU1000i



Ultra-Quiet 2200i

EU2200i

- 2,200 watts of Honda inverter 120 VAC power
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability
- Whisper-quiet operation—57 dB(A) at rated load, 48 dB(A) at 25% load
- Easy to carry—21.1 kg (46.5 lb)
- Double your power, connect it with a EU2200i Companion model for up to 4,400 watts maximum of power (3600 watts rated)



Ultra-Quiet 2200i Companion

EU2200i Companion

- 2,200 watts of Honda inverter 120 VAC power
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability
- Easy to carry—21.1 kg (46.5 lb)
- Double your power, connect it with a EU2200i model for up to 4,400 watts maximum of power (3600 watts rated)

Ultra-Quiet 2200i Combination

EU2200i + EU2200i Companion

- Easily paired together (Ultra-Quiet 2200i and Ultra-Quiet 2200i Companion) for parallel connectivity
- Uses simple cord connection, no external box necessary
- Power up to 4,400 watts with expandable parallel connectivity
- Great for home, RV, and cottage back-up power, outdoor enthusiasts, street vendors



Ultra-Quiet 2200i GFCI

EB2200i GFCI

- 2,200 watts of Honda inverter 120 VAC power
- Whisper-quiet operation—57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry—21.1 kg (46.5 lb.)
- GFCI Duplex Receptacle, Neutral Bonded
- Ideal for jobsite applications, modern hot air furnaces, sensitive equipment & electronics



Inverter Series

Generally used for camping, RVing, home appliances, power tools and more.



Ultra-Quiet 3000i

EU3000iK

- Lightweight and portable with wheels and a folding handle
- Suitable for many larger household appliances, great for RVing (will power a 13,500 BTU/h air conditioner)
- Inverter, stable power of 3,000 watts, at 120 VAC
- Up to 3.5 hours of power at maximum rated output, up to 7.7 hours at 25% output on a tank of gas



Ultra-Quiet 3000i ES

EU3000iS

- Powers most furnaces, fridges, microwaves, most 13,500 BTU/h RV AC units; great for RVing and more
- Inverter—stable power of 3,000 watts, at 120 VAC
- Up to 7.2 hours of power at maximum rated output, up to 20 hours at 25% output on a tank of gas
- Electric start and back-up recoil start



Economy 2800

EG2800iC

- At only 67 lbs, this lightweight inverter generator with Eco-Throttle™ gives you portable home backup and DIY power to keep the basics running during a power outage
- Inverter, stable power of 2,800 watts max. (2,500 watts rated)
- 5.1 hours of power at the rated load, up to 12.1 hours at 25% output per tankful
- User-friendly; the control panel includes step by step instructions to start the unit

Ultra-Quiet 7000i ES

EU7000iS

- Fuel injected—better fuel efficiency and lower maintenance
- Inverter, stable power of 7,000 watts, at 120/240 VAC
- Perfect for home and cottage back-up power, outdoor events and commercial worksites
- Up to 6.5 hours of power at maximum rated output, up to 18 hours at 25% output on a tank of gas
- Electric start and back-up recoil start



Economy Series

Budget-friendly and convenient, delivering stable, portable power without sacrificing on durability or performance. Provides reliable back-up power for your home, cottage, hobby farm and more.



Economy 5000

EG5000

- Economic, portable power of 5,000 watts, at 120/240 VAC
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- Up to 7.5 hours of power at maximum rated output, up to 11 hours at 50% output on a tank of gas



Economy 6500

EG6500

- Economic, portable power of 6,500 watts, at 120/240 VAC
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- Up to 7.1 hours of power at maximum rated output, up to 10 hours at 50% output on a tank of gas



Premium Series

The number one choice in the construction and rental industry, these portable generators offer plenty of smooth power without sacrificing on durability or performance.



Commercial 10000 GFCI ES EB10000

- Designed for the rigours of daily industrial/commercial usage and rental applications
- 10,000 watts of power in dual-voltage configuration with GFCI protection
- Convenient 12 VDC electric start
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- 31-litre fuel tank provides up to 6.5 hours of continuous power at maximum rated output, or up to 8.5 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied
- Hanger kit/lifting eye, wheel kit with folding handle for easier moving around the job site



Commercial 5000 GFCI EB5000

- Designed for the rigours of daily commercial usage and rental applications
- 5,000 watts of power in dual-voltage configuration with GFCI protection
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output
- Hanger kit/lifting eye for easier moving around the job site



Commercial 6500 GFCI EB6500

- Designed for the rigours of daily commercial usage and rental applications
- 6,500 watts of power in dual-voltage configuration with GFCI protection
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output
- Hanger kit/lifting eye for easier moving around the job site



Electric Start 5000

EM5000S

- Perfect for home backup or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up
- 5,000 watts of power in dual-voltage configuration
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied



Electric Start 6500

EM6500S

- Perfect for home back-up or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up
- 6,500 watts of power in dual-voltage configuration
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied

The right wattage for the right amount of power





HOME	APPLICATION	Approximate wattage required for running	Approximate wattage required for starting
	Coffee Maker	1,750	1,750
	Dishwasher	1,450	1,800
	Electric Fry Pan	1,300	1,300
	Electric Range		
	6 in. element	1,500	1,500
	8 in. element	2,100	2,100
	Microwave Oven, 625 watts	625	800
	Toaster		
	2-slice	1,050	1,050
	4-slice	1,650	1,650
	Electric Blanket (queen size)	800	800
	Refrigerator or Freezer	700	2,200
	20" Box Fan or Table Fan	120	180
	Lights (as indicated on bulbs.)	(-)	(-)
	Clothes Washer	1,150	2,300
	Clothes Dryer		
	Gas	700	1,800
	Electric	5,750	1,800
	Dehumidifier	650	800
	Furnace Fan, gas or fuel oil		
	0.125 hp	500	1,000
	0.16 hp	750	1,500
	0.25 hp	900	1,800
	0.3 hp	1,000	1,800
	0.5 hp	1,200	2,500
	Sump Pump		
	0.3 hp	750	1,500
	0.5 hp	1,000	2,100
	Hair Dryer	300 to 1,500	300 to 1,500
	Clothes Iron	1,200	1,200
	Room Air Conditioner - 10,000 BTU	1,500	2,200
	Central Air Conditioner		
	10,000 BTU	1,500	2,200
	20,000 BTU	2,500	3,300
	24,000 BTU	3,800	4,950
	40,000 BTU	6,000	7,800
	Radio	50 to 200	50 to 200
	Television (colour)		
	20 in. (LCD)	65	65
	26 in. (LCD)	110	110
	36 to 42 in. (Plasma)	250	250
	50 to 60 in. (Plasma)	340	340
	VCR/ DVD	35 to 50	35 to 50
	Game Console	100	100
	Laptop	50 to 75	50 to 75
	Computer	150	150
	Modem	25	25
	Monitor		
	Tube Type	200 to 250	200 to 250
	LCD	30	30
	Printer	100	100
	RV Air Conditioner - 13,500 BTU	1,800	2,800
	Vacuum Cleaner		
	Upright	800	1,100
	Canister	1,100	1,500
	Garage Door Opener		
	0.25 hp	550	1,100
	0.3 hp	725	1,400

APPLICATION	Approximate wattage required for running	Approximate wattage required for starting
Air Compressor		
0.5 hp	1,000	2,000
1 hp	1,500	4,500
1.5 hp	2,200	6,000
2 hp	2,800	7,700
Bench Grinder		
6 in.	720	1,000
8 in.	1,400	2,500
10 in.	1,600	3,600
Electric Cultivator - 0.3 hp	700	1,400
Electric Hedge Trimmer - 18 in.	400	550
Electric Grass Trimmer	500	650
Drum Mixer - 0.25 hp	700	1,400
Flood Lights - Mercury Hallogen	1,000	1,000
Floor Polisher		
16 in. - 0.75 hp	1,400	3,100
20 in. - 1 hp	1,600	4,500
Power Hand Drill		
0.25 in.	350	350
0.375 in.	400	400
0.5 in.	600	600
Submersible		
Water Pump 400 gpm	200	400
Centrifugal. Type	500	650
Wet/ Dry Vacuum		
1.7 hp	900	900
2.5 hp	1,300	1,300
Saws		
Worm Drive (chop saw)	1,800	2,600
Band Saw	1,100	1,400
Circular Saw		
6.5 in.	800	1,200
7.25 in.	1,400	2,300
8.25 in.	1,800	3,000
Electric Chain Saw		
12 in. - 1.5 hp	900	1,100
14 in. - 2 hp	1,100	1,400
Table Saw		
1.7 hp	1,500	3,000
2.5 hp	1,800	4,500
Electric Welders		
70-amp	2,800	2,800
100-amp	3,600	3,600
200-amp	9,000	9,000
Kango Hammer	900	1,200
Farm Equipment		
Electric Fence (40 km/25 miles)	250	250
Stock Tank De-icer	1,000	1,000
Grain Cleaner	650	1,000
Portable Conveyer - 0.5 hp	1,000	2,400
Grain Elevator - 0.75 hp	1,400	3,000
Milk Cooler	1,100	2,300
Mixer - 3.25 cubic feet, 0.75 hp	2,800	7,700
Milking Machine - 2 hp	1,000	2,300

Note: Check your equipment or appliance for actual wattage requirement.





Watts ÷ AMPS = Volts | Watts ÷ Volts = AMPS | Volts x AMPS = Watts

Generator Specifications





INVERTER SERIES				
SPECIFICATIONS	Ultra-Quiet 1000i	Ultra-Quiet 2200i	Ultra-Quiet 2200i Companion	Ultra-Quiet 2200i GFCI
Model Code	EU1000i*	EU2200i Parallel†	EU2200i Companion†	EB2200iTC
Generator Type	Inverter	Inverter	Inverter	Inverter
Maximum AC Output (Watts)	1,000	2,200	2,200	2,200
AC Voltage Available	120	120	120	120
Maximum Continuous AC Output (Watts)	900	1,800	1,800	1,800
Max. Rated AC Amperage @ 120 V / 240 V	7.5 / -	15 / -	15.0 / - (30.0 / - in parallel operation)	15.0 / -
Ground Fault Circuit Interrupter (GFCI)	N/A	N/A	N/A	Standard
Frequency (Hertz)	60	60	60	60
Automatic Voltage Regulator	Standard	Standard	Standard	Standard
DC Output Volts / Amps	12 / 6.5	12 / 8.3	N/A	N/A
Common Duplex Receptacle Specifications	7.5 amps/120 VAC continuous is available as combined total from these two AC receptacles.	15.0 amps/120 VAC continuous is available as combined total from these two AC receptacles.	N/A	15.0 amps/120 VAC continuous is available as combined total from these two AC GFCI receptacles.
DC Receptacle Specifications	6.5 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A	N/A
DC Charging Cable	Standard	Standard	N/A	N/A
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	N/A	N/A	This receptacle (NEMA # L5-30R) will supply 30.0 amps at 120 VAC continuously in parallel operation.	N/A
 NEMA L5-30R 30 Amp 1-120 VAC	 NEMA L14-20R 20 Amp 1-120/240 VAC	 NEMA L14-30R 30 Amp 1-120/240 VAC	 C56364/5 50 Amp 1-120/240 VAC	
Engine Type	Honda GXH50T OHV, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled
Displacement	49.4 cc	121 cc	121 cc	121 cc
Starting System	Manual recoil	Manual recoil	Manual recoil	Manual recoil
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard
Auto Throttle	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard
Remote Start Capability	No	No	No	No
Fuel Tank Capacity	2 L (0.44 Imp. gal.)	3.6 L (0.79 Imp. gal.)	3.6 L (0.79 Imp. gal.)	3.6 litres (0.79 Imp. gal.)
Transport Wheels	N/A	N/A	N/A	N/A
Lifting Hook	N/A	N/A	N/A	N/A
Battery	N/A	N/A	N/A	N/A
Approximate Running Time (hrs.) / Tankful	3** / 7***	3.2** / 8.1***	3.2** / 8.1***	3.2** / 8.1***
Rated Fuel Consumption (litres/hr)	0.67**	1.14**	1.14**	1.14**
Noise Level dB(A) (1.5 m to 7 m)	57** / 52***	57** / 48***	57** / 48***	57** / 48***
Length (Without Handles and Wheels)	451 mm (17.8 in.)	509 mm (20 in.)	509 mm (20.0 in.)	509 mm (20.0 in.)
Length (With Handles and Wheels)	N/A	N/A	N/A	N/A
Width (Without Handles and Wheels)	242 mm (9.5 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)
Width (With Handles and Wheels)	N/A	N/A	N/A	N/A
Height (Without Lift-Hook)	379 mm (15 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)
Height (With Lift-Hook)	N/A	N/A	N/A	N/A
Dry Weight	13 kg (28.7 lbs.)	21.1 kg (46.5 lbs.)	21.1 kg (46.5 lbs.)	21.1 kg (46.5 lb.)
Cold Climate Technology™	Standard	Standard	Standard	Standard

*Two EU1000i units in parallel: 15 amps/120 volts continuous is available from the 20 amp T-slot receptacle. Note: 16.6 amps is available for approx. 30 min. †Optional parallel operation cable (part number: 08E93-HPK-123HI) required for parallel connectivity. Maximum continuous output in parallel operation is 3600 watts or 30 amps @ 120 VAC. **At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts.

Generator Specifications

	INVERTER SERIES			ECONOMY INVERTER	ECONOMY SERIES
SPECIFICATIONS	Ultra-Quiet 3000i	Ultra-Quiet 3000i ES	Ultra-Quiet 7000i ES	Economy 2800	Economy 6500
Model Code	EU3000iK	EU3000is	EU7000is	EG2800	EG6500
Generator Type	Inverter	Inverter	Dual inverter	Inverter	Brush type
Maximum AC Output (Watts)	3,000	3,000	7,000	2,800	6,500
AC Voltage Available	120	120	120 / 240	120	120 / 240
Maximum Continuous AC Output (Watts)	2,600	2,800	5,500	2,500	5,500
Max. Rated AC Amperage @ 120 V / 240 V	21.7 / -	23.3 / -	45.8 / 22.9	20.8 / -	45.8 / 22.9
Ground Fault Circuit Interrupter (GFCI)	N/A	N/A	N/A	N/A	N/A
Frequency (Hertz)	60	60	60	60	60
Automatic Voltage Regulator	Standard	Standard	PWM (Pulse Width Modulation)	PWM (Pulse Width Modulation)	Standard digital (DAVR)
DC Output Volts / Amps	12 / 8.3	12 / 8.3	N/A	N/A	N/A
Common Duplex Receptacle Specifications	21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	23.3 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps available from a single receptacle.	20.8 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps available from each single receptacle.
DC Receptacle Specifications	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. Important Note: AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A	N/A	N/A
DC Charging Cable	Standard	Standard	N/A	N/A	N/A
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	This receptacle (NEMA # L5-30R) will supply 21.7 amps at 120 VAC continuously	This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 20.8 amps at 120 VAC continuously	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously.
 NEMA L5-30R 30 Amp 1-120 VAC	 NEMA L14-30R 30 Amp 1-120/240 VAC	 NEMA L14-30R 30 Amp 1-120/240 VAC	 C56364/5 50 Amp 1-120/240 VAC		
Engine Type	Honda GX160T2 OHV, 4-stroke, air-cooled	Honda GX200T2 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled	Honda GC190LA	Honda GX390T2 OHV, 4-stroke, air-cooled
Displacement	163 cc	196 cc	389 cc	186 cc	389 cc
Starting System	Manual recoil	Electric/recoil	Electric/recoil	Manual recoil	Manual recoil
Low Level Oil Alert™ System	Standard	Standard	Standard (LED display)	Standard	Standard
Auto Throttle	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle™ Standard	N/A
Remote Start Capability	No	No	Optional	No	No
Fuel Tank Capacity	5.9 L (1.30 Imp. gal.)	13 L (2.86 Imp. gal.)	19.2 L (4.22 Imp. gal.)	8.1L (1.8 Imp. gal.)	24 L (5.28 Imp. gal.)
Transport Wheels	Standard	Optional wheel kits: 4-wheels, same size: P/N 06423-ZS9-T30 4-wheels, large RR & front swivel/locking wheels: P/N 06424-ZS9-000AH 2-wheels with telescoping handles: P/N 06425-ZS9-020AH	2-wheel kit standard	Optional 2-wheel kit: P/N 06425-Z43-001AH	Optional (P/N 06710-Z22-A40ZA)
Lifting Hook	N/A	N/A	Optional (P/N 06531-Z11- E00ZA)	N/A	Optional (P/N 06810-Z22-A30ZA)
Battery	N/A	Standard (P/N 31500-HNI-003AH)	Standard (P/N 31500-MCR-D02AH)	N/A	N/A
Approximate Running Time (hrs.) / Tankful	3.5** / 7.7***	7.2** / 20***	6.5** / 18 ***	5.1** / 12.1***	7.1** / 10****
Rated Fuel Consumption (litres/hr)	1.68**	1.78**	2.95**	1.60**	3.38**
Noise Level dB(A) (1.5 m to 7 m)	64** / 57***	58** / 48***	60**	69** / 61***	74**
Length (Without Handles and Wheels)	622 mm (24.5 in.)	655 mm (25.8 in.)	N/A	430 mm (16.9 in.)	681 mm (26.8 in.)
Length (With Handles and Wheels)	N/A	N/A	1,198 mm (47.2 in.)	N/A	N/A
Width (Without Handles and Wheels)	379 mm (14.9 in.)	445 mm (17.5 in.)	539 mm (21.2 in.)	448 mm (17.6 in.)	530 mm (20.9 in.)
Width (With Handles and Wheels)	N/A	N/A	700 mm (27.6 in.)	N/A	N/A
Height (Without Lift-Hook)	489 mm (19.3 in.)	555 mm (21.9 in.)	721 mm (28.4 in.)	481 mm (18.9 in.)	571 mm (22.5 in.)
Height (With Lift-Hook)	N/A	N/A	821 mm (32.3 in.)	N/A	N/A
Dry Weight	35.2 kg (77.6 lbs.)	59 kg (130 lbs.)	118.1 kg (260.4 lbs.)	29.9 kg (65.9 lbs.)	80 kg (176.4 lbs.)
Cold Climate Technology™	Standard	Standard	Standard	Standard	Standard

Generator Specifications

	PREMIUM SERIES				
SPECIFICATIONS	Commercial 5000 GFCI	Commercial 6500 GFCI	Commercial 10000 GFCI ES	Electric Start 5000	Electric Start 6500
Model Code	EB5000	EB6500	EB10000	EM5000S	EM6500S
Generator Type	Brush type	Brush type	Brush type	Brush type	Brush type
Maximum AC Output (Watts)	5,000	6,500	10,000	5,000	6,500
AC Voltage Available	120 / 240	120 / 240	120 / 240	120 / 240	120 / 240
Maximum Continuous AC Output (Watts)	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)	9,000	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)
Max. Rated AC Amperage @ 120 V / 240 V	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)	37.5 x 2 (75) / 37.5	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)
Ground Fault Circuit Interrupter (GFCI)	Standard	Standard	Standard	N/A	N/A
Frequency (Hertz)	60	60	60	60	60
Automatic Voltage Regulator	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard DAVR (Digital Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)
DC Output Volts / Amps	N/A	N/A	N/A	12 / 8	12 / 8
Common Duplex Receptacle Specifications	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 18.8 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.
DC Receptacle Specifications	N/A	N/A	N/A	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.	8 amps/12 VDC is available from these +/- thumb screw terminals. Important Note: AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type.
DC Charging Cable	N/A	N/A	N/A	Optional (P/N 32650-825-015)	Optional (P/N 32650-825-015)
High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 30 amps at 120/240 VAC continuously. This receptacle (CS6364/5) will supply 37.5 amps (9 kVA) at 240 VAC or 50 amps (6 kVA) at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.
   					
Engine Type	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda GX630H OHV, 90° V-Twin design, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled
Displacement	389 cc	389 cc	688 cc	389 cc	389 cc
Starting System	Manual recoil	Manual recoil	Electric	Electric/recoil	Electric/recoil
Low Level Oil Alert™ System	Standard	Standard	Standard	Standard	Standard
Auto Throttle	Standard	Standard	Standard	Standard	Standard
Remote Start Capability	No	No	No	Optional	Optional
Fuel Tank Capacity	23.5 L (5.17 Imp. gal.)	23.5 L (5.17 Imp. gal.)	31 L (6.82 Imp. gal.)	23.5 L (5.17 Imp. gal.)	23.5 L (5.17 Imp. gal.)
Transport Wheels	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard
Lifting Hook	Standard	Standard	Standard	Optional (P/N 06810-Z22- A30ZA)	Optional (P/N 06810-Z22- A30ZA)
Battery	N/A	N/A	Standard	Standard (P/N 31500-MCR-J01)	Standard (P/N 31500-MCR-J01)
Approximate Running Time (hrs.) / Tankful	8.1** / 11.2****	6.9** / 10.4****	5.4** / 7.9****	8.1** / 11.2****	6.9** / 10.4****
Rated Fuel Consumption (litres/hr)	2.90**	3.40**	4.77**	2.90**	3.40**
Noise Level dB(A) (1.5 m to 7 m)	72**	73**	72**	72**	73**
Length (Without Handles and Wheels)	681 mm (26.8 in.)	681 mm (26.8 in.)	973 mm (38.3 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)
Length (With Handles and Wheels)	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)	1,420/1,041 mm (55.9/50 in.) †	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)
Width (Without Handles and Wheels)	530 mm (20.9 in.)	530 mm (20.9 in.)	552 mm (21.7 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)
Width (With Handles and Wheels)	706 mm (27.8 in.)	706 mm (27.8 in.)	703 mm (27.7 in.)	706 mm (27.8 in.)	706 mm (27.8 in.)
Height (Without Lift-Hook)	719 mm (28.3 in.)	719 mm (28.3 in.)	695 mm (27.4 in.)	719 mm (28.3 in.)	719 mm (28.3 in.)
Height (With Lift-Hook)	773 mm (30.4 in.) standard	773 mm (30.4 in.) standard	891 mm (35.1 in.) standard	773 mm (30.4 in.) optional lift hook	773 mm (30.4 in.) optional lift hook
Dry Weight	94.6 kg (208.6 lbs.)	97.2 kg (214.3 lbs.)	183 kg (403.4 lbs.)	102.2 kg (225.3 lbs.)	104.8 kg (231 lbs.)
Cold Climate Technology™	Standard	Standard	Standard	Standard	Standard

At max. rated output (continuous) in Watts. *At 25% rated output (continuous) in Watts. ****At 50% rated output (continuous) in Watts.

**#1 SELLING
PORTABLE
GENERATOR
BRAND
IN CANADA***



Meet The Honda Winter Lineup

Find the right Honda products to get the job done. There are more than 300 Honda Power Equipment retailers nation-wide, providing you with quality services and care. Visit your local retailer or honda.ca for full product details and pricing.

Find a Honda Power Equipment retailer nearest to your community at powerequipment.honda.ca



Honda builds its Power Equipment to meet some of the toughest engineering standards in the world and formulates its oils and chemicals to those same high standards, thereby helping to maintain your Power Equipment at peak performance. You buy Honda because of its quality, performance and reliability. Why not match one of the finest products you can own with the finest oils and chemicals on the market? Don't settle for an imitation when you can buy the original.

Honda Genuine Accessories

Honda is synonymous with quality and performance. Whether you own a Honda vehicle, motorcycle, ATV, side-by-side or a product from the Power Equipment or Marine lineups, chances are your choice to purchase a Honda was based on reputation. Honda Genuine Accessories are no different. In fact, they are the only accessories that have been approved by the engineers who originally designed your Honda. This helps ensure that not only will they perform as they were designed to, but they'll fit right as well.

Honda Genuine Parts and Service

Honda Genuine Parts are made for your Honda. They help maintain the quality, reliability and performance of your product. When the time comes for you to service, repair or enhance your Honda, don't settle for an imitation. Only Honda Genuine Parts are specifically engineered to maintain the original operating specifications of your Honda and offer a perfect fit and finish every time. Let trained Honda technicians keep your Honda healthy with Honda Genuine Parts.



Honda Outdoors Canada



@HondaOutdoors

FPO FSC

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or honda.ca for full details. TMs - Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. *Based on TraQline Canada independent market share analysis of portable generator units sold in Canada from June 2016—March 2020.

Developed in Canada 2021.

HONDA

honda.ca