


Patio door fixed panel replacement

Removing the operating Patio door panel:


- Open the operating panel all the way.
- Remove the screws that are visible in the P-V2-96 panel interior stop (drawing one).
- Close the panel and remove the balance of the screws.
- At this point remove the interior stop. Please hold the panel in place while this interior stop is removed. If not the panel may fall.



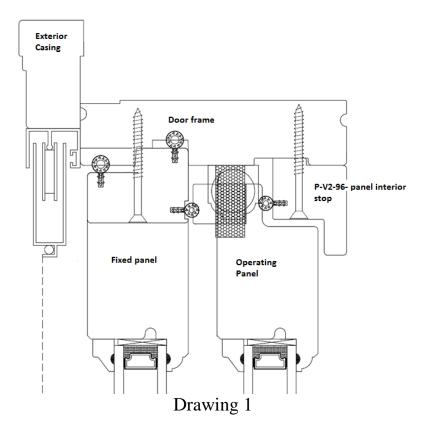

- Lift the panel up and out of the track.

Please note: This sash will be heavy and two people should be used to remove it.

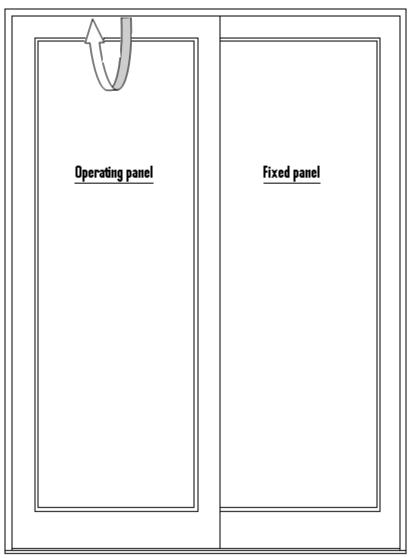


Drawing 2

.



Removing the fixed panel:

- Once the operating panel is removed remove the screws from the door stop (drawing 3).
- Remove the screws from part # P-V2-8 (drawing 3).



Drawing 3

- Remove the screws from part # P-V2-3, This is the part between the fixed panel and operating side jamb in the head jamb
- Slide the fixed panel toward the center of the door
- Tilt the panel toward the interior and remove

