


Typical Raised panel replacement

1. Before you remove, please examine the raised panel carefully to make sure it isn't damaged. Also measure it to make sure it's the right size.
2. Working from the exterior remove the glazing bead around the raised panel using a long blade utility knife to cut the silicone,
3. When the glazing beads are removed, from the inside cut the silicone from around the perimeter of the raised panel, this can be done by using a long blade utility knife.
4. Push the raised panel from the interior toward the exterior until it is free and can be removed.
5. Clean any old silicone, glazing tape and cut any staples or nails remaining.
6. Using an exterior grade silicone place a 1/8" bead of silicone around the interior glazing of opening.
7. Place the raised panel in and center it. Be sure to replace the vapor barrier between the 2 halves of the raised panel.
8. Install the new glazing beads using 1 or 1 1/4" brads or finishing nails. The glazing may have to be trimmed.
9. Fill any holes from the brads or nails with wood filler and touch up with paint or stain.

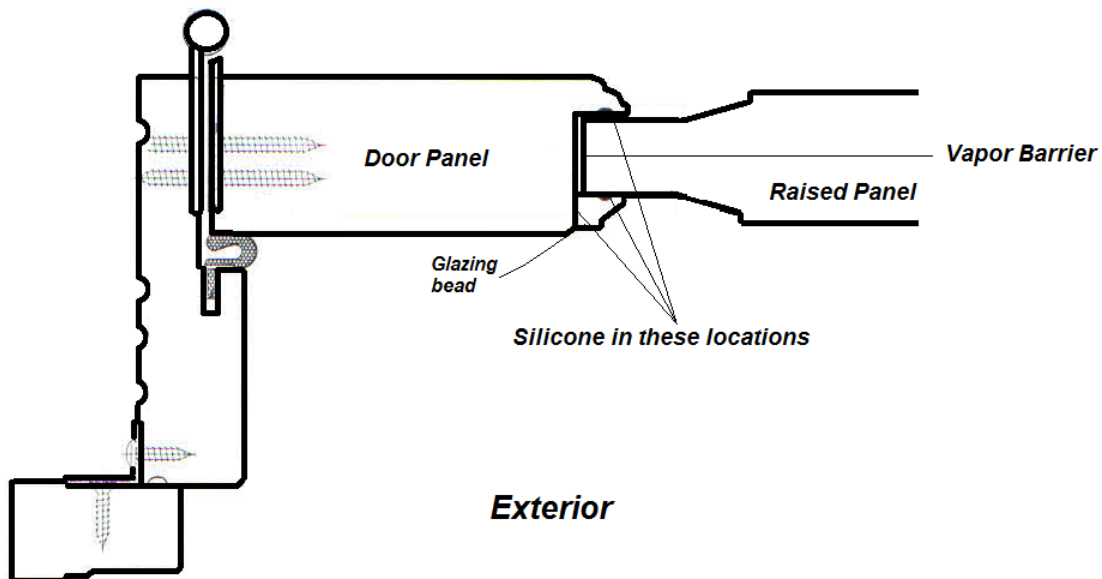

French door with raised panel